


■ DATA SHEET: MONITORING RELAYS UR6P3052

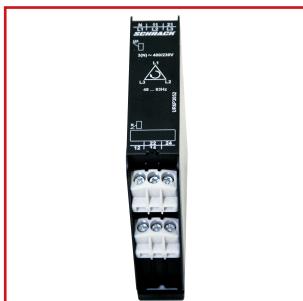

- Voltage monitoring in 3-phase mains
- Monitoring of phase sequence and phase failure
- Detection of reverse voltage
- Connection of neutral wire optional
- Supply voltage = measuring voltage
- 2 change-over contacts
- Width 22.5 mm
- Industrial design

■ TECHNICAL DATA

1. Functions

Monitoring of phase sequence, phase failure and detection of return voltage (by means of evaluating the asymmetry)

2. Time ranges

Start-up suppression time: Adjustment range fixed, max. 500ms
Tripping delay: fixed, max. 350ms

3. Indicators

Green LED ON: indication of supply voltage
Yellow LED ON/OFF: indication of relay output

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 60715
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
Tightening torque: max. 1Nm
Terminal capacity:
1 x 0.5 bis 2.5 mm² with/without multicore cable end
1 x 4 mm² without multicore cable end
2 x 0.5 bis 1.5 mm² with/without multicore cable end
2 x 2.5 mm² flexible without multicore cable end

5. Input circuit

Supply voltage:
3(N)~ 115/66V terminals (N)-L1-L2-L3 (G2PF115VS02)
(= measuring voltage)
3(N)~ 230/132V terminals (N)-L1-L2-L3 (G2PF230VS02)
(= measuring voltage)
3(N)~ 400/230V terminals (N)-L1-L2-L3 (G2PF400VS02)
(= measuring voltage)

Tolerance:
3(N)~ 115/66V 3(N)~ 99 to 132V (G2PF115VS02)
3(N)~ 230/132V 3(N)~ 198 to 264V (G2PF230VS02)
3(N)~ 400/230V 3(N)~ 342 to 457V (G2PF400VS02)

Rated frequency: 48 to 63Hz
Rated consumption:
3(N)~ 115/66V 3VA (G2PF115VS02)
3(N)~ 230/132V 6VA (G2PF230VS02)
3(N)~ 400/230V 9VA (G2PF400VS02)

Duration of operation:

100%

Reset time:

500ms

Residual ripple for DC:

-

Drop-out voltage:

>20% of the supply voltage

Oversupply category:

III (in accordance with IEC 60664-1)

Rated surge voltage:

4kV

6. Output circuit

2 potential free change-over contacts

250V AC

Switching capacity (distance <5 mm): 750VA (3A / 250V)

Switching capacity (distance >5 mm): 1250VA (5A / 250V)

Fusing: 5A fast acting

20 x 10⁶ operations

Mechanical life:

2 x 10⁵ operations

Electrical life: at 1000VA resistive load

max. 60/min at 100VA resistive load

max. 60/min at 1000VA resistive load (in accordance with IEC 60947-5-1)

Oversupply category:

III (in accordance with IEC 60664-1)

Rated surge voltage:

4kV

7. Measuring circuit

Measured variable: AC Sinus, (48 to 63Hz)

Input:

3(N)~ 115/66V terminals (N)-L1-L2-L3 (G2PF115VS02)

(= supply voltage)

3(N)~ 230/132V terminals (N)-L1-L2-L3 (G2PF230VS02)

(= supply voltage)

3(N)~ 400/230V terminals (N)-L1-L2-L3 (G2PF400VS02)

(= supply voltage)

Overload capacity:

3(N)~ 115/66V 3(N)~ 132/76V (G2PF115VS02)

3(N)~ 230/132V 3(N)~ 264/152V (G2PF230VS02)

3(N)~ 400/230V 3(N)~ 457/264V (G2PF400VS02)

Input resistance:

3(N)~ 115/66V 5kΩ (G2PF115VS02)

3(N)~ 230/132V 10kΩ (G2PF230VS02)

3(N)~ 400/230V 15kΩ (G2PF400VS02)

Asymmetry: fixed, typ. 30%

Oversupply category: III (according to IEC 60664-1)

Rated surge voltage: 4kV

8. Accuracy

Base accuracy:	-
Frequency response:	-
Adjustment accuracy:	-
Repetition accuracy:	-
Voltage influence:	-
Temperature influence:	-

9. Ambient conditions

Ambient temperature:	-25 to +55°C (in accordance with IEC 60068-1)
	-25 to +40°C (in accordance with UL 508)

Storage temperature:

-25 to +70°C

Transport temperature:

-25 to +70°C

Relative humidity:

15% to 85%

(in accordance with IEC 60721-3-3 class 3K3)

Pollution degree: 3 (in accordance with IEC 60664-1)

Vibration resistance: 10 to 55Hz 0.35 mm

(in accordance with IEC 60068-2-6)

Shock resistance:


15g 11ms

(in accordance with IEC 60068-2-27)

FUNCTIONS


Phase sequence monitoring

When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relays switch into on-position (yellow LED illuminated). When the phase sequence changes, the output relays switch into off-position (yellow LED not illuminated).

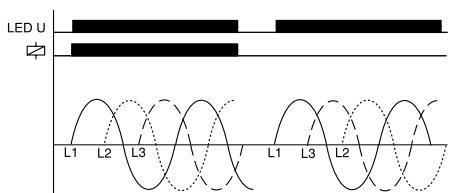

Phase failure monitoring


When one of the three phases fails, the output relays switch into off-position (yellow LED not illuminated).

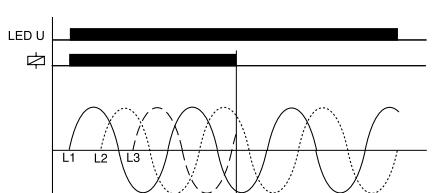


Detection of reverse voltage

(by means of evaluation of asymmetry)

The output relays switch into off-position (yellow LED not illuminated) when the asymmetry between the phase voltages exceeds the fixed value of the asymmetry. An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

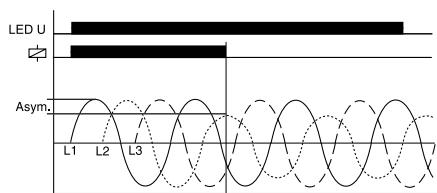

CONNECTIONS

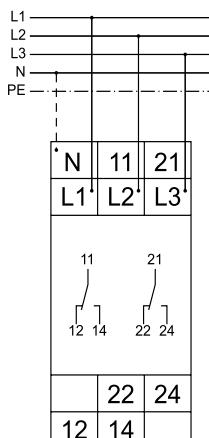

DIMENSIONS

