

■ DATA SHEET: MONITORING RELAYS UR611052



- AC/DC current monitoring in 1-phase mains
- Multifunction
- 16.6 to 400Hz
- Fault latch
- Zoom voltage 24 to 240V AC/DC
- 2 change-over contacts
- Width 22.5mm
- Industrial design

■ TECHNICAL DATA

1. Functions

AC/DC current monitoring in 1-phase mains with adjustable thresholds, timing for start-up suppression and tripping delay separately adjustable and the following functions (selectable by means of rotary switch)

OVER	Overcurrent monitoring
OVER+LATCH	Overcurrent monitoring with fault latch
UNDER	Undercurrent monitoring
UNDER+LATCH	Undercurrent monitoring with fault latch
WIN	Monitoring the window between Min and Max
WIN+LATCH	Monitoring the window between Min and Max with fault latch

2. Time ranges

	Adjustment range	
Start-up suppression time:	0s	10s
Tripping delay:	0.1s	10s

3. Indicators

Green LED ON:	indication of supply voltage
Green LED flashes:	indication of start-up suppression time
Yellow LED ON/OFF:	indication of relay output
Red LED ON/OFF:	indication of failure of the corresponding threshold
Red LED flashes:	indication of tripping delay of the corresponding threshold

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 60715
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
Tightening torque: max. 1Nm
Terminal capacity:
1 x 0.5 to 2.5 mm ² with/without multicore cable end
1 x 4 mm ² without multicore cable end
2 x 0.5 to 1.5 mm ² with/without multicore cable end
2 x 2.5 mm ² flexible without multicore cable end

5. Input circuit

Supply voltage:	24 to 240V AC/DC	terminals A1-A2 (galvanically separated)
Tolerance:	24 to 240V DC 24 to 240V AC	-20% to +25% -15% to +10%
Rated frequency:	24 to 240V AC 48 to 240V AC	48 to 400Hz 16 to 48Hz
Rated consumption:	4.5VA (1W)	4.5VA (1W)
Duration of operation:	100%	100%
Reset time:	500ms	500ms
Wave form for AC:	Sinus	Sinus
Residual ripple for DC:	10%	10%
Drop-out voltage:	>15% of the supply voltage	>15% of the supply voltage
Oversupply category:	III (in accordance with IEC 60661-1)	III (in accordance with IEC 60661-1)
Rated surge voltage:	4kV	4kV

6. Output circuit

2 potential free change-over contacts	250V AC
Rated voltage:	250V AC
Switching capacity (distance <5 mm):	750VA (3A / 250V AC)
Switching capacity (distance > 5mm):	1250VA (5A / 250V AC)
Fusing:	5A fast acting
Mechanical life:	20 x 10 ⁶ operations
Electrical life:	2 x 10 ⁵ operations at 1000VA resistive load
Switching frequency:	max. 60/min at 100VA resistive load
	max. 6/min at 1000VA resistive load
	(in accordance with IEC 60947-5-1)
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

7. Measuring circuit

Measured variable:	DC or AC Sinus (16.6 to 400Hz)
Input:	
20mA AC/DC	terminals K-I1(+)
1A AC/DC	terminals K-I2(+)
5A AC/DC	terminals K-I3(+)
Overload capacity:	
20mA AC/DC	250mA
1A AC/DC	3A
5A AC/DC	10A
Input resistance:	
20mA AC/DC	2.7Ω
1A AC/DC	47mΩ
5A AC/DC	10mΩ
Switching threshold:	
Max	10% to 100% of IN
Min	5% to 95% of IN
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

8. Accuracy

Base accuracy:	±5% (of maximum scale value)
Frequency response:	-10% to +5% (16.6 to 400Hz)
Adjustment accuracy:	" 5% (of maximum scale value)
Repetition accuracy:	" 2%
Voltage influence:	-
Temperature influence:	" 0.1% / °C

9. Ambient conditions


Ambient temperature:	-25 to +55°C (in accordance with IEC 60068-1)
Storage temperature:	-25 to +40°C (in accordance with UL 508)
Transport temperature:	-25 to +70°C
Relative humidity:	-25 to +70°C
Pollution degree:	15% to 85% (in accordance with IEC 60721-3-3 class 3K3)
Vibration resistance:	3 (in accordance with IEC 60664-1)
Shock resistance:	10 to 55Hz 0.35mm (in accordance with IEC 60068-2-6)
	15g 11ms (in accordance with IEC 60068-2-27)

FUNCTIONS

When the supply voltage U is applied, the output relays switch into on-position (yellow LED illuminated) and the set interval of the startup suppression (START) begins (green LED U flashes). Changes of the measured current during this period do not affect the state of the output relay. After the interval has expired the green LED is illuminated steadily. For all the functions the LEDs MIN and MAX are flashing alternating, when the minimum value for the measured current was chosen to be greater than the maximum value


Overcurrent monitoring (OVER, OVER+LATCH)

When the measured current exceeds the value adjusted at the MAXregulator, the set interval of the tripping delay (DELAY) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relays switch into off-position (yellow LED not illuminated). The output relays again switch into on-position (yellow LED illuminated), when the measured current falls below the value adjusted at the MIN-regulator (red LED MAX not illuminated). If the fault latch is activated (OVER+LATCH) and the measured current remains above the MAX-value longer than the set interval of the tripping delay, the output relays remain in the off-position even if the measured current falls below the value adjusted at the MIN-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relays switch into on-position and a new measuring cycle begins with the set interval of the start-up suppression (START).

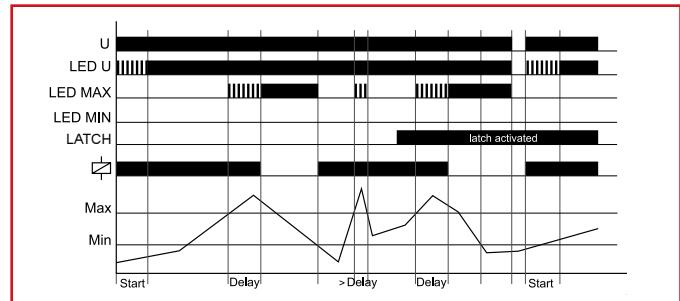

Undercurrent monitoring (UNDER, UNDER+LATCH)



When the measured current falls below the value adjusted at the MIN-regulator, the set interval of the tripping delay (DELAY) begins (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relays switch into off-position (yellow LED not illuminated). The output relays again switch into on-position (yellow LED illuminated), when the measured current exceeds the value adjusted at the MAX-regulator. If the fault latch is activated (UNDER+LATCH) and the measured current remains below the MIN-value longer than the set interval of the tripping delay, the output relays remain in the off-position even if the measured current exceeds the value adjusted at the MAX-regulator. After resetting the failure (interrupting and re-applying the supply voltage), the output relays switch into on-position and a new measuring cycle begins with the set interval of the start-up suppression (START).

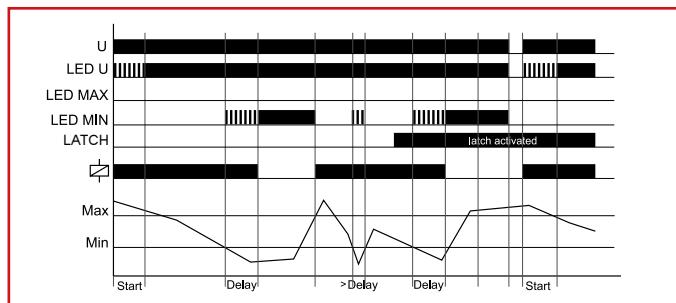

Window function (WIN, WIN+LATCH)


The output relays switch into on-position (yellow LED illuminated) when the measured current exceeds the value adjusted at the MINregulator. When the measured current exceeds the value adjusted at the MAX-regulator, the set interval of the tripping delay (DELAY) begins (red LED MAX flashes). After the interval has expired (red LED MAX illuminated), the output relays switch into off-position (yellow LED not illuminated). The output relays again switch into on-position (yellow LED illuminated) when the measured current falls below the value adjusted at the MAX-regulator (red LED MAX not illuminated). When the measured current falls below the value adjusted at the MINregulator, the set interval of the tripping delay (DELAY) begins again (red LED MIN flashes). After the interval has expired (red LED MIN illuminated), the output relays switch into off-position (yellow LED not illuminated).

If the fault latch is activated (WIN+LATCH) and the measured current remains below the MIN-value longer than the set interval of the tripping delay, the output relays remain in the off-position even if the measured current exceeds the value adjusted at the MIN-regulator. If the measured current remains above the MAX-value longer than the set interval of the tripping delay, the output relays remain in the offposition even if the measured current falls below the value adjusted at the MAX-regulator. After resetting the failure (interrupting and reapplying the supply voltage), the output relays switch into on-position and a new measuring cycle begins with the set interval of the start-up suppression (START).

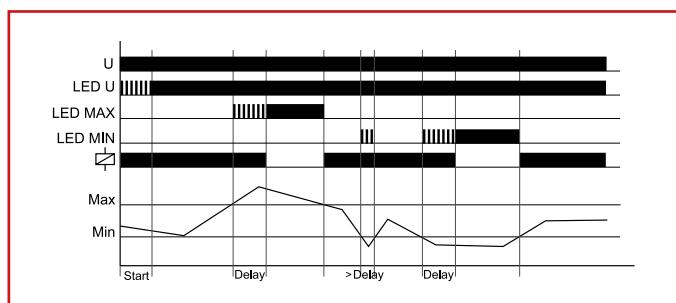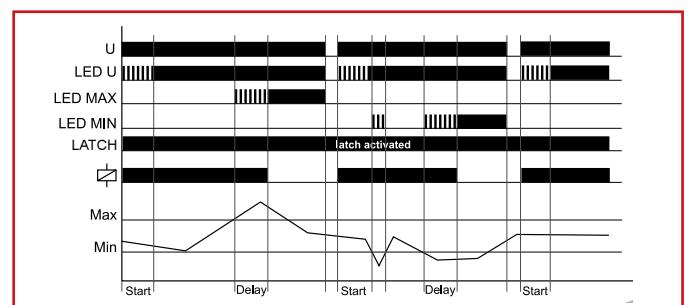


CONNECTIONS


Range 20mA, supply voltage 24 - 240 V AC/DC and fault latch

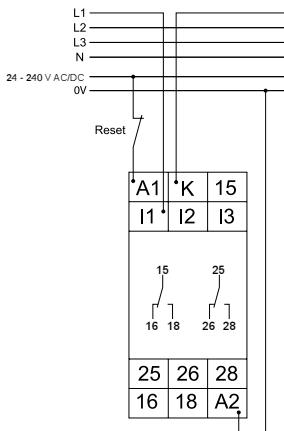

Range 1A, supply voltage 230V AC and fault latch

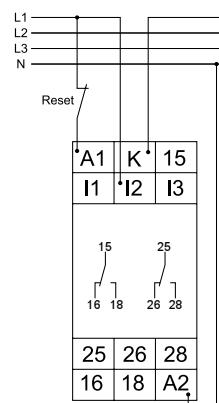

Range 5A, supply voltage 24 - 240 V AC/DC without fault latch

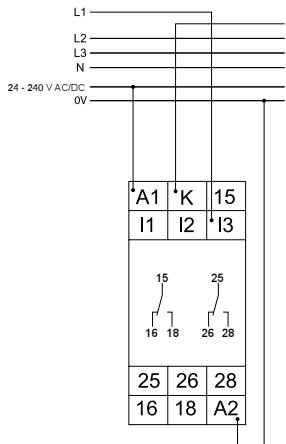

DIMENSIONS

