

## 10 Million Cycles, Contactless Hall Effect Technology

Designated the HP7 series, these momentary pushbutton switches utilize Hall effect sensor technology for long life contactless switching. Available in dusttight and moistureproof sealed configurations, these switches can also be watertight sealed to IP68S. The stylish dome-shaped pushbuttons are available in nine colors, and a mechanical detent option is available for tactile feedback.

Case and bezel are precision-machined aluminum alloy, available with either a black or clear coat anodized finish. Three case and button styles are offered in raised dome, flush dome and exposed dome styles. PC pins or wire leads are standard, with value-added connectors available.

This rugged switch is designed to withstand harsh environments while being subjected to high rates of actuation. Applications that require repeated “jogging” and other continuous operations are prime applications for the HP7 Hall effect switch. Examples can be found in material handling equipment such as wheel loaders, lift trucks, telehandlers, and other applications where positioning of the load is critical.

### HP7 Key Features:

- 10 million cycles
- Hall effect technology for long life
- Electronics sealed to IP64 or watertight to IP68S
- Stylish dome-shaped buttons in 9 colors
- Momentary action
- Choice of termination styles
- Mechanical detent available for tactile feedback
- RoHS compliant



#### Standard Characteristics/Ratings:

##### MECHANICAL:

<b>Mechanical Life:</b>	10,000,000 cycles without detent
<b>Button Travel:</b>	0.080 inches max
<b>Overtravel:</b>	0.010 inches min
<b>Operating Force:</b>	Without detent: 16 oz +/- 8 oz With detent: 28 oz +/- 8 oz
<b>Operating Point:</b>	0.040 inches +/- 0.010
<b>Electrical Life:</b>	10,000,000 cycles

##### ELECTRICAL RATINGS: Rated at Vcc = 5V @ 25°C Load = 1mA (4.7KΩ)

Electrical	Units	Min	Max
Supply Voltage	VDC	3.0	24
Reverse Output Voltage	VDC	N/A	0.5
Supply Current	mA	N/A	9
Continuous Output Current	mA	N/A	18
Reverse Battery Protection	VDC	N/A	-15

##### ELECTRONICS:

<b>Seal:</b>	IP64 or IP68S
--------------	---------------


##### ENVIRONMENTAL:

<b>Operating Temp Range:</b>	-40°C to +85°C
<b>Storage Temp Range:</b>	-60°C to +105°C


##### MATERIALS:

<b>Button:</b>	Thermoplastic
<b>Case:</b>	Aluminum alloy
<b>Mounting Hardware:</b>	Hex nut & lockwasher


## HP7-DE

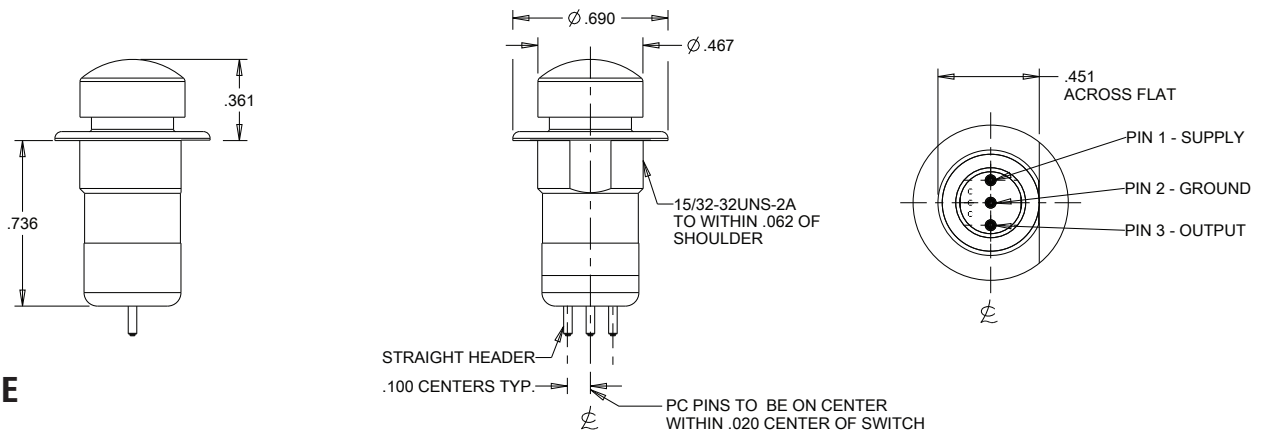

## HP7-DF

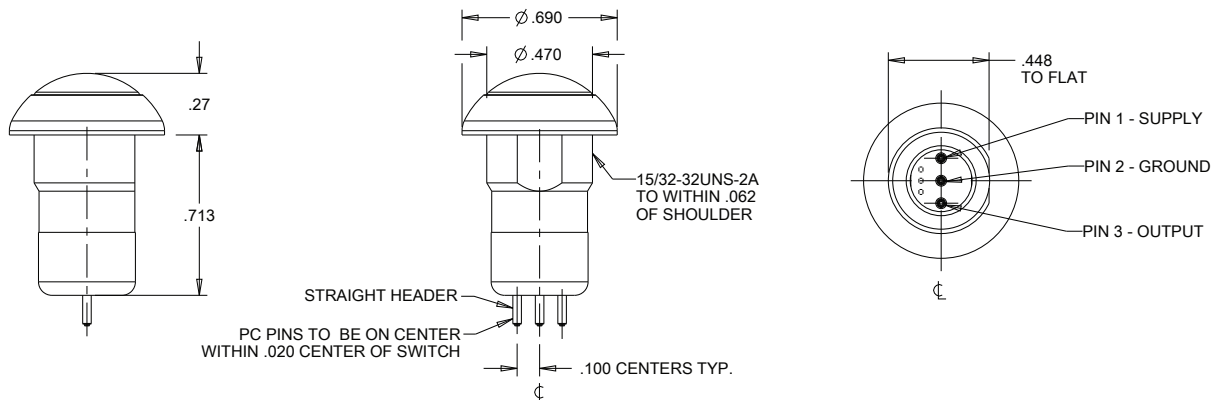

## HP7-DR

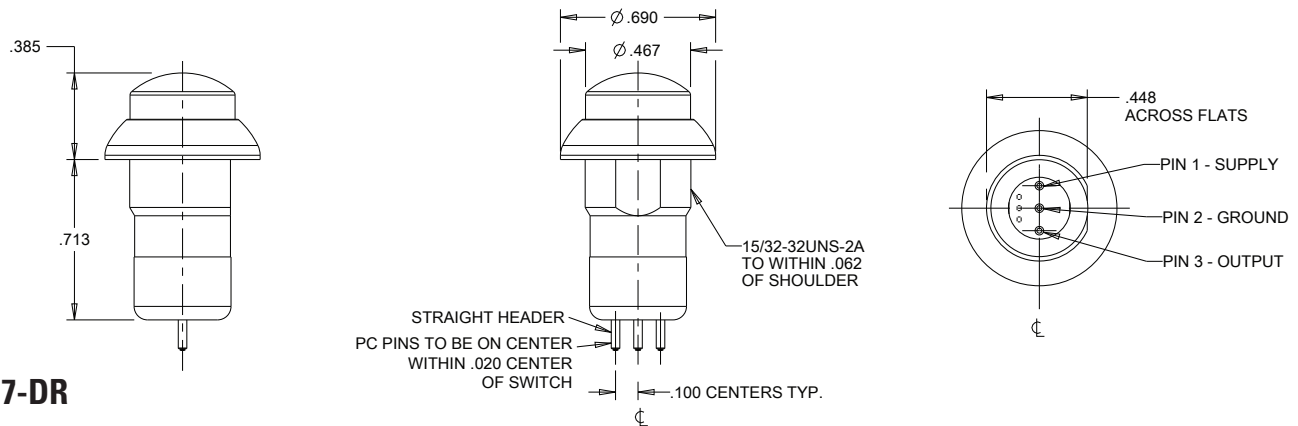

	PIN HEAD TERMINATION	WIRE LEAD TERMINATION
<b>A - Exposed Dome</b>	.736	.652
<b>B - Raised Dome</b>	.713	.628
<b>C - Flush Dome</b>	.713	.628