

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Axioline Smart Elements, Function module, Counter input: 1, Control input: 1, Counting direction input: 1, Digital output: 1, 24 V DC, 100 mA, degree of protection: IP20

Product description

You can integrate Axioline Smart Elements into systems with the Smart Element interface. This Smart Element detects and processes fast pulse sequences from sensors. The Smart Element has a counter input (source), a control input (gate), a counting direction input (direction) and a configurable output (OUT).

Your advantages

- 32-bit counter (up and down)
- Maximum input frequency: 150 kHz
- Activation of an output is based on a comparative value
- Counter control using a hardware or software gate
- Single or periodic count
- Protected 24 V sensor/actuator supply
- Device rating plate stored

Commercial data

Item number	1088131
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRIB63
Product key	DRIB63
GTIN	4055626887722
Weight per piece (including packing)	35.1 g
Weight per piece (excluding packing)	34.6 g
Customs tariff number	85389091
Country of origin	DE

AXL SE CNT1 - Function module

1088131

<https://www.phoenixcontact.com/au/products/1088131>



Technical data

Dimensions

Dimensional drawing		
Width		14.9 mm
Height		62.2 mm
Depth		62 mm

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Interfaces

Smart Element interface

Number of interfaces	1
Connection method	Card edge connector
Transmission speed	See system in which you use the Smart Element.
Start time until ready to operate	< 500 ms

System properties

Module

ID code (hex)	none
Process data channel	48 bit
Input address area	6 Byte
Output address area	6 Byte
Required parameter data	20 Byte
Required configuration data	7 Byte

Input data

Counter:

Input name	Counter input
Description of the input	EN 61131-2 type 1
Connection method	Push-in connection
Number of inputs	1 (Source)
Input voltage	24 V DC
Input voltage range "0" signal	-3 V DC ... 5 V DC

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Input voltage range "1" signal	15 V DC ... 30 V DC
Input frequency	max. 150 kHz
Input current	typ. 2.3 mA
Resolution	32 bits

Output data

Digital:

Output name	Digital output
Output description	Push-pull output (switches to GND at level 0)
Connection method	Push-in connection
Number of outputs	1 (OUT)
Protective circuit	Short-circuit and overload protection; electronic Surge protection; Suppressor diode
Output voltage	24 V DC

Product properties

Product type	I/O component
Product family	Axioline Smart Elements
Type	modular
Mounting position	See the system in which the Smart Element is used.

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Maximum power dissipation for nominal condition	1.75 W
---	--------

Potentials: Communications power supply of the Smart Elements (U_{SE})

Supply voltage	using card edge connectors
----------------	----------------------------

Potentials: I/O supply (U_P)

Supply voltage	24 V DC (using card edge connectors)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 700 mA typ. 620 mA
Current consumption	min. 20 mA (without connected peripherals)
Protective circuit	Surge protection; See the system in which the Smart Element is used. Reverse polarity protection; Polarity protection diode

Supply:

Designation	Sensor/actuator supply U_S
Supply voltage	24 V DC

Electrical isolation/isolation of the voltage ranges

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Test voltage: Communications supply / 24 V supply (I/O)	500 V AC, 50 Hz, 1 min
Test voltage: Communications supply / functional ground	500 V AC, 50 Hz, 1 min
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min

Connection data

Connection technology

Connection name	I/O
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline Smart Elements" user manual.

Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.25 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.25 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ²
Stripping length	8 mm

I/O

Connection method	Push-in connection
Note on the connection method	Please observe the information provided on conductor cross sections in the "Axioline Smart Elements" user manual.
Conductor cross section, rigid	0.25 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.25 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm ² ... 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Degree of protection	IP20
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

Mounting

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Mounting type	Smart Element slot
Mounting position	See the system in which the Smart Element is used.

AXL SE CNT1 - Function module


1088131

<https://www.phoenixcontact.com/au/products/1088131>




Drawings

Dimensional drawing

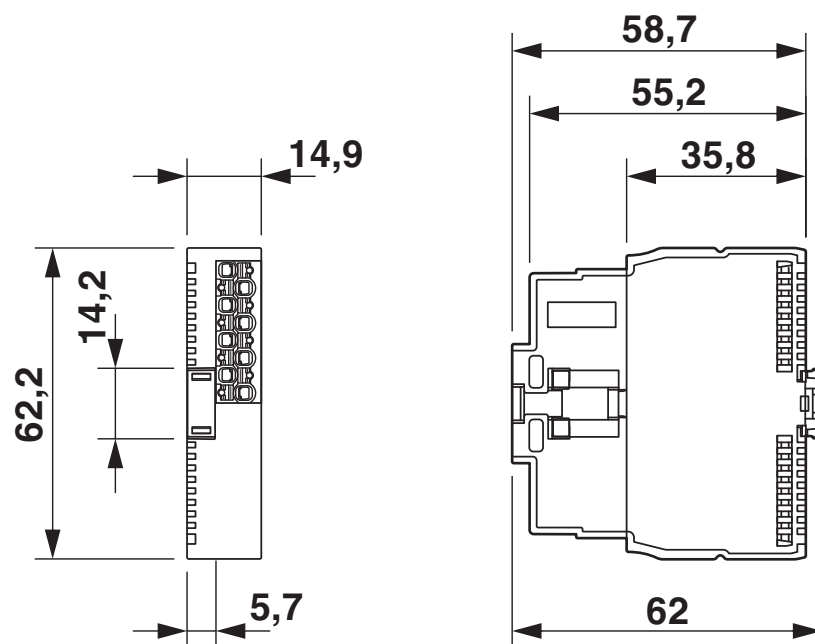


Dimensions

Connection diagram

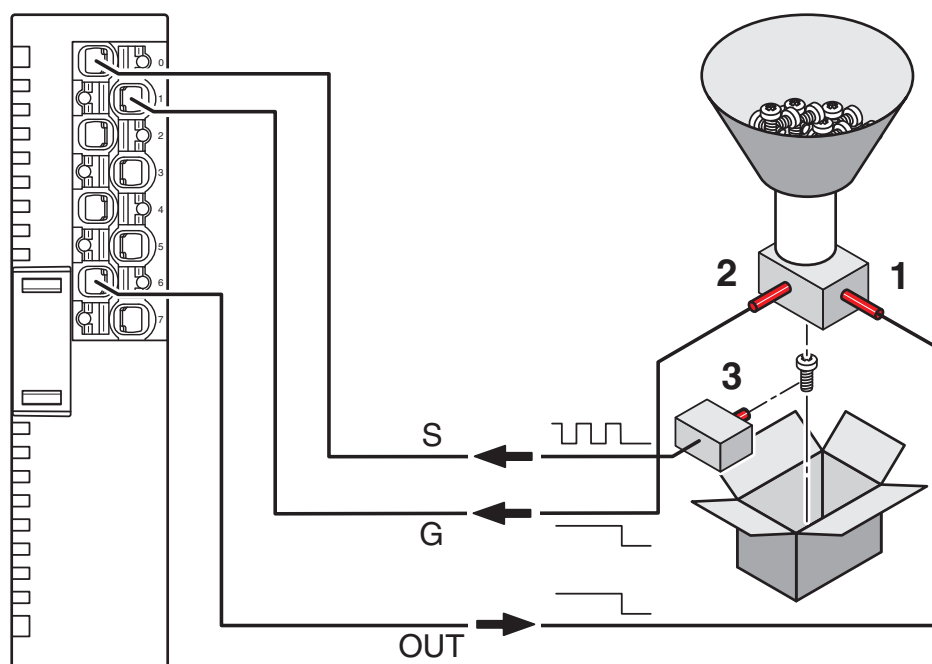

Connection example

Block diagram

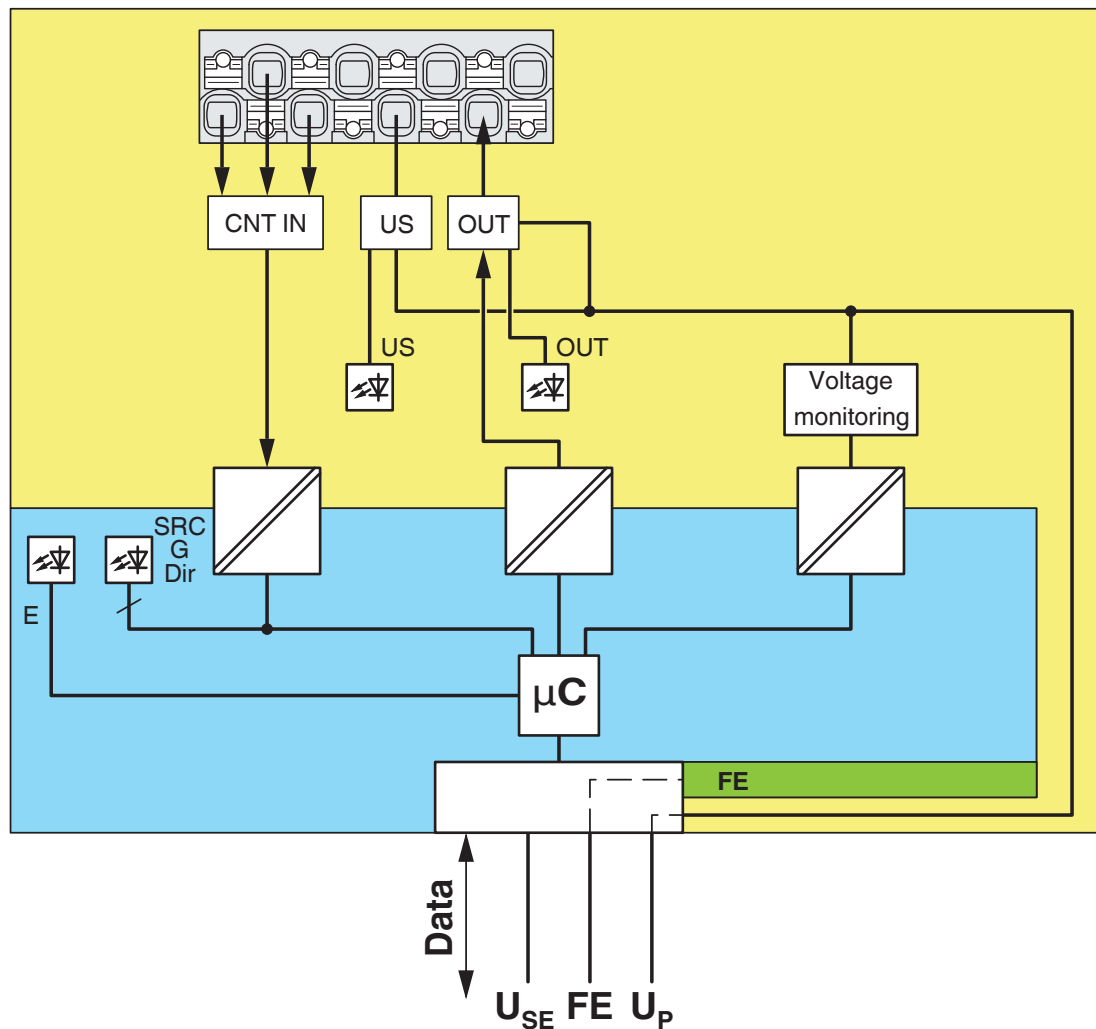

Internal wiring of the terminal points

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1088131>



cULus Listed

Approval ID: E238705

AXL SE CNT1 - Function module



1088131

<https://www.phoenixcontact.com/au/products/1088131>

Classifications

ECLASS

ECLASS-13.0	27242605
-------------	----------

ETIM

ETIM 9.0	EC001601
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	468def8-cfcd-458e-a095-dae07f558968