

DATA SHEET: MONITORING RELAYS UR6R1052



- Temperature monitoring of the motor winding
- 2 change-over contacts
- External reset key connectable
- Width 22.5mm
- Industrial design

TECHNICAL DATA

1. Functions

Temperature monitoring of the motor winding (max. 6 PTC) with fault latch, for temperature probes in accordance with DIN 44081
Test function with integrated test/reset key

2. Time ranges

	Adjustment range
Start-up suppression time:	-
Tripping delay:	-

3. Indicators

Green LED ON:	indication of supply voltage
Red LED ON/OFF:	indication of failure

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
Mounted on DIN-Rail TS 35 according to EN 60715
Mounting position: any
Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
Tightening torque: max. 1Nm
Terminal capacity:

- 1 x 0.5 to 2.5 mm² with/without multicore cable end
- 1 x 4 mm² without multicore cable end
- 2 x 0.5 to 1.5 mm² with/without multicore cable end
- 2 x 2.5 mm² flexible without multicore cable end

5. Input circuit

Supply voltage:	230V AC/DC	terminals A1-A2 (galvanically separated)
Tolerance:	-15% to +10%	
Rated frequency:	50/60 Hz	
Rated consumption:	4.5VA (1W)	
Duration of operation:	100%	
Reset time:	500ms	
Wave form for AC:	Sinus	
Residual ripple for DC:	10%	
Drop-out voltage:	>15% of the supply voltage	
Overvoltage category:	III (in accordance with IEC 60661-1)	
Rated surge voltage:	4kV	

6. Output circuit

2 potential free change-over contacts	
Rated voltage:	250V AC
Switching capacity (distance <5 mm):	750VA (3A / 250V AC)
Switching capacity (distance >5 mm):	1250VA (5A / 250V AC)
Fusing:	5A fast acting
Mechanical life:	20 x 10 ⁶ operations
Electrical life:	2 x 10 ⁸ operations
	at 1000VA resistive load
Switching frequency:	max. 60/min at 100VA resistive load
	max. 6/min at 1000VA resistive load (in accordance with IEC 60947-5-1)
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

7. Measuring circuit

Input:	terminals T1-T2
Initial resistance:	<1.5k Ω
Response value (relay in off-position):	" 3.6k Ω
Release value (relay in on-position):	" 1.8k Ω
Disconnection (short circuit thermistor):	no
Measuring voltage T1-T2:	" 2.5V DC at R " 4.0k Ω (in accordance with DIN VDE 0660 part 302)
Overvoltage category:	III (in accordance with IEC 60664-1)
Rated surge voltage:	4kV

8. Control contact R

Function:	external reset key
Loadable:	no
Line length R-T2:	max. 10m (twisted pair)
Control pulse length:	-
Reset:	potential free normally open contact, terminals R-T2

9. Accuracy



Base accuracy:	\pm 10% (of maximum scale value)
Frequency response:	-
Adjustment accuracy:	-
Repetition accuracy:	" 1%
Voltage influence:	" 2.2%
Temperature influence:	" 0.1% / °C

10. Ambient conditions


Ambient temperature:	-25 to +55°C (in accordance with IEC 60068-1) -25 to +40°C (in accordance with UL 508)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (in accordance with IEC 60721-3-3 class 3K3)
Pollution degree:	3 (in accordance with IEC 60664-1)
Vibration resistance:	10 to 55Hz 0.35mm (in accordance with IEC 60068-2-6)
Shock resistance:	15g 11ms (in accordance with IEC 60068-2-27)

FUNCTIONS

If the supply voltage U is applied (green LED illuminated) and the cumulative resistance of the PTC-circuit is less than 3.6kΩ (standard temperature of the motor), the output relays switch into on-position. Pressing the test/reset key under this conditions forces the output relays to switch into off-position. They remain in this state as long as the test/reset key is pressed and thus the switching function can be checked in case of fault. The test function is not effective using an external reset key. When the cumulative resistance of the PTC-circuit exceeds 3.6kΩ (at least one of the PTCs has reached the cut-off temperature), the output relays switch into off-position (red LED illuminated). The output relays again switch into on-position (red LED not illuminated), if the cumulative resistance drops below 1.8kΩ by cooling down of the PTC and either a reset key (internal or external) was pressed or the supply voltage was disconnected and re-applied.

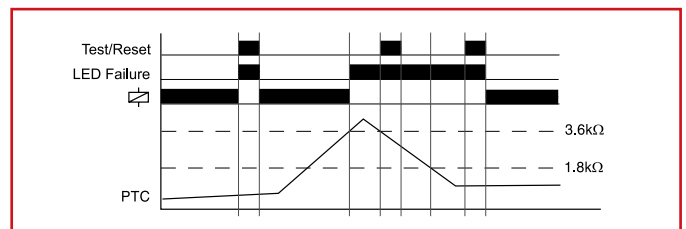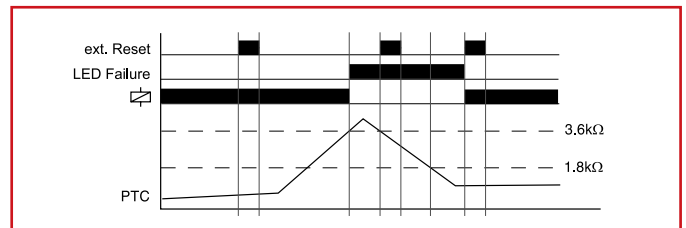

CONNECTIONS

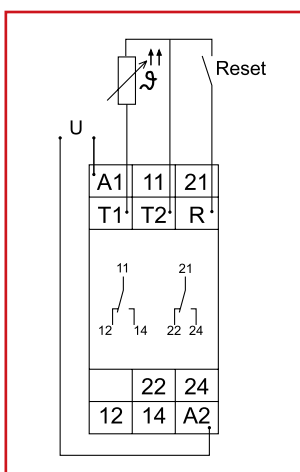

DIMENSIONS

