

Data Sheet for Article: YRTS0725--

Socket with screw terminals, 5mm, conventional arrangement


for XT, RT2x, RT3x, RT4x relays




Technical Data

Net weight (kg)	0,04
Min. ambient temperature (°C)	-40
Max. ambient temperature (°C)	85
Connection type	Screw clamps
Initial breakdown voltage	
Between poles	2500V/S
Between contact and coil	4000V/S
Rated voltage	300V
Rated current (A)	10
Max. tightening torque (Nm)	1
Temperature range - Operation (°C)	-40 to +85
Solid wire diameter (mm ²)	0.5 - 2.5
Flexible wire diameter (mm ²)	0.5 - 2.5
Flexible wire with ferrule (diameter) (mm ²)	0.5 - 2.5

Circuit diagram: Socket with screw terminals, 5mm, conventional arrangement

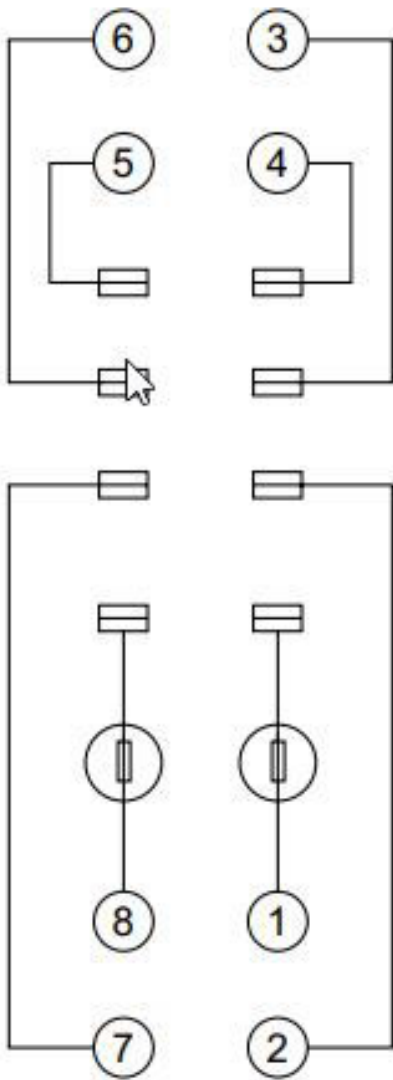

Dimensioned drawing: Socket with screw terminals, 5mm, conventional arrangement

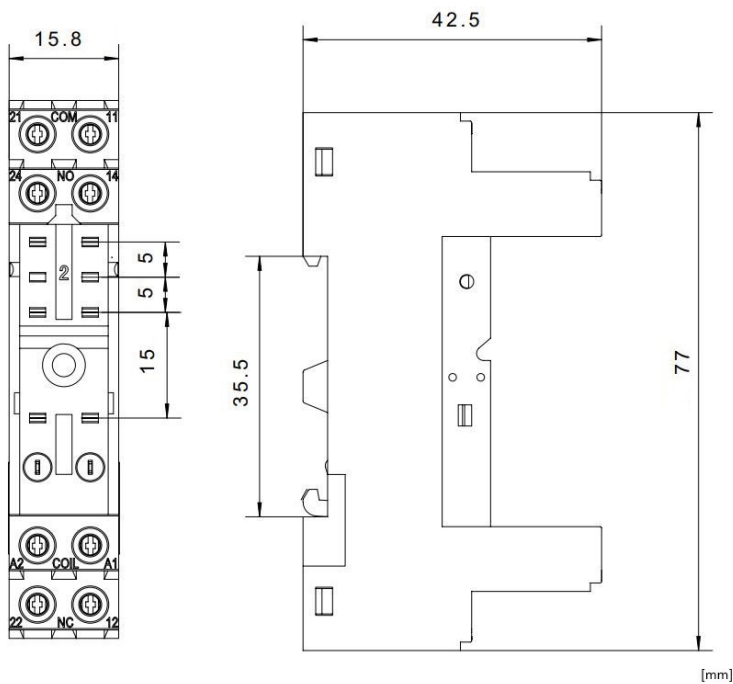

Article Table

DESCRIPTION	Order No.
Socket with screw terminals, 5mm, conventional arrangement for XT, RT2x, RT3x, RT4x relays	YRTS0725
Optional Accessories	
Retaining clip for RT2, RT3, RT4 relays	YRTS4000
S-Relay	
Protection diode module 6-250VDC for S-Relay socket	YRS13250
S-Relay	
LED+PD module green 6-24VDC A1+ for S-Relay socket	YRS12024
S-Relay	
LED module green 110-240VAC for S-Relay socket	YRS11730
S-Relay	
RC-Network module 6-24VAC for S-Relay socket	YRS14524
S-Relay	
RC-Network module 110-240VAC for S-Relay socket	YRS14730
S-Relay	
Marking tag for YRXT and YRTS socket	YRXT2000
S-Relay	