



Cuttable terminal, wire protection

RAL: 9010

Business data

Article number	<u>1817.0</u>
Article name	EKB 1,5/12 DS
GTIN (EAN)	4044211119294
Packaging unit	10
Quantity unit	PC
Unit of weight	G
Customs number	85369010
Country of origin	EU

Technical data

Dimensions

Width	18 mm
Height	14 mm
Pitch	8 mm

Ratings

Rated voltage	450 V
Rated cross-section	1.5 mm ²
Rated impulse voltage	2 kV
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Connections	24
Number of terminals per pole	2
No. of poles	12
Wire cross-section single core (rigid)/stranded, max.	2.5 mm ²
Wire cross-section stranded, max.	1.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Screw head	Slotted
Screw threading	M 2,6

Further technical data

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	100 °C
Mounting type	Mounting face


Approvals

VDE approval

VDE approval granted	yes
VDE rated voltage	450 V

Media

M2.6

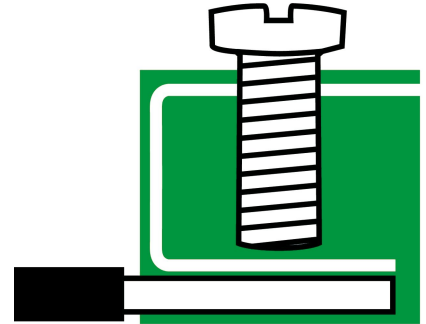

Accessories

Screwdriver
