

SX82



TYPICAL APPLICATIONS	Coffee machines, refrigerators, ironing steam generators, medical appliances, vacuum cleaners, power inlet
FUNCTIONS	<ul style="list-style-type: none"> ■ SPST, illuminated or not ■ DPST, momentary or not ■ DPST, illuminated or not ■ DPDT
CYCLE No.	50.000
CUT OUT	30x22 mm
AMBIENT TEMPERATURE	125 °C
GWT	850 °C
GWT NO FLAME (<2 sec)	750 °C on demand





DRAWING




TERMINAL




WATERPROOF CAP

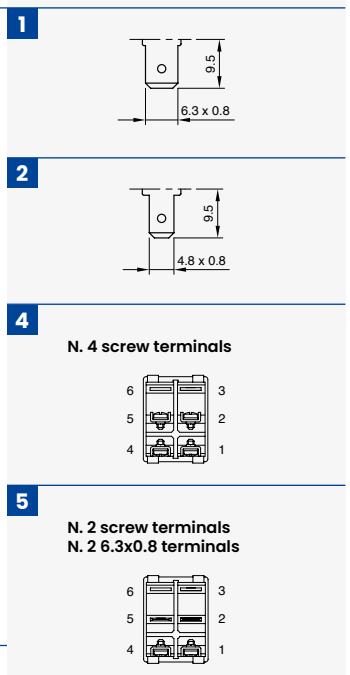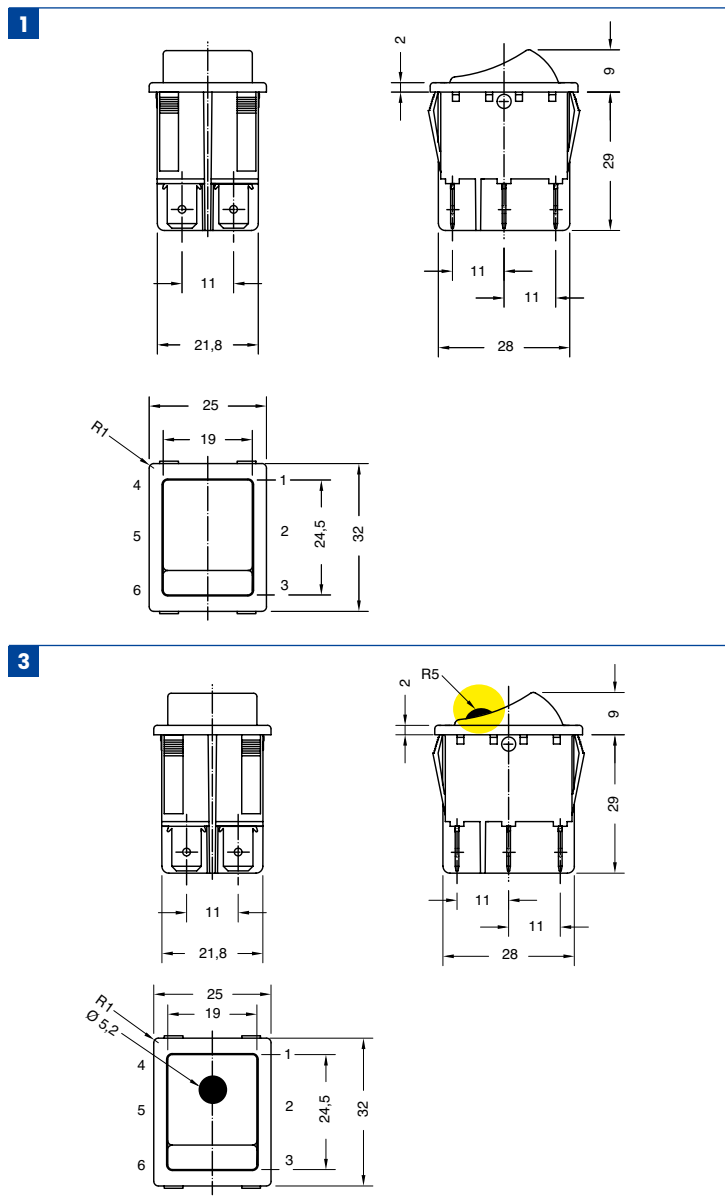

P (1 + waterproof cap mounted) **Q** (3 + waterproof cap mounted)

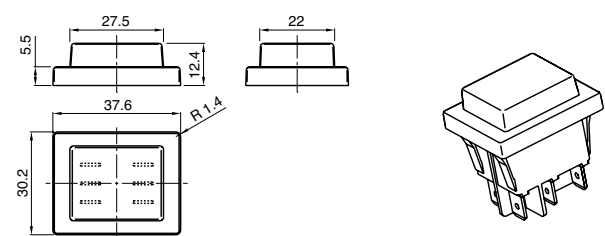



		Z	Y	X
STANDARD	PLASTIC	0,7 ... 3,5	22,0 ±0,1	30,0 ^{+0,2} / ₀
WATERPROOF CAP VERSION	METAL	0,7 ... 2,5	22,0 ±0,1	30,2 ^{+0,2} / ₀

S X 8 2 0 0 0

DRAWING TERMINAL FUNCTION RATING BODY COLOUR ROCKER COLOUR MARKING COLOUR MARKING LENS COLOUR

FUNCTION

1 Terminal 1 - 2

2

7 Terminal 1

8

L Terminal 1

W Terminal 1

RATING

8 Function 1 - 2

20 (2) A / 250 VAC*
16 (8) A / 250 VAC
10 (6) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

20 A GP / 125 VAC
16 A GP / 250 VAC
3/4 HP - 125 / 250 VAC
T105/55 °C
UL 61058-1

Function 7 - L

16 (6) A / 250 VAC
10 (4) A / 400 VAC
10 (4) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

20 A GP / 125 VAC
16 A GP / 250 VAC
3/4 HP - 125 / 250 VAC
T105/55 °C
UL 61058-1

Function 8 - W

20 (2) A / 250 VAC*
16 (8) A / 250 VAC
10 (6) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

20 A GP / 125 VAC
16 A GP / 250 VAC
3/4 HP - 125 / 250 VAC
T105/55 °C
UL 61058-1

Function 8 - W

20 (2) A / 250 VAC*
16 (8) A / 250 VAC
10 (6) A / 250 VAC - 5E4
T125/55 °C
EN 61058-1

16 A GP / 250 VAC
3/4 HP - 250 VAC
T105/55 °C
UL 61058-1

* Not available with terminal 2

BODY COLOUR

1 black

2 white

X custom

ROCKER COLOUR

1 black

2 white

9 red

ILLUMINATED ✨

G red

H orange

E green

L white

F custom

X custom

MARKING COLOUR

0 none

1 black

2 white

X custom

MARKING

0

1

2

6

C

D

N

X

LENS COLOUR

0 none

ILLUMINATED ✨

G red

H orange

E green

X custom