



## HMIs and Industrial PCs

Design, quality, and service that is ready for the future

# HMI and industrial PCs

Human-machine interfaces (HMIs) and industrial personal computers (IPCs) are essential for the efficient operation and monitoring of systems and machines. From PCs installed directly on the machine for field operation to complex visualization concepts for extensive automation systems – you will find the right solution for your application within the Phoenix Contact product portfolio.



## HMI – efficient touch panels and web panels

Efficient automation requires the right visualization. Our touch panels with integrated Visu+ runtime and web panels with open browsers for HTML5 applications simplify the operation and monitoring of your automation solution. Benefit from intuitive user guidance and a high level of efficiency. We have the right HMI that will be the ideal user interface for your application.



## Box PCs – compact solutions for machine-oriented data processing

Our compact box PCs are designed for a wide range of automation tasks – from simple data acquisition to complex IoT and edge applications. With DIN rail or wall mounting, you can benefit from a particularly robust and space-saving design. Due to their scalable performance and the wide range of interfaces, our embedded PCs provide the appropriate IPC solution for practically every industry and application.




## Rackmount PCs – powerful solutions for demanding applications

Our rackmount PCs provide you with maximum system performance for the acquisition and processing of large volumes of data in industrial automation or machine learning for machine building and systems manufacturing. The rackmount computers conform to the universal 19-inch standard, with the flexibility to extend according to your application. Benefit from the high performance of these systems.

## Software for visualization

Whether in the central control room, in production, or directly on the machine, efficient automation requires the right visualization. Whatever your visualization task, we have the right software. Benefit from our extensive portfolio covering all aspects of operation and monitoring for your HMIs and IPCs.

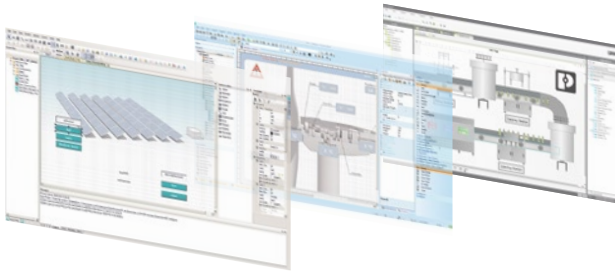

## Contents

### HMIs

HMIs with open web browser	8
HMIs with Visu+ software	12

Industrial PCs	16
Box PCs	18
Rackmount PCs	24
Panel PCs	26
Stand-alone IP65-protected panel PCs	30
Hygienic industrial panels in stainless steel	32
Rugged all-around protected panels	34
Industrial touch monitors	36
Edge programmable computers	38

Industrial PCs for Ex areas	40
-----------------------------	----



### Panel PCs – modern solutions for operation and monitoring

Benefit from the advantages of our scalable and modern panel PCs for acquiring, processing, measuring, controlling, and visualizing your data. Touch panel PCs are the business card for every visualization solution. Available in flush-mounted or support-arm versions with IP65 or IP69K protection, industrial panel PCs impress with their robustness, performance, and state-of-the-art touch technology.

### Touch monitors – a robust front end for machine operation

For operating concepts where the industrial PC and industrial monitor are physically separated, our functional multi-touch monitors are the ideal solution. These robust devices with industrial touchscreens can be used directly on the machine. Numerous graphical interfaces enable easy connection to any PC.

# HMI and industrial PCs

## Design, quality, and service that is ready for the future

Are you looking for intelligent solutions for the operation and monitoring of machines and systems? Phoenix Contact offers a wide range of robust and reliable technology, from HMIs and powerful industrial PCs to custom solutions for special industrial requirements. We will provide you with an impressive package that delivers exceptional design, quality, and service.

### Design

Our HMIs and industrial PCs offer an attractive and intuitive product design. Compact and functional, they can be incorporated seamlessly into your system or machine design and are the perfect interface between user and machine.

### Quality

Made by Phoenix Contact – you can rely on our promise of quality. Our focus is to provide durable components that meet industry standards and stringent requirements. Our HMI and IPC portfolio is produced from high-quality and reliable components and always offers the best performance.

### Service


Benefit from our comprehensive service. From product selection to retrofitting your existing industrial systems, we develop the perfect concept for individual automation tasks with our customers.

### Ready for the future – open automation

Our HMI/IPC portfolio is ready for open automation solutions. The runtime of our edge PCs feature all the advantages of the PLCnext Technology ecosystem. Benefit from simple integration into an existing IT infrastructure through centralizing data in the cloud, closing the gap between the IT and OT worlds.

## Everything from a single source

From customized solutions to engineering support, we can help you to design a better automation system. Services range from pre-loaded software images to clean-sheet designs based on your requirements.

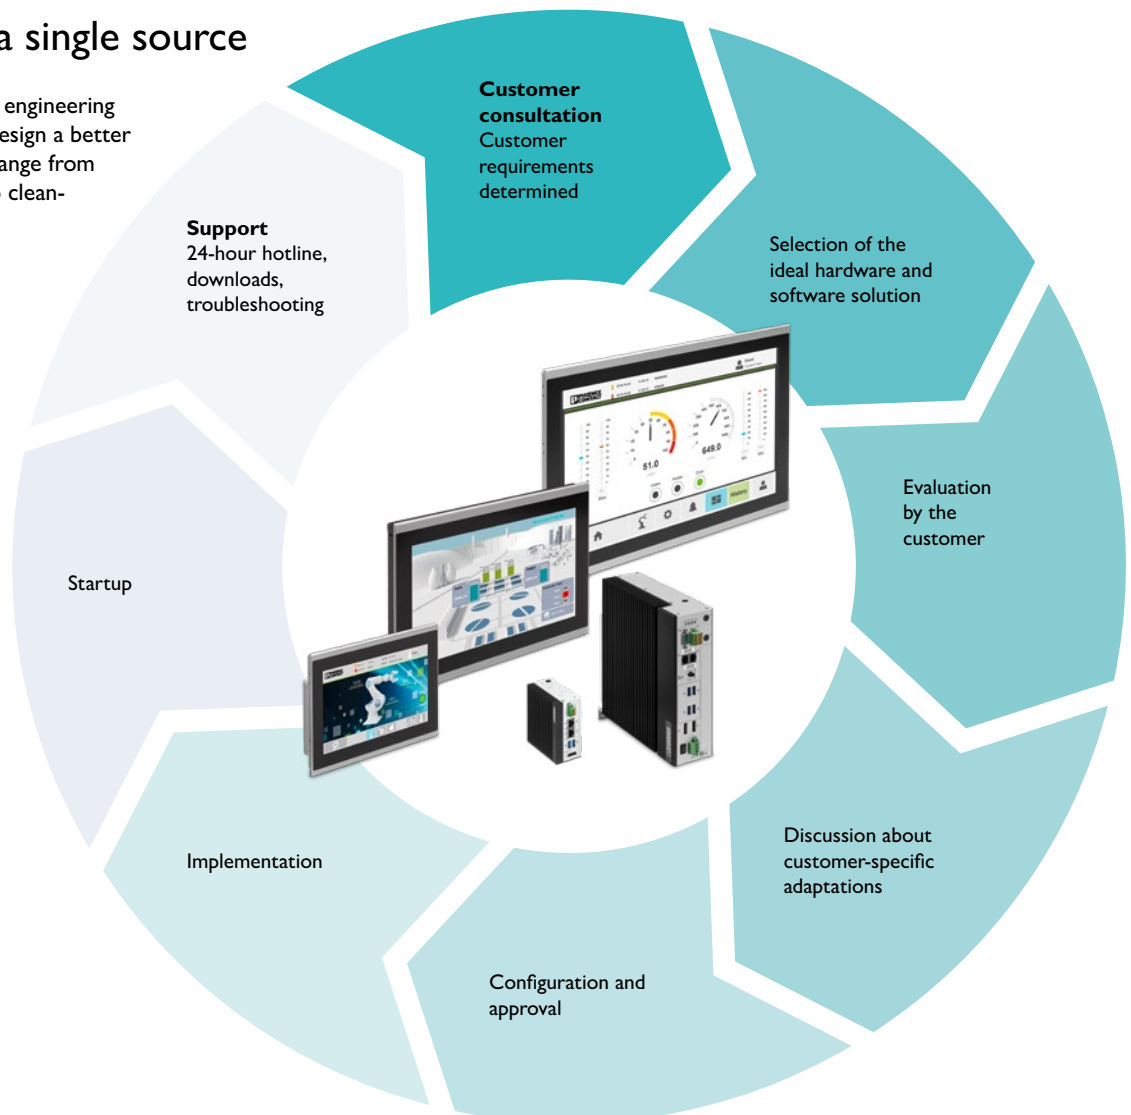



## Our added value



### Multi-touch

There is a sensor pattern for projective capacitive touchscreen (PCAP). Changes in the electrical field are evaluated individually in each part of the pattern. This enables multi-touch functions and gesture control.



### Cost savings

Phoenix Contact offers cost-effective alternatives for operating and monitoring tasks.



### Enhanced touch capabilities

Latest touchscreen technology allows the operation of PCAP multi-touch interfaces with gloves. These touchscreens are also permissible in moist and wet locations.



### Fanless

Carefully selected components and a sophisticated passive cooling system enable a completely fanless operation. This increases device reliability, decreases dust contamination, and reduces noise.



### Remote access

The Visu+ mobile visualization app or the HTML5 web server integrated in the runtime enable convenient use of your visualization on a smartphone or tablet. SCADA functions such as trend display or alarm handling are also available on mobile end devices.



### SSL encryption

Secure communication with SSL-encrypted data transmission.



### Hardware security

Implement a module to increase the security of a PC on a hardware level. The module is used by software to encrypt the system and protect intellectual property and data.



### Extended temperature range

This refers to the ambient temperature in which the device will be permanently operated. Special components are often used for systems that are designated for extended temperature ranges.



### High ingress protection

Protected from dust, water, and other particles.



### Service-friendly

If maintenance is required, certain components of the device are accessible without the need for tools.



### Cockpit

Administration and configuration made easy. Everything required for setup and operation is consolidated at a single location.



### HTML5

The web standard, providing all options for HMI projects in combination with CSS and JavaScript.

## What is it?

### Phoenix Contact eXtended Reality

#### Using PXR

Scan QR codes located throughout this document with your mobile device camera or QR code reader to launch **PXR**.


Interact with the 3D model of the product. Click the “View product list” button to see listings or “View in my space” to project the model into your area (AR experience).

**Scan the QR code on the right to get started!**



# Selection guide for HMIs

Our human-machine interfaces provide user-friendly visualization for automation systems in a multitude of industries and applications.

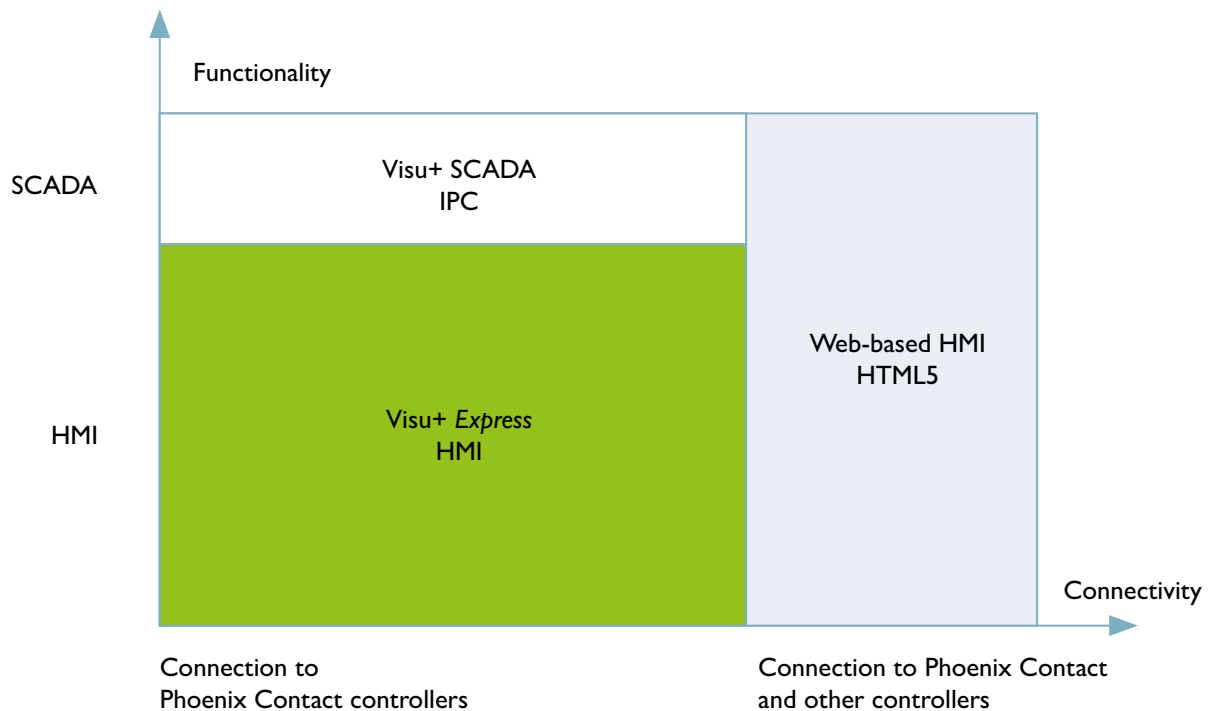

## Visu+ Express

Free visualization software for connection to all well-known controller manufacturers with a comprehensive range of visualization tools.

## Visu+

Powerful visualization software for complex visualization tasks and comprehensive SCADA functions for connection to all well-known controller manufacturers.

## HTML5

HMI panels with integrated embedded browser in kiosk/full-screen mode with optimum HTML5 support enable operation and monitoring options for the high-performance display of web-based content.

## Step 1: Visualization as the basis for selecting an HMI

The requirements for the user interface, functionality, and system coupling determine which visualization system is appropriate and which particular HMI type should be selected.

- The user interface aspect refers to the graphical options for designing an interface
- The functionality aspect indicates the software's operation and monitoring functions
- The system coupling aspect refers to communication and integration in control systems

## Step 2: Assess the resource requirements based on the scope of the application

It is crucial to match each application with the right HMI. Response and display refresh times can vary significantly with the number of graphics and their overall complexity. HMI applications can range from simple push-button replacers to graphic-rich user

interfaces utilizing advanced alarming, trending, or recipe-handling features.

## Step 3: Select the right device

Based on their features (CPU capacity, display resolution, and memory capacity) as well as their suitability for different

applications, the individual device families can be divided into three classes: basic (BWP 2000, BTP 2000), standard (WVP 6000

and TP 6000), and high-end applications (IPC). Select the right operator panel to meet your application needs.

			HMI for HTML5		HMI for Visu+		Industrial PC
			BWP 2000	WP 6000	BTP 2000	TP 6000	IPC
Page			10	11	14	15	16
Visualization		Runtime on HMI panel			●	●	●
		Web-based	●	●			●
Connection to control systems	Phoenix Contact	AXC or RFC controller running PLCnext	●	●	●	●	●
		ILC, AXC, or RFC controller running PCWorx	●	●	●	●	●
		Emalytics View & Automation, Niagara, Dglux		○			●
		PLC logic			●	●	
	Other	OPC UA			●	●	●
		Third-party manufacturer	●	●	●	●	●
		Multi-driver PLC communication			○	●	●
		CODESYS	○	●			●
Remote Data Access (RDA)			○	●	○	●	●
Touch technology/ interface		Resistive touch (polyester)	●		●		●
		PCAP touch		●		●	●
Hardware		Metal housing		●		●	●
		Plastic housing	●		●		
Environmental influences and approvals		Expanded temperature range					●
		Displays can be read in direct sunlight					●
		UL (Ordinary/Hazardous location)	●/●	●/–	●/●	●/+	●/●
		ATEX Zone 2 and IECEx Zone 2					●
		Value / Performance	●/○	○/●	●/○	○/●	●/●

- \* With browser or visualization software installed  
 ● Best option  
 ○ Limited / alternative option  
 + Planned / future implementation  
 – Not available

# HMIs with open web browsers for HTML5-based visualizations

HTML5 web technology enhances control and visualization systems by allowing easy data exchange between the HMI and any web server. The HTML5-based web panel simply requires configuration of the web server's IP address, and its contents can be displayed on both our competitive BWP 2000 and WP 6000 series HMIs. This makes these web panels the perfect fit for PLCnext-based control systems or any other device with a built-in web server.

## Your advantages

- ✓ Open web standards ensure/guarantee compatibility with any web server
- ✓ No runtime license costs
- ✓ Independent visualization where you can program your JavaScript applications
- ✓ Time and location independence – interact with your machine remotely via smartphone or PC




## PLCnext Engineer

PLCnext Engineer software is optimized for the creation of modern visualization solutions. With respect to the technology, the visualization integrated into PLCnext Engineer is based on open standards such as HTML5 and JavaScript. No web skills are required, since the software offers numerous symbols and templates that can be individually extended.

- Programming and visualization for the new generation of Phoenix Contact controllers
- End-to-end engineering: Configuration, programming, visualization, and diagnostics
- Comprehensive symbol libraries can be extended and reused as often as required
- Free download and licensed add-ins available at [phoenixcontact.com](http://phoenixcontact.com)

Further information on controllers compatible with PLCnext Engineer available at:

 **Web code: #2310**

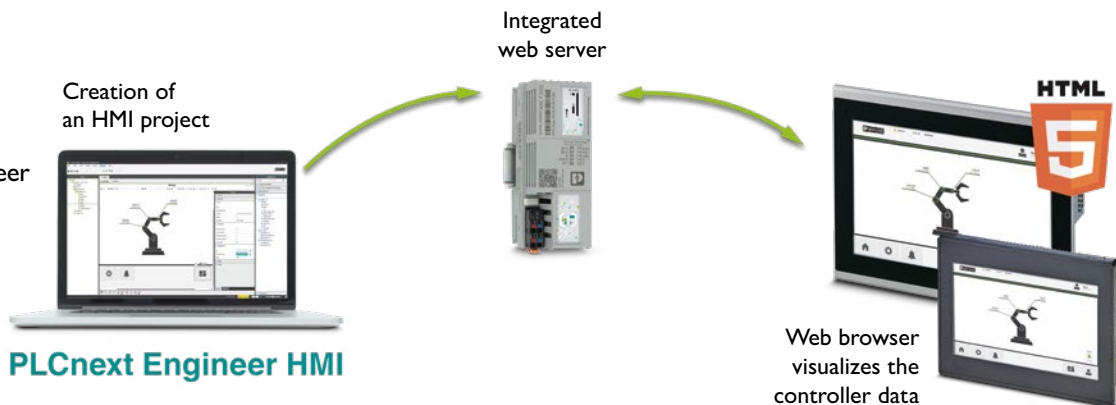



# HTML5 web panels with resistive touch

## General technical data

- Display type: TFT
- Processor: Arm® 9 i.MX6DL DualLite, 454 MHz (dual-core)
- Memory: 1 GB RAM, 4 GB eMMC Flash
- Interfaces: 1 x Ethernet (10/100 Mbps), 1 x USB Host 2.0
- Housing: plastic
- Degree of protection: IP66 (front), IP20 (back)
- Power supply: 24 V DC ±15%
- Installation type: portrait (planned)/landscape
- Mounting type: front installation
- Approvals: UL/cUL, Class I, Div 2

## Your advantages

- ✓ HTML5-compatible browser integrated in all devices
- ✓ Easy startup: Just enter the IP address and URL
- ✓ No security updates required for Java or Flash plug-ins
- ✓ Energy-efficient LED backlight
- ✓ Best price/performance ratio



## Web panels with open browsers for simple HTML5 applications



Designation	BWP 2043W	BWP 2070W	BWP 2102W
Item number	1060549	1060632	1060630
Display size (cm / in)	10.92 / 4.3"	17.78 / 7"	25.9 / 10.2"
Touch technology	Analog resistive (polyester)		
Colors	16.7 million		
Resolution, W x H (pixels)	480 x 272 (WQVGA)	800 x 480 (WVGA)	1024 x 600 (WSVGA)
Brightness (cd/m)	400	350	
Backlight MTBF (h)	20,000	25,000	
Viewing angle, left / right / top / bottom (°)	70 / 70 / 50 / 70		65 / 65 / 45 / 65
Front plate dimensions, W x H x D (mm)	120 x 89 x 5	186 x 138 x 5	268 x 190 x 5
Mounting cutout, W x H (mm)	111 x 80	175 x 127	256 x 178
Installation depth (mm)	31.5	31	33
Weight (kg)	0.2	0.4	0.9
Power consumption (W)	5.3	6	8.4
Operating temperature	0°C to +50°C (-20°...60°C for non-UL)		
Storage temperature	-20°C to +85°C		
Relative humidity	10% to 90%, non-condensing		

# HTML5 web panels with PCAP multi-touch

## General technical data

- Display type: TFT
- Processor: Arm® Cortex®-A9, 1.6 GHz, Quad-core
- Memory: 4 GB RAM, 8 GB eMMC Flash
- Interfaces: 1 x Ethernet (10/100/1000 Mbps), 2 x USB Host 2.0,
- 1 x USB-C; 1 x microSD
- Operating system: Linux Yocto
- Housing: aluminum/sheet steel, zinc-plated
- Degree of protection: IP66 (front), IP20 (back)
- Power supply: 24 V DC ±20%
- Installation type: portrait/landscape
- Mounting type: front installation
- Approvals: UL/cUL

## Your advantages

- ✓ Flexible with open web standards and a choice of HTML5 web servers and visualization software
- ✓ No security updates required for Java or Flash plug-ins
- ✓ Ideal for use with PLCnext Engineer or CODESYS V3
- ✓ Secure communication with SSL-encrypted data transmission



## Web panels with open browser for HTML5 applications



Designation	WP 6070-WVPS	WP 6101-WXPS	WP 6121-WXPS	WP 6156-WHPS	WP 6185-WHPS	WP 6215-WHPS
Item number	1290800	1290801	1290802	1290803	1290807	1290809
Display size (cm / in)	17.78 / 7"	25.65 / 10.1"	30.73 / 12.1"	39.6 / 15.6"	47 / 18.5"	54.6 / 21.5"
Touch technology	Projective capacitive (PCAP)					
Colors	16.7 million					
Resolution, W x H (pixels)	800 x 480 (WVGA)	1280 x 800 (WXGA)		1920 x 1080 (FHD)		
Brightness (cd/m²)	500		400	450	350	400
Backlight MTBF (h)	50,000					
Viewing angle left / right / top / bottom in (°)	89 / 89 / 89 / 89	85 / 85 / 85 / 85	88 / 88 / 88 / 88	85 / 85 / 85 / 85	89 / 89 / 89 / 89	
Front plate dimensions, W x H x D (mm)	202 x 146 x 6.9	263 x 200 x 6.9	302 x 229 x 6.9	398 x 273 x 6.9	465 x 310 x 6.9	532 x 346 x 6.9
Mounting cutout, W x H (mm)	195 x 139	252 x 189	292 x 219	388 x 263	455 x 300	522 x 336
Installation depth (mm)	51					
Weight (kg)	1.3	2.1	2.5	4.2	4.8	6.4
Power consumption (W)	14.7	19.0	21.5	30.5	32.2	32.9
Operating temperature	-20°C to +50°C			0°C to +50°C		
Storage temperature	-25°C to +85°C			-20°C to +60°C		
Relative humidity	20% to 85%, non-condensing			10% to 90%, non-condensing		

# HMI with Visu+ software

## Scalable for demanding applications

Visu+ is Phoenix Contact's visualization software, which allows you to create graphic-rich user interfaces for industrial applications. The free Express version is designed for our BTP 2000 and TP 6000 HMI series, as well as select IPCs. Visu+ is available with different feature sets, either configured to work as a high-end HMI when bundled with our industrial PCs, or as a SCADA system with the stand-alone Visu+ software license options.







## Visu+ / Visu+ Express

Visualizations with SCADA functions deliver impressive scalability and versatility. Monitor and operate complex machines, systems, or automated processes with Visu+.

- Create sophisticated graphical user interfaces
- Native communication drivers provide direct communication with all relevant PLC and device manufacturers in the industrial marketplace
- Remote data access via Visu+ mobile app and HTML5 web client
- The license for the runtime environment is already included in the price of HMI devices
- Visu+ is also available as a configuration option for our industrial PCs to create PC-based HMI solutions


### Visu+ Express:

- Free Express version
- Functionality optimized for typical HMI requirements

### Visu+:

- SCADA scope of functions
- Supports all touch panels and IPCs

Try the free Visu+ Express development license today. Visit the Phoenix Contact website and search for part number [2402774](#).

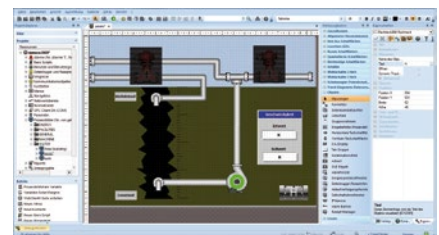

**VISU+**  
SCADA Visualization



# Touch panels with resistive touch

## General technical data

- Display type: TFT
- Processor: Arm® Cortex® A7, 700 MHz
- Memory: 512 MB RAM, 4 GB eMMC
- Interfaces: 1 x Ethernet (10/100 MBit/s), 1 x USB Host 2.0, 1 x µUSB device, 2 x COM (RS-232/422/485), 1 x SD card slot
- Operating system: Windows® Embedded Compact 7
- Housing: plastic
- Degree of protection: IP66 (front), IP20 (back)
- Power supply: 24 V DC ±15%
- Mounting type: front installation
- Approvals: CE, UL/cUL, Class I, Div 2

## Your advantages

- ✓ Visu+ runtime included in all devices
- ✓ Native communication drivers for direct communication to all relevant PLC and device manufacturers in the industrial marketplace
- ✓ Developed for simple applications with an attractive price/performance ratio
- ✓ Remote data access via Visu+ mobile app and HTML5 web client



BTP 2000

## Visu+ Touch panels with resistive touch



Designation	BTP 2043W	BTP 2070W	BTP 2102W
Item number	1050387	1046666	1046667
Display size (cm / in.)	10.92 / 4.3"	17.78 / 7"	25.9 / 10.2"
Touch technology	Analog resistive (polyester)		
Colors	262,144		
Resolution, W x H (pixels)	480 x 272 (WQVGA)	800 x 480 (WVGA)	
Brightness (cd/m²)	400	350	400
Backlight MTBF (h)	50,000		
Viewing angle, horizontal / vertical (°)	70 / 70 / 50 / 70		65 / 65 / 45 / 65
Front plate dimensions, W x H x D (mm)	120 x 89 x 5	186 x 138 x 5	268 x 190 x 5
Mounting cutout, W x H (mm)	111 x 80	175 x 127	256 x 178
Installation depth (mm)	31.5	31	33
Weight (kg)	0.2	0.4	0.9
Power consumption (W)	4	9	7
Operating temperature	0°C to +50°C (-20°...60°C for non-UL)		
Storage temperature	-20°C to +85°C		
Relative humidity	10% to 90%, non-condensing		



# Touch panels with PCAP multi-touch

## General technical data

- Display type: TFT
- Processor: Arm® Cortex®-A9, i.MX6, 800 MHz (4 cores)
- Memory: 8 GB eMMC, 1 GB RAM
- Interfaces: 1 x Ethernet (10/100/1000 Mbps), RJ45 Intel, 2 x USB 2.0, 1 x COM (RS-232/422/485), 1 x MicroSD
- Operating system: Windows® Embedded Compact 7
- Housing: aluminum/sheet steel
- Degree of protection: IP66 (front), IP20 (back)
- Power supply: 24 V DC ±20%
- Mounting type: front installation, VESA 100
- Approvals: CE, UL/cUL

## Your advantages

- ✓ Robust and sturdy with glass front suitable for industrial use
- ✓ Visu+ runtime included in all devices
- ✓ Native communication drivers for direct communication to all relevant PLC and device manufacturers in the industrial marketplace
- ✓ Powerful quad-core processor with fast response and display refresh times
- ✓ Remote data access via Visu+ mobile app and HTML5 web client



## Visu+ Touch panels with PCAP multi-touch



Designation	TP 6070-WVPS	TP 6101-WXPS	TP 6121-WXPS	TP 6156-WHPS	TP 6185-WHPS	TP 6215-WHPS
Item number	1189629	1190417	1190420	1190421	1190423	1190424
Display size (cm / in.)	17.78 / 7"	25.65 / 10.1"	30.73 / 12.1"	39.6 / 15.6"	47 / 18.5"	54.6 / 21.5"
Touch technology	Protective capacitive (PCAP)					
Colors	16.7 million					
Resolution, W x H (pixels)	800 x 480 (WVGA)	1280 x 800 (WXGA)		1920 x 1080 (FHD)		
Brightness (cd/m²)	500		400	450	350	400
Backlight MTBF (h)	50,000					
Viewing angle, horizontal / vertical (°)	89 / 89 / 89 / 89	85 / 85 / 85 / 85	88 / 88 / 88 / 88	85 / 85 / 85 / 85	89 / 89 / 89 / 89	
Front plate dimensions, W x H x D (mm)	202 x 146 x 6.9	263 x 200 x 6.9	302 x 229 x 6.9	398 x 273 x 6.9	465 x 310 x 6.9	532 x 346 x 6.9
Mounting cutout, W x H (mm)	195 x 139	252 x 189	292 x 219	388 x 263	455 x 300	522 x 336
Installation depth (mm)	51					
Weight (kg)	1.3	2.1	2.5	1.7	4	5.5
Power consumption (W)	14.71	19.01	21.53	16.8	24	28.8
Operating temperature	-20°C to +50°C			0°C to +50°C		
Storage temperature	-25°C to +85°C			-20°C to +60°C		
Relative humidity	20% to 85%, non-condensing			10% to 90%, non-condensing		

# Industrial PCs

## The right system for every application

As the interface between human and machine or as a central system controller, industrial PCs are an essential component in industrial applications. In addition to box PCs, the Phoenix Contact portfolio also includes powerful panel PCs as well as devices for special industrial requirements. Enjoy the benefits of a robust and configurable solution for collecting, processing, measuring, controlling, and visualizing your data.



### Box PCs

- The right performance for every application with Intel Atom® through Intel® Core™ processors
- Passive cooling and no moving parts
- Access to all important components without the use of tools
- Easy connection to existing I/O devices via serial interfaces

For further information, refer to pages 18 to 23



### Touch monitors

- Display sizes ranging from 15.6" to 21.5" in 16:9 format
- PCAP multi-touch functionality
- High shock resistance and electromagnetic protection
- Easy VESA 100 mounting

For further information, refer to pages 36 to 37

## Programmable edge computer

- Connectivity from sensor to cloud
- Based on PLCnext Technology
- Integrated programming tools
- Bridge between IT and OT

For additional information, refer to pages 40-41



## Panel PCs

- The right performance for every application with Intel® Atom™ through Intel® Core™ processors
- Display sizes ranging from 7" to 21.5" in 4:3 or 16:9 format
- Analog resistive or PCAP touch
- Passive cooling and no moving parts

For further information, refer to pages 26 to 35



## Industrial PCs for hazardous locations

- Display sizes ranging from 15.6" to 21.5" in 16:9 wide-screen format
- Extended temperature range
- Designed and certified to operate in explosive atmospheres

For further information, refer to pages 42 to 43

# Box PCs

Box PCs are designed to work in a wide variety of automation tasks, from simple data collection to high-speed control systems. Their rugged design, various mounting options, and scalable performance provide the right IPC solution for virtually any industry or application.



# Box PCs

## General technical data

- Operating systems (configurable): Windows® 10 IoT Enterprise 2021
- Housing: sheet steel/aluminum
- Degree of protection: IP30
- Power supply: 24 V DC ±20%
- Mounting type: wall or DIN rail mounting
- Approvals: UL/cUL, Class I, Div 2


## Your advantages

- ✓ Passive cooling and no moving parts
- ✓ Service-friendly with easily accessible components
- ✓ Individually configurable
- ✓ Windows® 11 ready
- ✓ Secure hardware option, equipped with TPM 2.0



## VL3 box PCs



				
Designation	VL3 BPC			
Item number	1376797			
Processor	Intel® Celeron® 6305E 1.8 GHz (dual-core)	Intel® Core™ i3-1115G4E 3.0 GHz (dual-core)	Intel® Core™ i5-1145G7E 2.6 GHz (quad-core)	Intel® Core™ i7-1185G7E 2.8 GHz (quad-core)
Cooling	Passive			
RAM (configurable)	Max. 16 GB DDR4	Max. 64 GB DDR4		
Data memory (configurable)	2 x m.2 SSD			
RAID support (configurable)	0/1			
Ethernet interfaces	2 x (10/100/1000 Mbps), RJ45, Intel® i225LM; i211AT			
USB	4 x USB 3.1			
Serial interfaces	1 x COM (RS-232/422/485) Optional: Wireless LAN Optional: Extended Function modules			
Hardware security	Trusted Platform Module (TPM 2.0)			
Video output	2 x DisplayPort (DP++)			
Graphics processor	Intel® HD Graphics	Intel® HD Graphics 4400		
PCI/PCIe slots (configurable)	1 x full size PCIe			
Dimensions, W x H x D (mm)	70 x 225 x 230 mm (base system) // 109 x 225 x 230 mm (with PCIe)			
Weight (kg)	3.7 (4.2 with PCIe expansion)			3.8 (4.3 with PCI expansion)
Power consumption1 (W)¹	97	97	112	120
Operating temperature	-20°C to +50°C			
Storage temperature	-40°C to +70°C			
Relative humidity	10% to 95%, non-condensing			

<sup>1</sup> Power consumption value represents maximum power consumption without a PCIe interface. Actual system power consumption depends on system loading. See user manual for details.



# Compromising between size, performance, and connectivity is no longer necessary

The palm-sized embedded VL3 UPC is the perfect fit for IIoT applications such as edge computing or decentralized data collection and processing. The passive cooling design, use of M.2 SSD mass storage devices, and expansion options in the robust metal housing allow for 24/7 operation in demanding industrial environments.



# Compact box PCs

## General technical data



- Graphics processor: Intel® UHD Graphics for 10th gen. processors
- Video output: 1 x DisplayPort (DP++)
- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel® i225
- USB: 2 x USB 3.1 gen. 1
- Hardware security: Trusted Platform Module (TPM 2.0)
- Operating system: Windows® 10 IoT, Linux
- Operating temperature<sup>2</sup>: -20°C to +60°C
- Storage temperature: -40°C to +85°C
- Relative humidity: 10% to 95%, non-condensing
- Housing: sheet steel/aluminum
- Degree of protection: IP30
- Power supply: 24 V DC ± 20%
- Mounting: DIN rail (wall mount optional)
- Approvals: CE, UL/cUL

## Your advantages

- ✓ A modern hardware platform that is scalable in performance, memory, and storage
- ✓ Long-term available Elkhart Lake processors
- ✓ Best-in-class connectivity options enable communication to a multitude of networks and peripherals simultaneously
- ✓ Compact form factor for installations into small enclosures



## VL3 UPC series box PCs

				
Designation	VL3 UPC 1110	VL3 UPC 1320	VL3 UPC 2430	VL3 UPC
Item number	1433148	1433147	1433152	1459506
Processor	Intel® Atom® x6211E 1.3 GHz (2 core)		Intel® Atom® x6413E 1.5 GHz (2 core)	Configurable
RAM	2 GB LPDDR4	8 GB LPDDR4	16 GB LPDDR4	Configurable
Data memory	30 GB NVMe SSD	60 GB NVMe SSD	120 GB NVMe SSD	Configurable
Optional Serial interfaces	N/A			2 x COM (RS-232/422/485)
Optional Wireless LAN	N/A			1 x WLAN (a, b, g, n)
Dimensions, W x H x D (mm)	100 x 100 x 50			
Expansion option 1	N/A			2 x 10/100/1000, RJ45 (i225), 1 x M.2 2242 B-key (storage)
Expansion option 2	N/A			1 x 4G / LTE + microSIM, 1 x M.2 2242 B-key (storage)
Dimensions with expansion option, W x H x D (mm)	N/A			100 x 100 x 80
Weight (kg)	0.70			0.70 / 0.96
Power consumption <sup>1</sup> (W) <sup>1</sup>	19.7			Depends on configuration

<sup>1</sup> Power consumption value represents typical power consumption. Actual system power consumption depends on system loading. See user manual for details.

<sup>2</sup> Temperatures listed require a minimum of 0.5 m/s airflow.

# Box PCs

## General technical data

- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel i210-IT
- Operating systems (configurable):  
Windows® 7 and Windows® 10 IoT Enterprise
- Operating temperature: 0°C to +50°C
- Storage temperature: -40°C to +70°C
- Relative humidity: 10% to 90%, non-condensing
- Housing: sheet steel/aluminum
- Degree of protection: IP20
- Power supply: 24 V DC ±20%
- Mounting type: wall mount and DIN rail (1100 and 2100 only)
- Approvals: UL/cUL

## Your advantages

- ✓ Passive cooling and no moving parts
- ✓ Compact design in a high-quality metal housing
- ✓ Individually configurable
- ✓ 6th generation Intel processor (Intel's 15-year support roadmap)
- ✓ Windows® 10 IoT and Windows® 7 support
- ✓ Support for 2.5" HDD / SSD SATA drive

## BL2 series box PCs



Designation	BL2 BPC 1100	BL2 BPC 2100	BL2 BPC 3100	BL2 BPC 7100	BL2 BPC 9100
Item number	1105772	1105773	1105776	1105777	1105778
Processor	Intel® Celeron® N3350 1.1/2.4 GHz (dual-core)	Intel® Pentium® N4200 1.1/2.5 GHz (quad-core)	Intel® Core™ i3-6100U 2.3 GHz (dual-core)	Intel® Core™ i5-6300U 2.4/3.0 GHz (dual-core)	Intel® Core™ i7-6600U 2.6/3.4 GHz (dual-core)
Cooling	Passive				
RAM (configurable)	max. 8 GB DDR3		max. 16 GB DDR3		
Data memory (configurable)	M.2 SSD	M.2 SSD, 2.5" SSD or HDD			
Number of slots	-				
USB	2 x USB 2.0, 2 x USB 3.0				
Serial interfaces	1 x COM (RS-232/422/485), 2 x COM (RS-232)				
Video output	2 x DisplayPort (DP++)				
Graphics processor	Intel® HD Graphics 500	Intel® HD Graphics 505	Intel® HD Graphics 520	Intel® HD Graphics 630	Intel® HD Graphics 520
PCI/PCIe slots (configurable)	1 x Mini PCIe				
Dimensions, W x H x D (mm)	185 x 131 x 54		247 x 145 x 54		
Weight (kg)	1.2		2		
Power consumption (W) <sup>1</sup>	26.4	31.2	45.6	46.1	47.3

# Compact box PCs

## General technical data

- Graphics processor: Intel® HD Graphics 500
- Video output: 1 x DisplayPort (DP++)
- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel® i210
- USB: 2 x USB 3.0
- Operating system: Windows® 10 IoT, Linux
- Storage temperature: -40°C to +85°C
- Relative humidity: 5% to 95%, non-condensing
- Housing: sheet steel/aluminum
- Degree of protection: IP30
- Power supply: 12-30 V DC
- Mounting: DIN rail (wall mount optional)
- Approvals: CE, UL/cUL

More configurations available on [www.phoenixcontact.com](http://www.phoenixcontact.com)

## Your advantages

- ✓ Compact design fits into small cabinet boxes
- ✓ Efficient performance Intel CPUs
- ✓ High reliability with passive cooling and solid-state mass-storage media
- ✓ Secure hardware option, equipped with Trusted Platform Module
- ✓ Flexible mounting options to complement your application



## BL2 series box PCs



Designation – BL2 BPC...	1501S	1541S-4/64	1541S-4/64-W10	1501E	1501E-W	1501E-64-W10	1501E-64-W10-T	1501E-128-W10	1501E-128-W10-T
Item number	1130682	1272827	1272688	1141843	1141843	1158241	1158247	1158235	1158243
Processor: Intel® Celeron® N3350, 1.1 GHz (2 core)	●			●	●	●	●	●	●
Processor: Intel® Atom® E3940, 1.6 GHz (4 core)		●	●						
RAM	4 GB LPDDR4								
Onboard data storage (eMMC SSD)	32 GB	64 GB		32 GB					
Additional data storage (M.2 SSD)	N/A					64 GB		128 GB	
Serial interfaces	N/A			1 x COM (RS-232); 1 x COM (RS 232/422/485)					
Wireless LAN				●					
Windows 10 IOT			●			●	●	●	●
Hardware security	N/A	N/A	N/A	N/A	N/A	N/A	TPM 2.0	N/A	TPM 2.0
Dimensions, W x H x D (mm)	97 x 46 x 94			97 x 63 x 94					
Weight (kg)	0.614			0.746					
Power consumption (W) <sup>1</sup>	10.8			12.72					
Operating temperature <sup>2</sup>	-20 to 50°C	-40 to 70°C		-20 to 50°C					

<sup>1</sup> Power consumption value represents maximum power consumption. Actual system power consumption depends on system loading. See user manual for details.

<sup>2</sup> Temperatures listed require a minimum of 0.5 m/s airflow.



# Rackmount PCs

## For large, centralized automation installations

For the data collection and processing of large amounts of sensor data, extensive SCADA visualization and image processing are available with the powerful 19" rack-installed industrial PCs from Phoenix Contact. Offering advanced performance for demanding applications, the 19" rack form factor allows simple installation into controlled industrial environments.





# Industrial PCs for 19" racks



## General technical data

- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45
- Operating system (configurable): Windows® 10
- Power supply: 110 to 230 V AC
- Operating temperature: 0°C to +50°C
- Storage temperature: 0°C to +70°C
- Relative humidity: 5% to 95%, non-condensing
- Housing: powder-coated sheet metal
- Protection class: IP20
- Approvals: CE, UL/cUL

## Your advantages

- ✓ Fits perfectly into 19" racks
- ✓ Available in sizes 2U and 4U
- ✓ Mass-storage devices are mechanically protected and locked
- ✓ Easy serviceability with hot-swappable mass-storage devices
- ✓ Easily serviceable air filters



Rack IPCs		
		
Designation	BL Rackmount 2U	BL Rackmount 4U
Item number	2400063	2400064
Processor (configurable)	Intel® Core i3-9100TE, 2.2 GHz // Intel Core i7-9700TE 1.8 GHz	
Cooling	Active – forced air	
RAM configurable	8 GB to 64 GB DDR4	
Data memory (configurable)	Up to 4 TB 3.5" HDD or up to 480 GB 2.5" SSD per drive	
RAID level (configurable)	0/1	0/1/5
Number of slots for mass-storage devices	2	3
USB	2 x USB 2.0, 2 x USB 3.0	4 x USB 2.0, 2 x USB 3.0
Serial ports	1 x COM (RS-232), 1 x COM (RS-232/422/485)	
Video output	DVI-I	
Graphics processor	Intel® Graphics 630	
PCI/PCIe slots (configurable)	3 x PCI, 1 x PCIe x8, 1 x PCIe x16	8 x PCI, 3 x PCIe x1, 1 x PCIe x16
Mounting	Rackmount 2U	Rackmount 4U
Dimensions, W x H x D (mm)	482 x 89 x 429	482 x 177 x 461
Weight (kg)	13.5	14.5
Power consumption (W)	500	

# Panel PCs

Panel PCs are the front end of any high-end control or visualization task. The VL3 panel PCs provide a reliable user interface for a multitude of applications and industries requiring touchscreen operation and rugged design. Combined with the Visu+ software, you can design high-end, graphics-rich visualization systems.



# Panel PCs

## General technical data

- Display type: TFT
- Colors: 16.7 million
- Operating system (configurable): Windows® 10 IoT Enterprise 2021
- Operating temperature: -20°C to +50°C
- Storage temperature: -40°C to +70°C
- Relative humidity: 10% to 95%, non-condensing
- Housing: aluminum/sheet steel
- Degree of protection: IP66 (front), IP30 (back)
- Power supply: 24 V DC ±20%
- Mounting type: front installation
- Approvals: UL/cUL, Class I, Div 2 (future)

## Your advantages

- ✓ Passive cooling and no moving parts (excludes i7)
- ✓ Easy access to all essential components, including storage devices and RTC battery
- ✓ Glove-capable PCAP touchscreens in full HD resolution
- ✓ Individually configurable
- ✓ Windows® 11 ready



## VL3 series panel PCs



Designation	VL3 PPC		
Item number	1376798		
Display size (cm / in)	39.6 / 15.6"	47 / 18.5"	54.6 / 21.5"
Touch technology	10 pt. projected capacitive (PCAP), glove capable, wet application suitable		
Resolution, W x H (pixels)	1920 x 1080 (Full HD)		
Brightness (cd/m²)	450	350	400
Backlight MTBF (h)	50,000		
Viewing angle, left / right / top / bottom (°)	85 / 85 / 85 / 85	89 / 89 / 89 / 89	89 / 89 / 89 / 89
Processor	Celeron 6305E 1.8 GHz (2 core); Core i3-1115G4E 3.0 GHz (2 core); Core i5-1145G7E 2.6 GHz (4 core); Core i7-1185G7E 2.8 GHz (4 core)		
Cooling	Passive (i7 model with convection booster)		
RAM (configurable)	Up to 64 GB DDR4		
Data memory (configurable)	2 x m.2 SSD, RAID capable		
Interfaces	2 x 10/100/1000 Mbps, RJ45, Intel i211 / i225 4 x USB 3.1 1 x COM (RS-232/422/485), BIOS configurable 1 x DisplayPort (DP++)		
System expansion options	WLAN a, b, g, n 4 x COM (RS-232/422/485), BIOS configurable 4 x COM (RS-232/422/485), ISOLATED, BIOS configurable 1 x GB Ethernet + 1 x COM (RS-232/422/485), 2 x USB		
Graphics processor	Intel UHD Graphics (Celeron, i3) / Intel Iris Xe (i5; i7)		
Dimensions incl. front plate, W x H x D (mm)	398 x 273 x 89	465 x 310 x 89	532 x 346 x 89
Mounting cutout, W x H (mm)	388 x 263	455 x 300	522 x 336
Weight (kg)	6.9 (7.1 with i7 configuration)	8 (8.2 with i7 configuration)	8.8 (9 with i7 configuration)
Power consumption (W) <sup>1</sup>	70 / 82 / 84 / 91	72 / 80 / 84 / 91	72 / 80 / 91 / 93

<sup>1</sup> Power consumption value represents maximum power consumption at 24V DC without system expansion options. Actual system power consumption depends on system loading. See user manual for details.

# Compact panel PCs

## General technical data

- Display type: TFT
- CPU: Intel® Celeron® N3350 1.1 / 2.4 GHz, passive cooled
- Memory: up to 8 GB
- Interfaces: 2 x (10/100/1000 MBit/s) RJ45 Intel i210, 2 x USB 2.0; 2 x USB 3.0, 1 x DP, WIFI option (configurable)
- Operating system: Windows® 10 IoT Enterprise
- Operating temperature: -5°C to +50°C
- Storage temperature: -20°C to +70°C
- Relative humidity: 10% to 90%, non-condensing
- Housing: Aluminum, steel sheet
- Degree of protection: IP65 (front), IP20 (back)
- Power supply: 24V DC ±20%
- Mounting options: front installation
- Approvals: CE, UL/cUL

## Your advantages

- ✓ Passive cooling and no moving parts
- ✓ Rugged, full metal construction
- ✓ Modern appearance and flush design
- ✓ Perfect for demanding budget applications



BL2 PPC 1200

## BL2 1200 series panel PCs



Designation	BL2 PPC7 1201-4/64-W10	BL2 PPC10 1201-4/128-W10	BL2 PPC 1200
Article number	1274012	1274014	1138377
Display size in inches	7"	10"	Configurable
Touch technology	10pt. Projected Capacitive (PCAP)		
Resolution (W x H in pixels)	1024 x 600	1280 x 800	System dependent
Brightness (in cd/m²)	300		
Backlight MTBF (in h)	50,000		
Viewing angle (left / right / top / bottom in °)	70 / 70 / 60 / 60	85 / 85 / 85 / 85	System dependent
RAM	4 GB DDR3		
Data memory	64 GB M.2 SSD	128 GB M.2 SSD	m.2 SSD, configurable
Dimensions incl. front plate (W x H x D in mm)	196 x 134 x 48	266 x 184 x 48	Size dependent
Mounting cutout (W x H in mm)	186 x 124	229 x 155	Size dependent
Weight (in kg)	2.1	2.9	System dependent
Power consumption (in W) <sup>1</sup>	25.7	31.9	System dependent

<sup>1</sup> Power consumption value represents maximum power consumption. Actual system power consumption depends on system loading. See user manual for details.



# Panel PCs with resistive touch

## General technical data

- Display type: TFT
- Colors: 16.2 million
- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel i210-AT
- Operating system: Windows® 10 IoT Enterprise
- Operating temperature: 0°C to +50°C
- Storage temperature: -40°C to +70°C
- Relative humidity: 5% to 95%, non-condensing
- Housing: sheet steel/aluminum
- Degree of protection: IP65 (front), IP20 (back)
- Power supply: 24 V DC ±20%
- Mounting type: front installation
- Approvals: UL/cUL

## Your advantages

- ✓ Passive cooling and no moving parts
- ✓ Easy connection to existing I/O devices via serial interfaces
- ✓ Individually configurable
- ✓ 7th generation Intel® processor (Intel's 15-year support roadmap)
- ✓ Windows® 10 IoT support

## BL2 series panel PCs with resistive touch



Designation	BL2 PPC 1000	BL2 PPC 2000	BL2 PPC 7000
Item number	2404845	2404846	1016236
Display size (cm / in.)	30.7 / 12.1"; 38.1 / 15"; 43 / 17"		
Touch technology	Analog resistive (polyester)		
Resolution, W x H (pixels)	1024 x 768 (XGA) / 1024 x 768 (XGA) / 1280 x 1024 (SXGA)		
Brightness (cd/m²)	500/300/350		
Backlight MTBF (h)	50,000		
Viewing angle, left / right / top / bottom (°)	Depends on the configuration	Depends on the configuration	Depends on the configuration
Processor	Intel® Celeron® N3350 1.1/2.4 GHz (dual-core)	Intel® Pentium® N4200 1.1/2.5 GHz (quad-core)	Intel® Core™ i5-7442EQ 2.1/2.9 GHz (quad-core)
Cooling	Passive		Convection booster
RAM (configurable)	max. 4 GB DDR3L	max. 8 GB DDR3L	Max. 16 GB DDR4
Data memory (configurable)	M.2 SSD		
Number of slots	1		
USB	2 x USB 2.0, 2 x USB 3.0		
Serial interfaces	1 x COM (RS-232/422/485), 2 x COM (RS-232)		
Video output	2 x DisplayPort (DP++)		
Graphics processor	Intel® HD Graphics 500	Intel® HD Graphics 505	Intel® HD Graphics 630
PCI/PCIe slots (configurable)	1 x Mini PCIe 802.11 a/b/g/n WLAN		
Dimensions incl. front plate, W x H x D (mm)	365 x 282 x 84/410 x 309 x 86/452 x 356.5 x 86		
Mounting cutout, W x H (mm)	334 x 253/386.6 x 285.6/424 x 329.5		
Weight (kg)	4.1/5.7/7.1		4.6/6.2/7.6
Power consumption (W) <sup>1</sup> depending on screen size	31.9/34.8/42.7	39.4/42/46.8	52.6/54/60

<sup>1</sup> Power consumption value represents maximum power consumption. Actual system power consumption depends on system loading. See user manual for details.

# Stand-alone IP65-protected panel PCs

The BL2 PPC AIO65 is a family of configurable, all-around IP65-protected industrial PCs. Choose from a variety of performance classes, display and mounting options, as well as matching expansion options, including the push-button box and stack light. The modular design of the BL2 PPC AIO65 offers an advanced level of solution flexibility – directly on the machine.



# All-in-one panel PCs with IP65 protection

## General technical data

- Display type: TFT
- Colors: 16.7 million
- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel® i210-AT
- USB interfaces: 2 x USB Host 2.0, 2 x USB 3.0
- Serial interfaces: 1 x COM (RS-232/422/485)
- Operating System: Windows® 10 IoT Enterprise
- Operating temperature: 0°C to +45°C
- Storage temperature: -40°C to 70°C
- Relative humidity: 5% to 95%, non-condensing
- Housing: Aluminum
- Degree of protection: IP65 all-around
- Power supply: 24 V DC ±20%
- Mounting types: VESA, swing arm mount, pole mount
- Approvals: UL/cUL



## Your advantages

- ✓ All-around IP65 protection without the need for a cabinet
- ✓ Attractive, modern industrial design
- ✓ Scalable processor performance
- ✓ Easy installation and service
- ✓ Highly reliable with passive cooling and solid state mass storage media
- ✓ Optional push-buttons box and stack light



## BL2 series all-in-one panel PCs




				
Designation	BL2 PPC AIO65 2000	BL2PPC AIO65 7000	BL2 AIO65 9 PB Box	BL2 AIO65 11PB Box
Item number	1138366	1138367	1160210	1160209
Display size (cm / in.)	39.6 / 15.6"; 47 / 18.5"; 54.6 / 21.5"		PB boxes are compatible only with pole-mount, not VESA	Push-button box, prepared to accommodate eleven 22-mm push-buttons.  Wiring and buttons not included.
Touch technology	PCAP multi-touch			
Resolution, W x H (pixels)	1920 x 1080			
Brightness (cd/m²)	400 / 450 / 300			
Backlight MTBF (h)	50000			
Viewing angle, left / right / top / bottom (°)	15.6" and 18.5" display: 85/85/80/80 21.5" display: 89 / 89 / 89 / 89		Push-button box, prepared to accommodate nine 22-mm push-buttons.  Wiring and buttons not included.	
Processor	Intel® Pentium® N4200 1.1 / 2.5 GHz (4-core)	Intel® Core™ i5-7442EQ 2.1 / 2.9 GHz (4-core)		
RAM (configurable)	Max. 8 GB DDR3L	Max. 16 GB DDR4		
Data memory (configurable)	mSATA SSD			
Graphics processor	Intel® HD Graphics 505	Intel® HD Graphics 630		
Dimensions VESA mount, W x H x D (mm)	410 x 275 x 86 / 475 x 313 x 86 / 546 x 352 x 86			
Dimensions pole mount, W x H x D (mm)	410 x 275 x 100 / 475 x 313 x 100 / 546 x 352 x 100			
Weight VESA mount (kg)	7.7 / 8.4 / 9.4			
Weight pole mount (kg)	8.6 / 9.3 / 9.7			
Power consumption (W) <sup>1</sup>	49.4 / 52.1 / 48	64.6 / 67 / 60		

<sup>1</sup> Power consumption value represents maximum power consumption. Actual system power consumption depends on system loading. See user manual for details.

# Hygienic industrial panels in stainless steel

Hygienic industrial PCs and monitors from Phoenix Contact are protected on all sides in a stainless-steel enclosure where all device surfaces are shielded from contaminant build-up. These powerful and reliable panel PCs and monitors are optimized for use with machines in the hygienic-restricted areas of the pharma, food, beverage, and chemical industries.

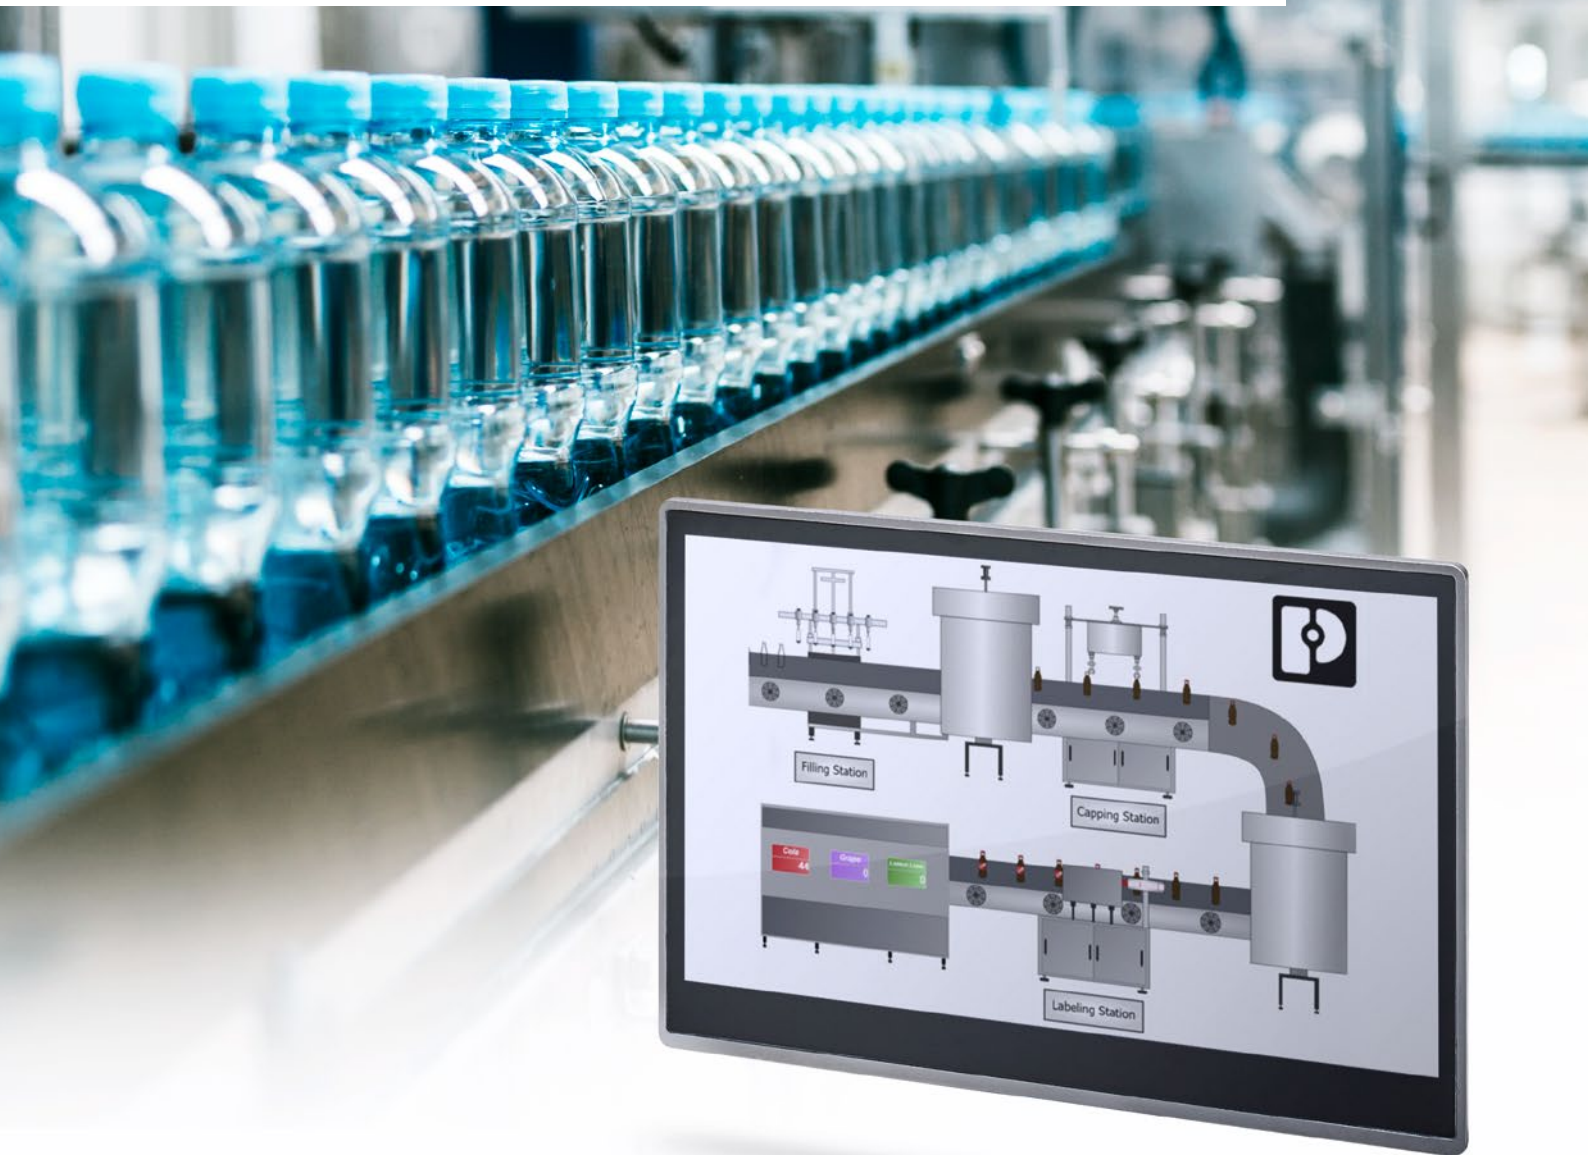



# Panels with stainless-steel enclosures

## General technical data

- Display type: TFT
- Colors: Max of 16.2 million colors
- Operating temperature: 0°C to +45°C, (17,3" panel version 0°C to 50°C)
- Storage temperature -10°C to +60°C, (17,3" panel version 0°C to +50°C)
- Relative humidity: 10% to 85%, non-condensing
- Housing: All-around protected stainless steel (V2A / 304)
- Protection class: IP69K all around
- Power supply: 24 V DC (18 - 30 V DC)
- Mounting types: VESA, swing arm mount, pole mount
- Approvals: IEC/UL 61010 (17,3" and 23,8" PPC/FPM only)

## Your advantages

- ✓ Robust and powerful in extreme environments
- ✓ Rugged construction inside a stainless-steel enclosure
- ✓ Hygienic design with passive cooling
- ✓ Scalable processor performance
- ✓ Easy installation to VESA, pole, or swing arm systems
- ✓ Options to connect to WLAN or Bluetooth-capable devices
- ✓ Capacitive multi-touch display can be operated with gloves



## Hygienic industrial PCs and monitors



Designation	All-in-one industrial PC		Monitors		
	PPC 17.3 AIO 69K	PPC 23.8 AIO 69K	FPM 15.6 69K	FPM 17.3 69K	FPM 23.8 69K
Item number	1262469	1262470	1261660	1261657	1261659
Display size (cm / in.)	44 / 17.3"	60.4 / 23.8"	39.6 / 15.6"	44 / 17.3"	60.4 / 23.8"
Touch technology	PCAP multi-touch				
Resolution, W x H (pixels)	1920 x 1080 (FHD)				
Brightness (cd/m²)	400	250	400	400	250
Backlight MTBF (h)	50,000	30,000	50,000	50,000	30,000
Viewing angle, left / right / top / bottom (°)	89 / 89 / 89 / 89		90 / 90 / 90 / 90	89 / 89 / 89 / 89	
Processor	Intel® Celeron™ 1.6 GHz (2980U) Intel® Core™ i5 1.9 GHz (4300U)		-	-	-
RAM	Up to 8 GB DDR3		-	-	-
Data memory	120 GB 2,5" SSD or 250 GB 2,5" SSD		-	-	-
Ethernet interfaces	2 x 1 Gbps Ethernet RJ45		-	-	-
Interfaces	1 x USB 2.0 2 x USB 3.0		1 x USB 2.0 1 x DisplayPort (DP)	3 x USB; 2.01 x USB slave 1 x HDMI; 1 x DisplayPort (DP)	
Wireless interfaces (optional)	Integrated WLAN-Modul IEEE 802.11 ac/a/b/g/n		-	-	-
Operating system (optional)	Windows® 10 IoT Enterprise		-	-	-
Dimensions, W x H x D (mm)	431 x 261 x 68	578 x 374 x 67	372 x 239 x 31	431 x 261 x 68	578 x 347 x 67
Weight (kg)	5	7.5	4.5	5	7.5
Power consumption (W)	Max. 96		Max. 48	Max. 48	Max. 12
Panel with screen shatter protection	(Configurable)		FPM 15.6 69K SP 1261658	FPM 17.3 69K SP 1261656	FPM 23.8 69K SP 1261662

# Rugged all-around protected panels

The advanced design and quality of the VMT 9000 series is particularly suitable for machine and system operation directly in the field. Features such as additional front keys or the sunlight-readable display are already included as standard with the terminal family. In combination with the particularly compact and at the same time extremely robust housing, the operator terminals offer reliable operation even in the toughest environments.



# All-in-one panel PCs with small display sizes

## General technical data


- Display type: TFT
- Interfaces: 2 x (10/100/1000 Mbps), RJ45, 1 x COM (RS-232), 3 x USB 3.0, 1 x USB 3.0 on the front with cover, optional: 1 x COM (RS-232)
- Operating systems (configurable): Windows® 10 IoT Enterprise
- Optional: LTE/GPS module
- Optional: Wi-Fi 802.11 a/b/g/n/ac + Bluetooth
- Optional: RFID
- Battery connection for UPS
- Operating temperature: -30°C to 60°C
- Relative humidity: 5% to 95%, non-condensing
- Degree of protection: IP66
- Impact strength: IK08 (EN 62262)
- Supply voltage: 9 to 60 V DC
- Mounting type: VESA in back cover, optional additional holders

## Your advantages

- ✓ Display can be read in direct sunlight
- ✓ Can be operated when wearing work gloves (also with PCAP)
- ✓ Convenient operation using four customer-configurable front buttons
- ✓ Tool-free maintenance design for easy cleaning

## Stand-alone IP66 protected panel PCs with sunlight-readable displays



				
Designation	VMT 9000			
Item number	1084510 (configurable)			
Touch technology (configurable)	Analog resistive (polyester) / projective capacitive (PCAP)		Projective capacitive (PCAP)	Analog resistive (polyester) / projective capacitive (PCAP)
Display size (cm / in.)	26.4 / 10.4"	30.7 / 12.1"		38.1 / 15"
Resolution, W x H (pixels)	1024 x 768 (XGA)		1280 x 800 (WXGA)	1024 x 768 (XGA)
Brightness (cd/m²)	500	600	400	300
Backlight MTBF (h)	50,000			
Viewing angle, left / right / top / bottom (°)	88 / 88 / 88 / 88	70 / 70 / 80 / 80	88 / 88 / 88 / 88	
Processor	Intel® Atom™ x7-E3950 2 GHz			
RAM (configurable)	max. 8 GB LPDDR4			
Data memory (configurable)	64 GB eMMC, optional: 128 GB M.2 SSD			
Cooling	Passive			
Dimensions, W x H x D (mm)	277 x 249 x 50	312 x 277 x 50	331 x 256 x 50	380 x 326 x 50
Weight (kg)	3.2	3.65	3.7	4.7
Power consumption (W)	Depends on the configuration			



# Industrial touch monitors

Phoenix Contact offers multi-touch monitors in a modern industrial design for industrial operating concepts where the processing unit and display unit are physically separated. The robust devices can be used directly on the machine. A choice of graphical interfaces allows for easy connection to any PC without the need for adapters or converters.





# Touch monitors

## General technical data

- Display type: TFT
- Colors: 16.7 million
- Operating temperature: -10°C to +60°C
- Storage temperature: -20°C to +75°C
- Relative humidity: 10% to 90%, non-condensing
- Housing: sheet steel, painted
- Degree of protection: IP65 (front), IP20 (back)
- Power supply: 24 V DC ±20%
- Mounting type: front installation/VESA MIS-D, 100
- Approvals: UL/cUL

## Your advantages

- ✓ Multi-touch screens with 10-point technology
- ✓ PCAP multi-touch interface
- ✓ Numerous video interfaces
- ✓ Slim design




## Industrial monitors with PCAP touch



Designation	BL FPM 15.6	BL FPM 18.5	BL FPM 21.5
Item number	2402980	2402981	2400515
Display size (cm / in.)	39.6 / 15.6"	46.9 / 18.5"	54.6 / 21.5"
Touch technology	Projective capacitive (PCAP)		
Resolution, W x H (pixels)	1366 x 768 (WXGA)		1920 x 1080 (Full HD)
Brightness (cd/m²)	300		
Backlight MTBF (h)	50,000		
Viewing angle, left / right / top / bottom (°)	85 / 85 / 80 / 80		
USB	1 x USB 2.0		
With front USB	—		
Video input	1 x DisplayPort (DP++), 1 x VGA, 1 x DVI-D		
Front plate dimensions, W x H x D (mm)	417 x 312 x 6	491 x 321 x 10	562 x 382 x 9
Mounting cutout, W x H (mm)	401 x 296	475 x 306	547 x 367
Installation depth (mm)	46	41	42
Weight (kg)	5.48	6.24	7.87
Power consumption (W)	14.2	17.8	21.6

# Optimized data usage with edge computing for PLCnext Technology

Process your data at the edge of your network and take advantage of modern cloud solutions to save resources. Data processing close to data sources reduces network latency and increases the response time and flexibility of your application. These controllers combine the ruggedness of industrial PCs with open PLCnext Technology, enabling the setup of intelligent IoT edge solutions to close the gap between IT and OT worlds.

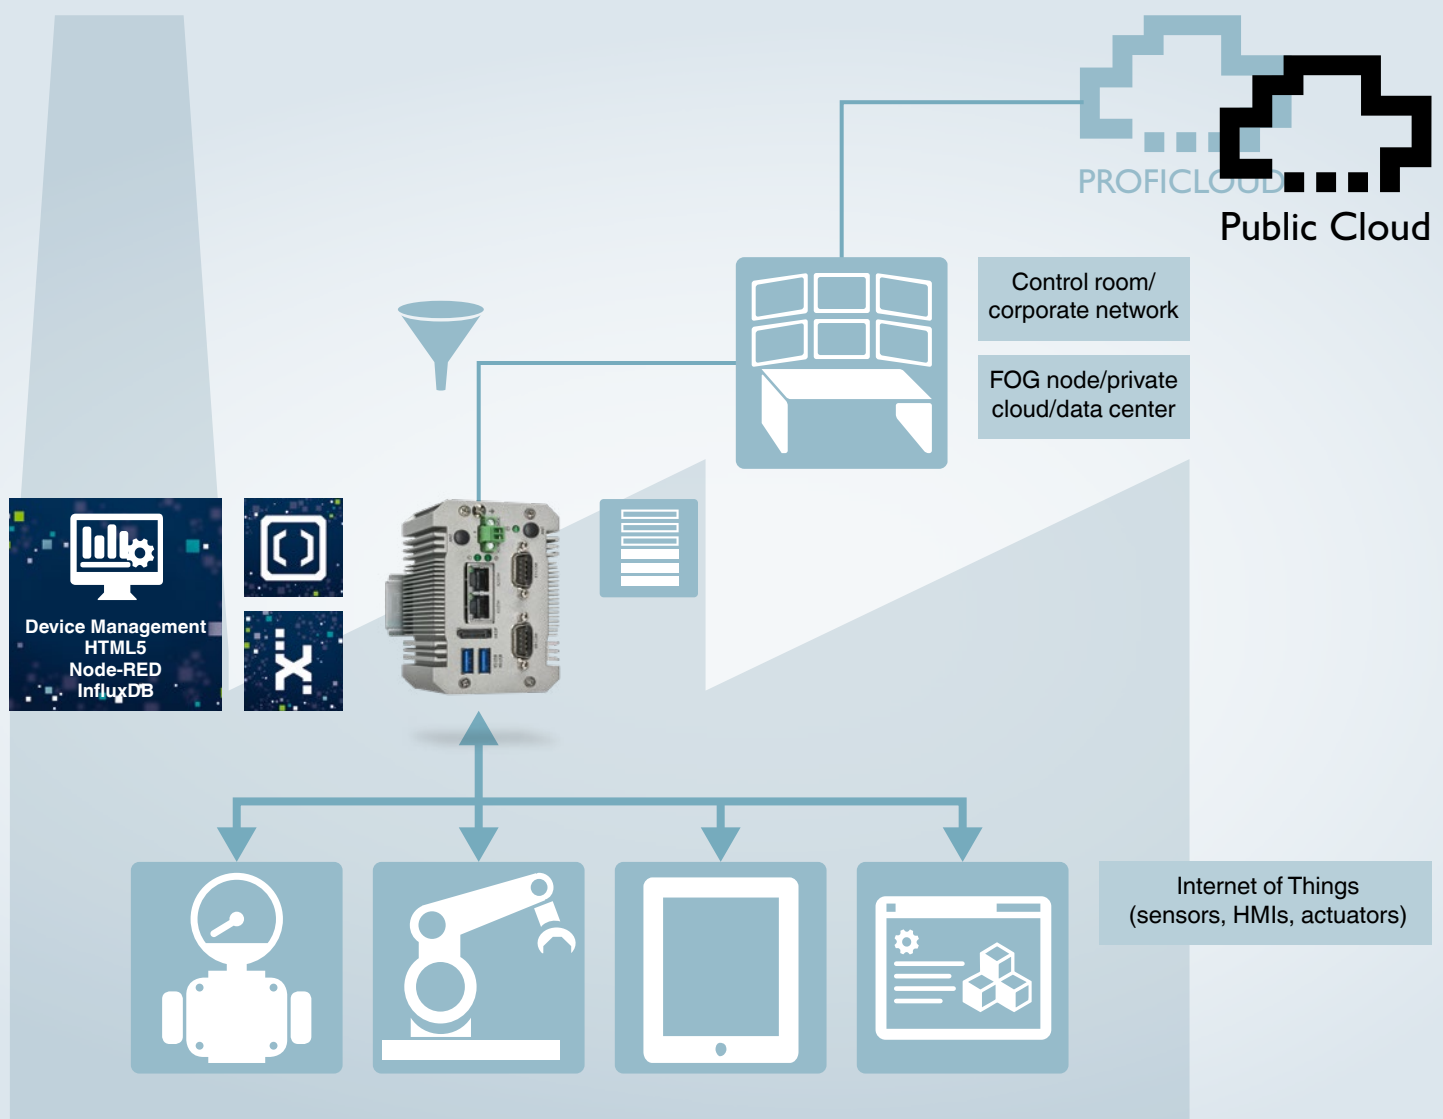

# Programmable edge computer

## General technical data

- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel i210
- Operating system: Linux
- Operating temperature: 0°C to 50°C
- Storage temperature: -40°C to 85°C
- Permissible humidity: 5% to 85%, non-condensing
- Housing material: Aluminum
- Degree of protection: IP30
- Power supply: 12-30 V DC  $\pm 20\%$
- Approvals: CE, UL
- PLCnext
- Node-RED
- Apps for direct download via the PLCnext Store
- HTML5-based configuration
- Local HTML5 server to support web-based visualization (eHMI)

## Your advantages

- ✓ Pre-installed software tools such as Node-RED provide a local time-series database and simple cloud connection
- ✓ PLCnext-programmable
- ✓ Multiple configuration and programming tools
- ✓ Rugged, industrial PC hardware
- ✓ Perfect for maximizing application uptime and data retention
- ✓ Reduced network data traffic and latency



## EPC 1500 series industrial edge computers



Designation	EPC 1502	EPC 1522
Item number	1185416	1185423
Processor	Intel® Celeron® N3350 1.1/2.4 GHz (dual core), passive cooled	
RAM	2 GB LPDDR4	4 GB LPDDR4
Storage	32 GB eMMC (onboard)	32 GB eMMC (onboard), 128 GB M.2 SSD
Interfaces	2 x USB 3.0	2 x USB 3.0, 2 x COM
Hardware security	Trusted Platform Module (TPM 1.2)	
Video output	1 x DisplayPort (DP++)	
Dimensions, W x H x D (mm)	97 x 46 x 94	97 x 63 x 94
Weight (kg)	0.55	0.65
Power consumption (W)	10.8	12.72
Device management	Pre-installed user interface via local HTML	
PLCnext inside	Yes	
Cloud	Local administration of Proficloud, AWS, Azure, Google Cloud	

# Industrial PCs for Ex environments

Our VL2 PPC EX series industrial PCs come with Triple HazLoc approval and are a perfect fit for applications in process plants and for utilization in the oil and gas industry.

They feature ATEX, IECEx, and UL Class I Div 2 approvals. These PCs are available with a powerful Intel® Core® i7 processor as a box PC, or as a panel PC in screen sizes from 15.6" to 21.5" to meet demanding application requirements.

## Worldwide use

These approvals enable our devices to be used in all potentially explosive environments around the globe:

- UL Class I, Div. 2 for use in North America
- ATEX for use throughout Europe
- IECEx for applications in potentially explosive environments around the globe





# Industrial PCs for Ex environments

## General technical data

- Display type: TFT
- Colors: 16.7 million
- Ethernet interfaces: 2 x (10/100/1000 Mbps), RJ45, Intel® i210
- Operating systems (configurable):  
Windows® 7 and Windows® 10 IoT Enterprise
- Housing: sheet steel/aluminum
- Degree of protection: IP65 (front), IP30 (back)
- Power supply: 24 V DC ±20%
- Maximum current consumption (in A): depends on the configuration
- Connected load (in W): depends on the configuration
- Mounting type: front installation
- Approvals: UL/cUL, Class I, Div 2, NEMA 4, IECEx, ATEX Zone 2/22

## Your advantages


- ✓ Passive cooling and no moving parts
- ✓ Certified for use in EX zones 2 and 22



## VL2 series panel PCs for Ex areas



Designation	VL2 BPC 9000 EX	VL2 PPC 9000 EX
Item number	1054023	1050364
Display size (cm / in.)	NA	39.6 / 15.6"; 47 / 18.5"; 54.6 / 21.5"
Touch technology	NA	Projective capacitive (PCAP)
Resolution, W x H (pixels)	NA	1366 x 768 (HD) / 1920 x 1080 (Full HD)
Brightness (cd/m²)	NA	400/300/300
Viewing angle, left / right / top / bottom (°)	NA	89 / 89 / 89 / 89
Processor	Intel® Core™ i7-6822EQ 2.0 GHz / 2.8 GHz (quad-core)	
Cooling	Convection booster	
RAM (configurable)	max. 32 GB DDR4	
Data memory (configurable)	2.5" HDD or SSD, RAID support 0/1	
Number of slots	1	
USB	2 x USB 2.0, 2 x USB 3.0	
Serial interfaces	1 x COM (RS-232/422/485) Optional: 2 x COM (RS-232) + 1 x COM (RS-232/422/485) Optional: Mini PCI Express (mPCIe) Optional: WLAN	
Video output	2 x DisplayPort (DP++)	
Graphics processor	Intel® HD Graphics 530	
PCI/PCIe slots (configurable)	1 x PCI or 1 x PCIe	
Dimensions, W x H x D (mm)	264 x 215 x 95	408 x 275 x 121 / 465 x 313 x 123 / 532 x 354 x 119
Mounting cutout, W x H (mm)	NA	394 x 263 / 455 x 303 / 522 x 344
Weight (kg)	4.8	8.6/10.4/12.7
Operating temperature	HDD: 0°C to +45°C SSD: -20°C to +50°C	
Relative humidity	5% to 95%, non-condensing	

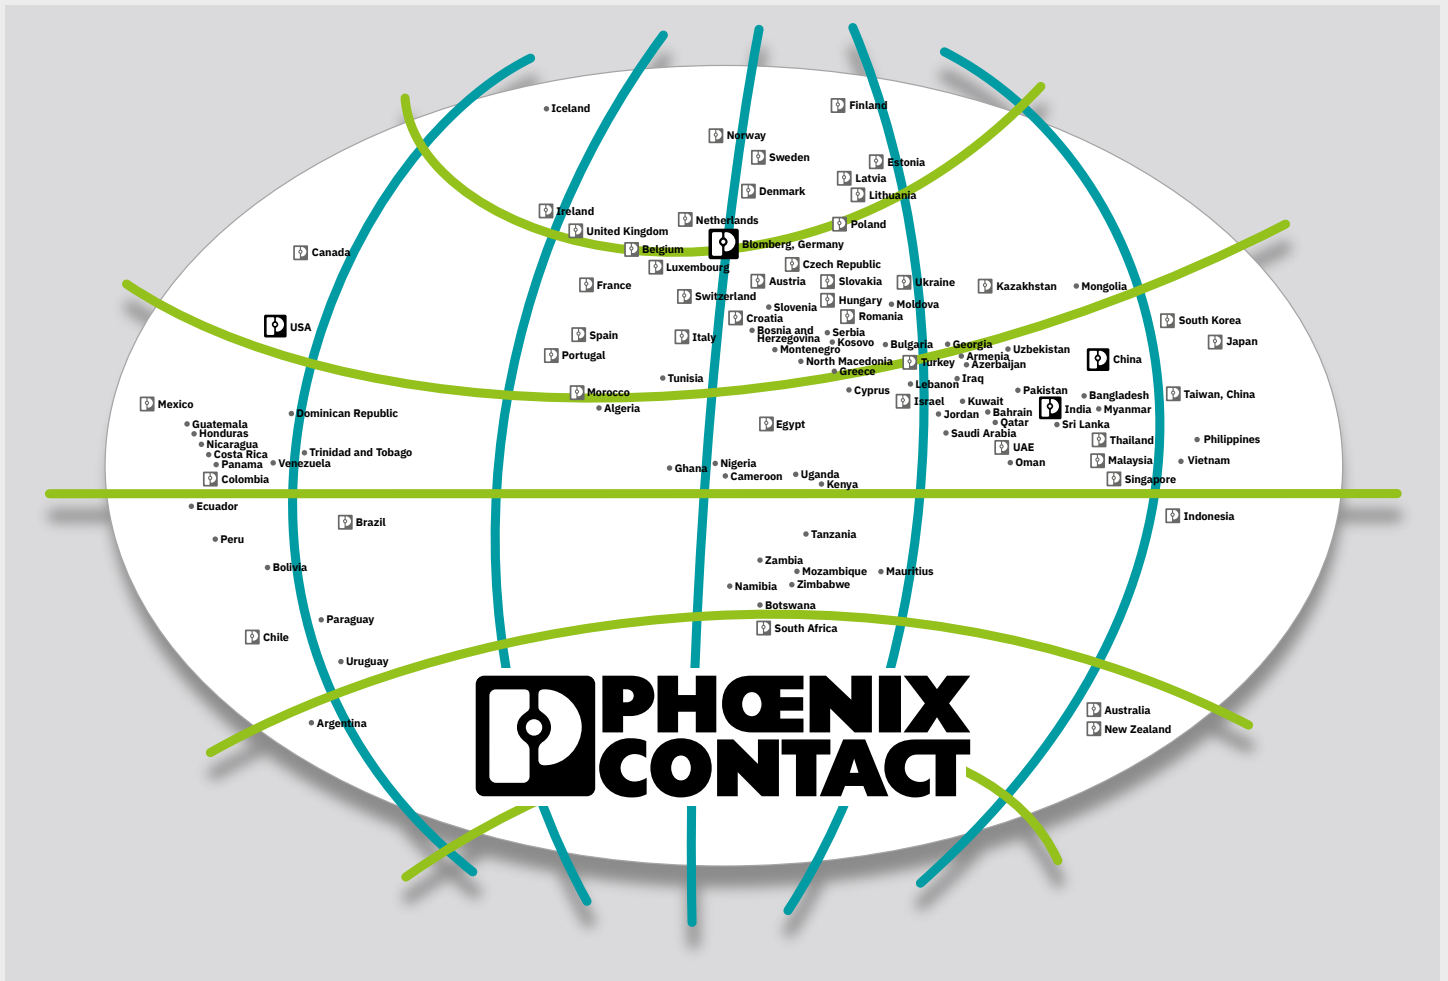

## Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing future-oriented products and solutions for the electrification, networking, and automation of all sectors of the economy and infrastructure. With a global network reaching across more than 100 countries with over 21,000 employees, we maintain close relationships with our customers, something we believe is essential for our common success.

Our wide range of innovative products makes it easy for our customers to implement the latest technology in a variety of applications and industries. This especially applies to the target markets of energy, infrastructure, industry, and mobility.

You can find your local partner at  
[phoenixcontact.com](https://phoenixcontact.com)