

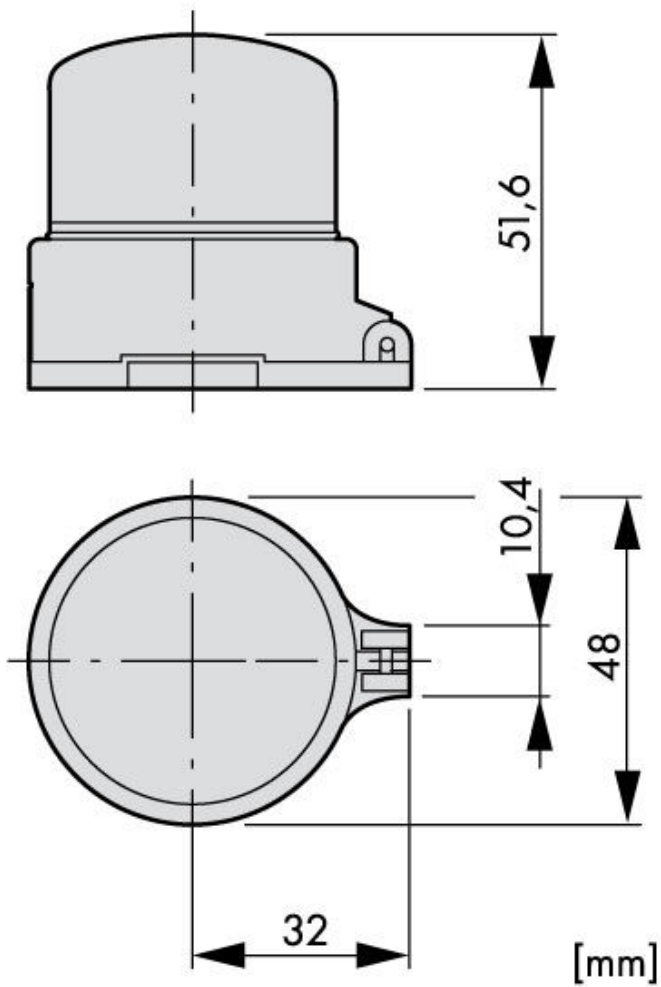
Data Sheet for Article: MM216397--

# Sealable shroud



## Technical Data

Series	MM
Illumination	non-illuminated
Make-up	accessories
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standards	IEC/EN 60947, VDE 0660
Mounting position	any
Type No.	M22-PL-PV

**Maßbild****Article Table**

DESCRIPTION	Order No.
Sealable shroud	MM216397