

## DATASHEET: MODULAR PUSH-BUTTON SWITCH WITH PUSH-BUTTON, 1 NO, 16A



BZ107410


### SCHRACK-INFO

- force guided lift terminal


### TECHNICAL DATA

Function	push-button
Function of contact	1 NO
Standards	according to EN 60068
Rated voltage	250 V AC
Rated frequency	50/60 Hz
Rated current	16 A
Max. back up fuse	20 A gG
Cap-dimensions	45mm
Dimensions of sockets	90mm
Width of sockets	17,5 mm (1TE)
Special snap-on mounting	according to IEC/EN 60715
Degree of protection	IP40
Terminals	force-guided lift-terminals with force
Terminal capacity	1-10 mm <sup>2</sup>
Finger and hand touch safe	according to BGV A3, ÖVE-EN 6
Climatic conditions	according to IEC/EN 60068

### DIMENSIONS

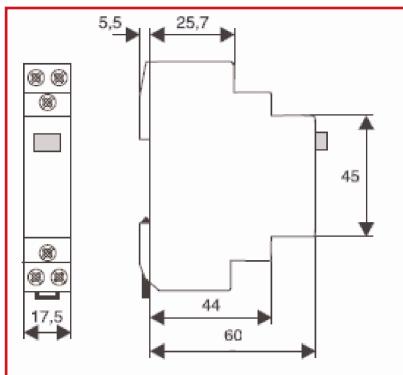

### WIRING DIAGRAM

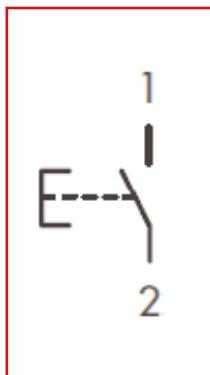

RATED CURRENT / CONTACTS	TE	TYPE	EAN-CODE	ORDER NO.
16 A/ 1NO	1	BZ T16/1S	9004840406436	BZ107410