

# PLC-FA-I-5X20-12-24UC - Fuse adapter



1186499

<https://www.phoenixcontact.com/au/products/1186499>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety plug adapter for use on a 6.2 mm PLC basic terminal block. For 5 x 20 mm fuses. Operating voltage: 12 ... 24 V AC/DC. With LED for fuse failure indication.

## Commercial data

Item number	1186499
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	DK62Z4
Product key	DK62Z4
GTIN	4063151226930
Weight per piece (including packing)	12.3 g
Weight per piece (excluding packing)	12.3 g
Customs tariff number	85366990
Country of origin	CN

## Technical data

### Notes

Notes on operation	If the fuse is defective, the downstream circuit is not off load. Current consumption when fuse is defective.
--------------------	--

### Product properties

Product type	Adapter
Product family	PLC-INTERFACE
Application	Adapter

#### Insulation characteristics: Air clearances and creepage distances in a circuit

Insulation	Safe isolation, reinforced insulation
Overvoltage category	III
Pollution degree	2

### Electrical properties

Current consumption	0.6 mA ... 2.3 mA (LED display)
Fuse	G / 5 x 20

#### Air clearances and creepage distances in a circuit

Rated insulation voltage	250 V AC
Rated surge voltage	6 kV

#### Supply

Current consumption	0.6 mA ... 2.3 mA (LED display)
---------------------	---------------------------------

### Dimensions

Width	6.2 mm
Height	80 mm
Depth	130 mm

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP20
Degree of protection (Installation location)	IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 85 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m

### Standards and regulations

#### Air clearances and creepage distances in a circuit

Standards/regulations	DIN EN 50178
-----------------------	--------------

### Mounting

# PLC-FA-I-5X20-12-24UC - Fuse adapter




1186499

<https://www.phoenixcontact.com/au/products/1186499>

Mounting position	any
-------------------	-----

Drawings


Diagram

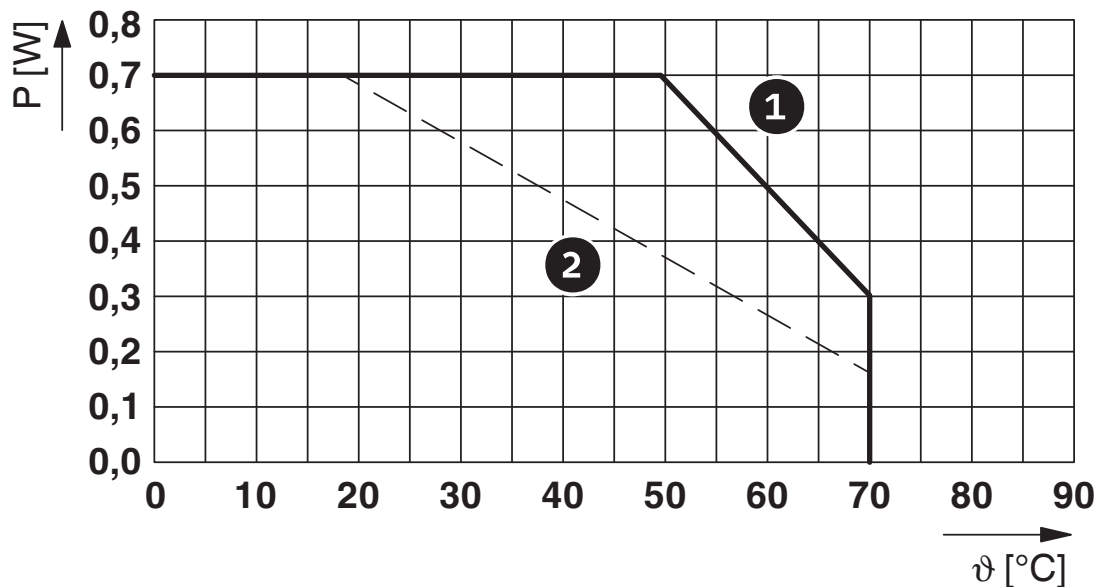

Derating: Short-circuit protection only: Nominal value 6.3 A / 0.7 W


- (1) Separate arrangement
- (2) Compound arrangement

Diagram

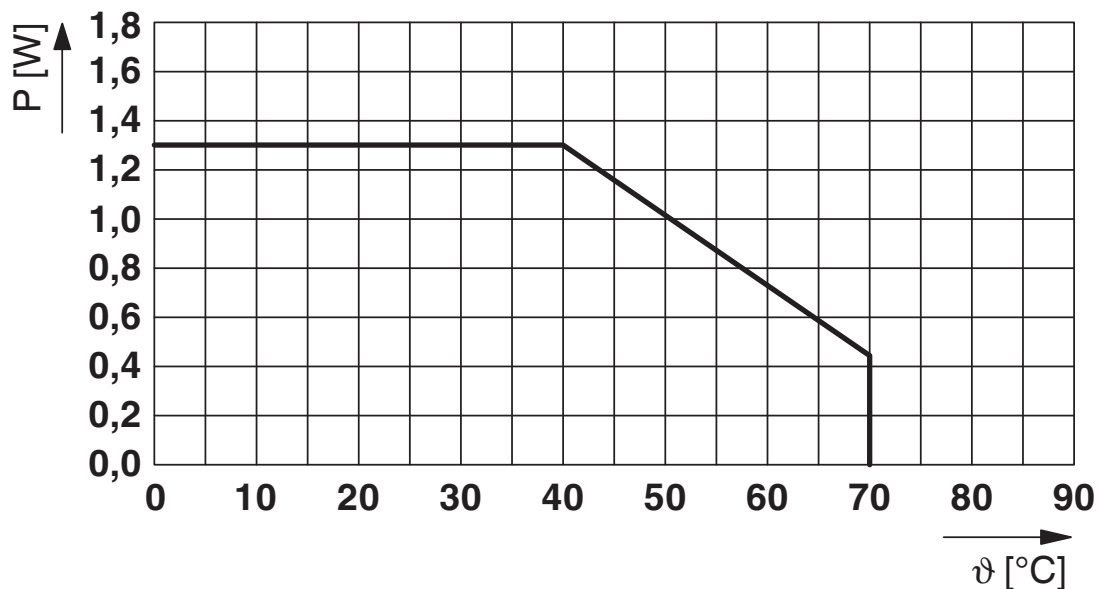

Derating: Overload and short-circuit protection: Nominal value 6.3 A / 1.6 W

Circuit diagram

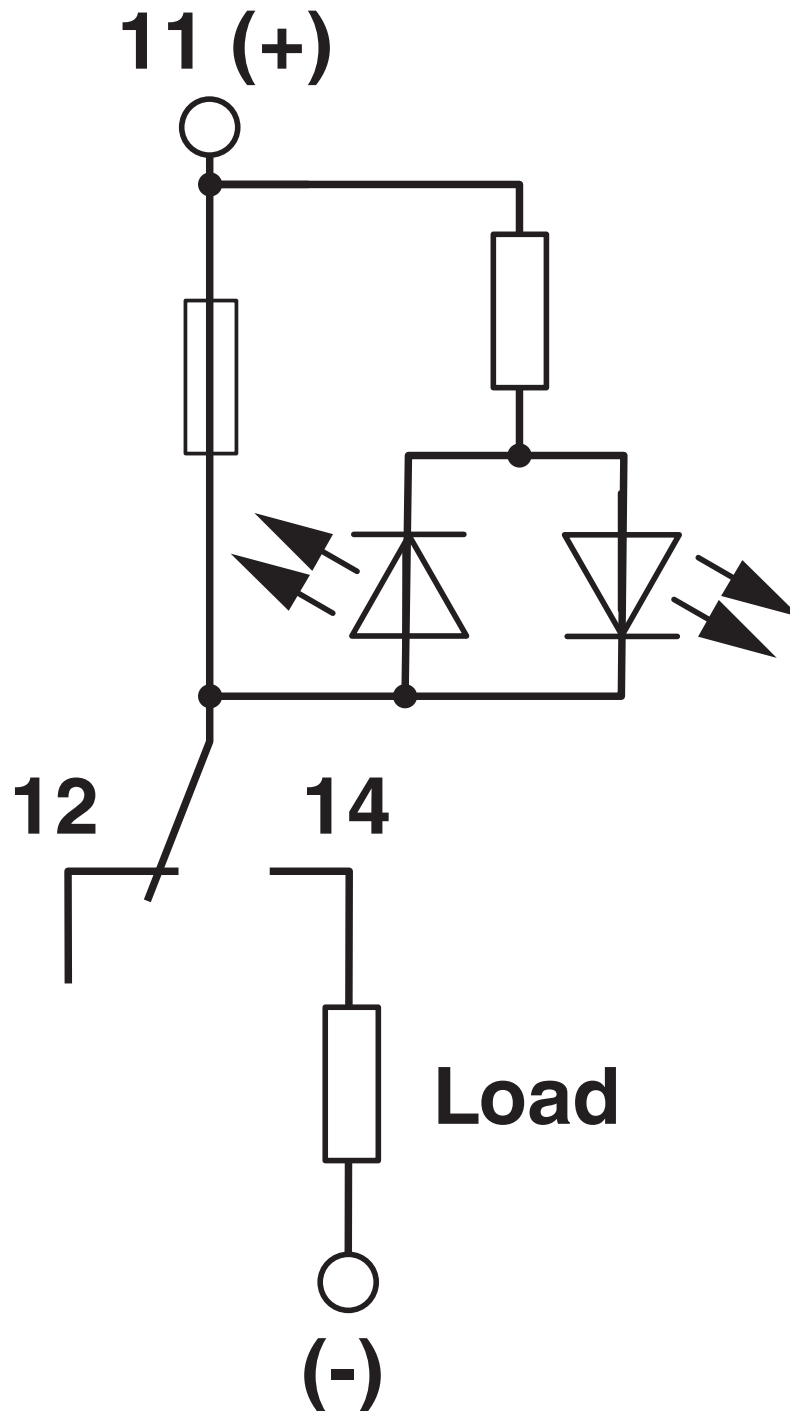

# PLC-FA-I-5X20-12-24UC - Fuse adapter



1186499

<https://www.phoenixcontact.com/au/products/1186499>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1186499>



**cULus Listed**

Approval ID: E140324



**cULus Listed**

Approval ID: E199827

# PLC-FA-I-5X20-12-24UC - Fuse adapter



1186499

<https://www.phoenixcontact.com/au/products/1186499>

## Classifications

### ECLASS

ECLASS-13.0

27371392

### ETIM

ETIM 9.0

EC002498

### UNSPSC

UNSPSC 21.0

39121100

# PLC-FA-I-5X20-12-24UC - Fuse adapter



1186499

<https://www.phoenixcontact.com/au/products/1186499>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)