

1200295

https://www.phoenixcontact.com/us/products/1200295

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cordless screwdriver in case, incl. battery, charging device 100 ... 240 V, 2 bits, two-speed gearbox, forward/reverse running and 16-stage clutch up to 450 rpm, hexagonal fast connection.

Your advantages

• 3.6 V

· Cordless screwdriver with two-speed gearbox, forward/reverse running and 16-stage clutch with drilling speed of up to 450 rpm

- Adjustable from 0.2 ... 4.3 Nm
- · Comfortable one-handed operation in a straight or angled position
- 6.3 mm hexagonal fast connection
- Compact design
- The set includes: screw bit, E6,3-1/4" drive, crosshead PH 2 x 75 mm and slotted, 0.8 mm x 5 mm x 75 mm

Commercial data

Item number	1200295
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BH32
Product key	BH3243
Catalog page	Page 454 (C-3-2019)
GTIN	4055626666433
Weight per piece (including packing)	1,850 g
Weight per piece (excluding packing)	1,750 g
Customs tariff number	84672920
Country of origin	TW



1200295

https://www.phoenixcontact.com/us/products/1200295

Set consists of

SF-ASD 16 - Cordless screwdriver

1200294

https://www.phoenixcontact.com/us/products/1200294



Cordless screwdriver, incl. battery, two-speed gearbox, forward/reverse running and 16-stage clutch up to 450 rpm, hexagonal quick connection.

SF-ASD 16/CHARGER - Charger

1200296 https://www.phoenixcontact.com/us/products/1200296

Charger, for 100 ... 240 V mains voltage, recognition of battery and parameter check, rapid charging, short-circuit resistant, polarized, operating mode display





1200295

https://www.phoenixcontact.com/us/products/1200295

Technical data

Notes

California Dressocition CE	Furthernisfermetics on Colifernials area. OF is susible under
California Proposition 65	Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration
oduct properties	
Product type	Torque tool
Type of packaging	Case
Battery-operated voltage	3.6 V
Battery charging	60 min
nsulation characteristics	
Protection class	II
ectrical properties Power consumption	7.2 W
Nominal voltage U _N	3.6 V DC
	3.6 V DC
Battery	
Battery charging	60.00 min
Battery-operated voltage	3.60 V DC
Battery capacity	2.00 Ah
nnection data	
Torque range	0.2 Nm 4.3 Nm
Output	universal, replaceable

Dimensions

Dimensional drawing	
Width	45 mm
Height	172 mm
Length	266 mm

Environmental and real-life conditions

Ambient conditions



1200295

https://www.phoenixcontact.com/us/products/1200295

Ambient temperature (operation)	5 °C 40 °C
Ambient temperature (storage/transport)	-25 °C 60 °C
Permissible humidity (operation)	95 % (<)



1200295

https://www.phoenixcontact.com/us/products/1200295

Drawings


Dimensional drawing




1200295

https://www.phoenixcontact.com/us/products/1200295

Schematic diagram

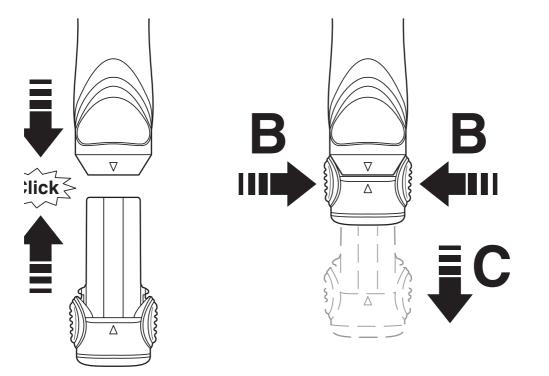


Schematic diagram

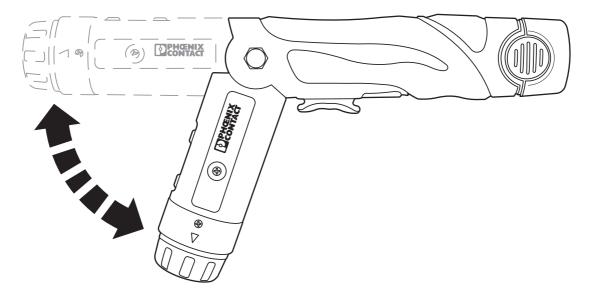



1200295

https://www.phoenixcontact.com/us/products/1200295

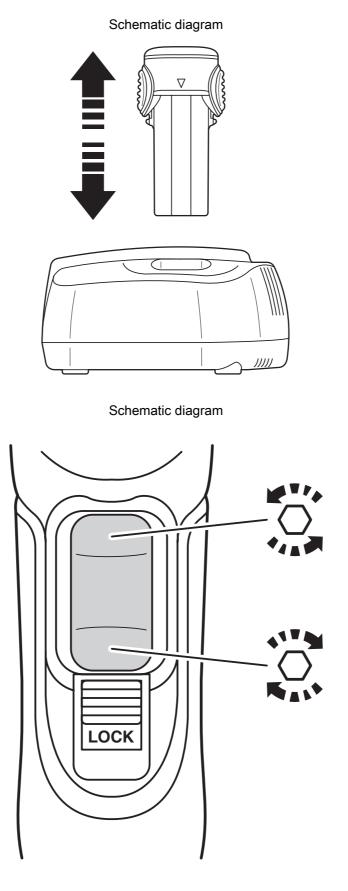



1200295

https://www.phoenixcontact.com/us/products/1200295

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1200295

EAC Approval ID: RU C-DE.BE02.B.03066



1200295

https://www.phoenixcontact.com/us/products/1200295

Classifications

ECLASS

	ECLASS-13.0	21050890		
ETIM				
	ETIM 9.0	EC001395		
UNSPSC				
	UNSPSC 21.0	27111700		

1200295

https://www.phoenixcontact.com/us/products/1200295

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-5
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1200295

https://www.phoenixcontact.com/us/products/1200295

Accessories

SF-ASD 16 - Cordless screwdriver

1200294

https://www.phoenixcontact.com/us/products/1200294



Cordless screwdriver, incl. battery, two-speed gearbox, forward/reverse running and 16-stage clutch up to 450 rpm, hexagonal quick connection.

SF-ASD 16/CHARGER - Charger

1200296 https://www.phoenixcontact.com/us/products/1200296

Charger, for 100 ... 240 V mains voltage, recognition of battery and parameter check, rapid charging, short-circuit resistant, polarized, operating mode display



1200295

https://www.phoenixcontact.com/us/products/1200295



SF-UBH - Adapter insert

1212590

https://www.phoenixcontact.com/us/products/1212590



Universal bit holder, E6.3-1/4" drive, with automatic locking, one-hand operation, magnetic, suitable for bits according to DIN 3126 C6.3 and E6.3 $\,$

SF-BIT-HEX 2,5-50 - Screw insert

1212646 https://www.phoenixcontact.com/us/products/1212646



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2.5 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173



https://www.phoenixcontact.com/us/products/1200295

SF-BIT-HEX 2,5-89 S - Screw insert

1200301

https://www.phoenixcontact.com/us/products/1200301



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2.5 x 89 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-HEX 2-50 - Screw insert

1212645 https://www.phoenixcontact.com/us/products/1212645



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173



https://www.phoenixcontact.com/us/products/1200295

SF-BIT-HEX 2-89 S - Screw insert

1200300

https://www.phoenixcontact.com/us/products/1200300



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2 x 89 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-HEX 3-50 - Screw insert

1212647 https://www.phoenixcontact.com/us/products/1212647



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 3 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

HŒR

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-HEX 4-50 - Screw insert

1212648

https://www.phoenixcontact.com/us/products/1212648



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 4 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-HEX 4-89 S - Screw insert

1200302 https://www.phoenixcontact.com/us/products/1200302



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 4 x 89 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173



https://www.phoenixcontact.com/us/products/1200295



SF-BIT-HEX 5-50 - Screw insert

1212649

https://www.phoenixcontact.com/us/products/1212649



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 5 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-HEX 5-89 S - Screw insert

1200303 https://www.phoenixcontact.com/us/products/1200303



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173



https://www.phoenixcontact.com/us/products/1200295



SF-BIT-HEX 6-50 - Screw insert

1212650

https://www.phoenixcontact.com/us/products/1212650



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 6 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-HEX 8-50 - Screw insert

1212651 https://www.phoenixcontact.com/us/products/1212651



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 8 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PH 1-50 - Screw insert

1212579

https://www.phoenixcontact.com/us/products/1212579



Screw bit, PH cross, E6.3-1/4" drive, Size: Ph 1 x 50 mm, hardened, suitable for holders as per DIN 3126-F 6.3 / ISO 1173

SF-BIT-PH 2-50 - Screw insert

1212580 https://www.phoenixcontact.com/us/products/1212580



Screw bit, PH cross, E6.3-1/4" drive, size: PH 2 x 50 mm, hardened, suitable for holders as per DIN 3126-F 6.3 / ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PH 3-50 - Screw insert

1212581

https://www.phoenixcontact.com/us/products/1212581



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 3 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PH 1-70 - Screw insert

1212582 https://www.phoenixcontact.com/us/products/1212582



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PH 2-70 - Screw insert

1212583

https://www.phoenixcontact.com/us/products/1212583



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 2 x 70 mm, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PH 3-70 - Screw insert

1212584 https://www.phoenixcontact.com/us/products/1212584



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 3 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-PHSL 1-70 - Screw insert

1212479

https://www.phoenixcontact.com/us/products/1212479



Screw bit, positive/negative PH/bladed, E6.3-1/4" drive, size: PH 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PHSL 2-70 - Screw insert

1212601 https://www.phoenixcontact.com/us/products/1212601



Screw bit, positive/negative PH/bladed, E6.3-1/4" drive, size: PH 2 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1174

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PZ 1-50 - Screw insert

1212591

https://www.phoenixcontact.com/us/products/1212591



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 1 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PZ 2-50 - Screw insert

1212592 https://www.phoenixcontact.com/us/products/1212592



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 2 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PZ 3-50 - Screw insert

1212593

https://www.phoenixcontact.com/us/products/1212593



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 3 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PZ 1-70 - Screw insert

1212594 https://www.phoenixcontact.com/us/products/1212594



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-PZ 2-70 - Screw insert

1212595

https://www.phoenixcontact.com/us/products/1212595



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 2 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PZ 3-70 - Screw insert

1212596 https://www.phoenixcontact.com/us/products/1212596



Screw bit, PZ crosshead, E6.3-1/4" drive, size: PZ 3 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-PZSL 1-70 - Screw insert

1212603

https://www.phoenixcontact.com/us/products/1212603



Screw bit, positive/negative PZ/bladed, E6.3-1/4" drive, size: PZ 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-PZSL 2-70 - Screw insert

1212604 https://www.phoenixcontact.com/us/products/1212604



Screw bit, positive/negative PZ/bladed, E6.3-1/4" drive, size: PZ 2 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173



https://www.phoenixcontact.com/us/products/1200295

SF-BIT-SL 0,45X2,4-70 - Screw insert

1212607

https://www.phoenixcontact.com/us/products/1212607



Screw bit, slotted, E6.3-1/4" drive, size: 0.45 x 2.4 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-SL 0,5X3,0-50 - Screw insert

1212566 https://www.phoenixcontact.com/us/products/1212566



Screw bit, bladed, E6.3-1/4" drive, size: $0.5 \times 3.0 \times 50$ mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

HŒR



https://www.phoenixcontact.com/us/products/1200295

SF-BIT-SL 0,5X3,0-70 - Screw insert

1212567

https://www.phoenixcontact.com/us/products/1212567



Screw bit, bladed, E6.3-1/4" drive, size: 0.5 x 3.0 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-SL 0,6X3,5-50 - Screw insert

1212568 https://www.phoenixcontact.com/us/products/1212568



Screw bit, bladed, E6.3-1/4" drive, size: 0.6 x 3.5 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

HŒR

1200295

https://www.phoenixcontact.com/us/products/1200295

DPHŒNIX CONTACT

SF-BIT-SL 0,6X3,5-70 - Screw insert

1212569

https://www.phoenixcontact.com/us/products/1212569



Screw bit, slot, E6.3-1/4" drive, Size: 0.6 x 3.5 x 70 mm, hardened, suitable for holders as per DIN 3126-F 6.3 / ISO 1173

SF-BIT-SL 0,8X4,0-50 - Screw insert

1212571 https://www.phoenixcontact.com/us/products/1212571



Screw bit, bladed, E6.3-1/4" drive, size: $0.8 \times 4.0 \times 50$ mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-SL 0,8X4,0-70 - Screw insert

1212572

https://www.phoenixcontact.com/us/products/1212572



Screw bit, bladed, E6.3-1/4" drive, size: 0.8 x 4.0 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-SL 1,0X5,5-50 - Screw insert

1212574 https://www.phoenixcontact.com/us/products/1212574



Screw bit, slot, E6.3-1/4" drive, Size: 1.0 x 5.5 x 50 mm, hardened, suitable for holders as per DIN 3126-F 6.3 / ISO 1173



1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-SL 1,0X4,0-70 - Screw insert

1212754

https://www.phoenixcontact.com/us/products/1212754



Screw bit, slotted, E6.3-1/4" drive, size: 1 mm x 4 mm x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-SL 1,0X5,5-70 - Screw insert

1212575 https://www.phoenixcontact.com/us/products/1212575



Screw bit, bladed, E6.3-1/4" drive, size: 1.0 x 5.5 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

HŒR

1200295

https://www.phoenixcontact.com/us/products/1200295

PHŒNIX CONTACT

SF-BIT-SL 1,2X6,5-70 - Screw insert

1212577

https://www.phoenixcontact.com/us/products/1212577



Screw bit, bladed, E6.3-1/4" drive, size: 1.2 x 6.5 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-SLS 0,6X3,5-50 - Screw insert

1212605 https://www.phoenixcontact.com/us/products/1212605



Screw bit, bladed, graded, E6.3-1/4" drive, for test socket screws, size: 0.6 x 3.5 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

PHŒNIX CONTACT

SF-BIT-SLS 0,9X6,5-50 - Screw insert

1212606

https://www.phoenixcontact.com/us/products/1212606



Screw bit, bladed, graded, E6.3-1/4" drive, for test socket screws, size: $0.9 \times 6.5 \times 50$ mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-TX 10-50 - Screw insert

1212573 https://www.phoenixcontact.com/us/products/1212573



Screw bit, Torx®, E6.3-1/4" drive, size: TX 10 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-TX 15-50 - Screw insert

1212576

https://www.phoenixcontact.com/us/products/1212576



Screw bit, Torx®, E6.3-1/4" drive, size: TX 15 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-TX 20-50 - Screw insert

1212578 https://www.phoenixcontact.com/us/products/1212578



Screw bit, Torx®, E6.3-1/4" drive, size: TX 20 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-TX 25-50 - Screw insert

1212585

https://www.phoenixcontact.com/us/products/1212585



Screw bit, Torx®, E6.3-1/4" drive, size: TX 25 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-TX 30-50 - Screw insert

1212586 https://www.phoenixcontact.com/us/products/1212586



Screw bit, Torx®, E6.3-1/4" drive, size: TX 30 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295



SF-BIT-TX 40-50 - Screw insert

1200161

https://www.phoenixcontact.com/us/products/1200161



Screw bit, Torx®, E6.3-1/4" drive, size: TX 40 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SF-BIT-TX 8-50 - Screw insert

1212570 https://www.phoenixcontact.com/us/products/1212570



Screw bit, Torx®, E6.3-1/4" drive, size: TX 8 x 50 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

1200295

https://www.phoenixcontact.com/us/products/1200295

SF-BIT-HEXB 5-89 - Screw insert

1208911

https://www.phoenixcontact.com/us/products/1208911



Screw bit, hexagonal with ball head, E6.3-1/4" drive, size: Hex 5 x 89 mm, hardened, suitable for holder according to DIN 3126-F 6.3/ISO 1173

SF-ASD 16/ACCU 2,0 AH - Battery module

1314530 https://www.phoenixcontact.com/us/products/1314530



Replacement battery, 2.0 Ah, lithium-ion, 3.6 V, for SF-ASD 16 cordless screwdriver

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com