

https://www.phoenixcontact.com/au/products/1396316



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Multiband omnidirectional antenna for wall or mast mounting, 0.6 GHz  $\dots$  7.1 GHz, gain: 1 dBi  $\dots$  3 dBi, degree of protection: IP67, seawater-resistant, connection: N (female), incl. mounting bracket and mast clamps

## Your advantages

- Ideally suited for freely mobile or stationary applications in 2G/3G/4G/5G cellular networks
- · Universal use with the wide frequency range
- · Resistant to salt water
- Future-proof, thanks to the use of lead-free materials

#### Commercial data

Item number	1396316
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNC6A2
Product key	DNC6A2
GTIN	4063151780616
Weight per piece (including packing)	206 g
Weight per piece (excluding packing)	141 g
Customs tariff number	85177100
Country of origin	TW



https://www.phoenixcontact.com/au/products/1396316



## Technical data

#### Notes

Note on application

	Note on application	Only for industrial use
--	---------------------	-------------------------

## Product properties

Product type	Antenna
Scope of supply	included mounting bracket and mast clamps
Radiation characteristics	Omnidirectional
Gain	2 dBi (617 MHz 960 MHz)
	1 dBi (1.4 GHz 1.6 GHz)
	2 dBi (1.7 GHz 2.7 GHz)
	3 dBi (3.3 GHz 7.1 GHz)
Vertical beamwidth	70 ° (617 MHz 960 MHz)
	60 ° (1.4 GHz 2.7 GHz)
	45 ° (3.3 GHz 5.9 GHz)
	30 ° 6.0 GHz 7.1 GHz
Horizontal beamwidth	360 °
Polarization	Linear vertical

## Electrical properties

Frequency band	2400 MHz
	868 MHz
	700 MHz
	800 MHz
	850 MHz
	900 MHz
	1700 MHz
	1800 MHz
	1900 MHz
	2100 MHz
	2600 MHz
	3600 MHz
	5 GHz
Frequency range	0.6 GHz 7.1 GHz
Impedance	50 Ω
Maximum capacity	1.00 W
Voltage standing wave ratio VSWR in a 50 $\Omega$ system	≤ 3.50

#### Connection data

Connection technology



https://www.phoenixcontact.com/au/products/1396316



Connection method	N (female)
Outside diameter	30 mm 45 mm (Mast)

#### **Dimensions**

Dimensional drawing	9 8 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9
Height	158 mm
Diameter	24 mm
Hole diameter	6 mm

#### External dimensions

## Material specifications

Material (Radom)	Plastic (glass-fiber reinforced)
Material (Holder)	Plastic (glass-fiber reinforced)
Material (U-bolt)	Stainless steel V2A
Flammability rating according to UL 94	V0

### Cable/line

Other resistance	salt water resistant
------------------	----------------------

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-30 °C 70 °C
Ambient temperature (storage/transport)	-40 °C 85 °C
Wind velocity	220 km/h

## Standards and regulations

Other resistance	salt water resistant
------------------	----------------------

## Mounting


Mounting type	Panel mounting
	Mast mounting
Assembly note	Outdoors and indoors



https://www.phoenixcontact.com/au/products/1396316



## Drawings

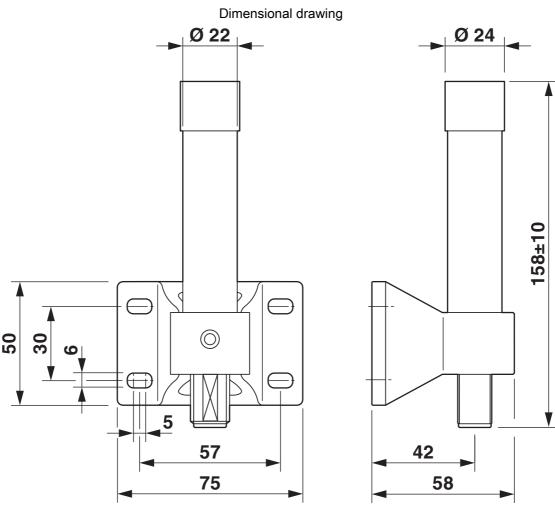


Dimensional drawing



https://www.phoenixcontact.com/au/products/1396316





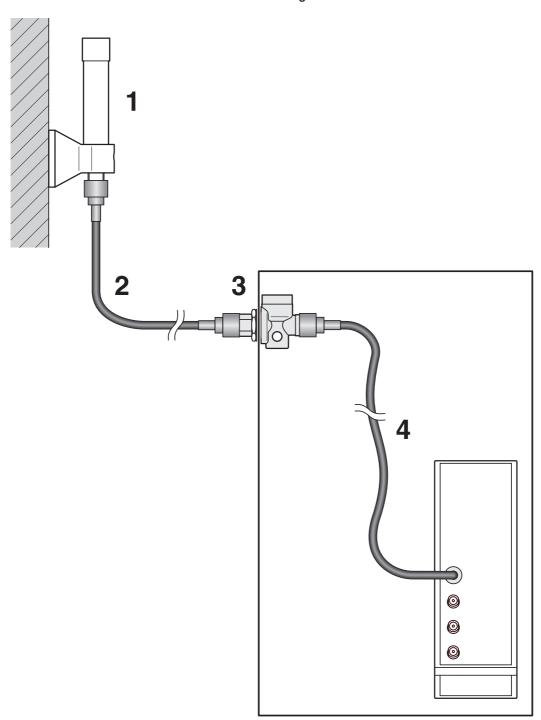


Installation example (antenna cable and surge protection available as accessories)

1396316


https://www.phoenixcontact.com/au/products/1396316



Schematic diagram

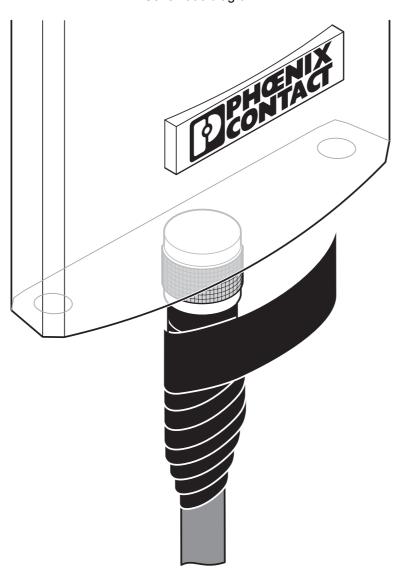

Sealing tape available as an accessory

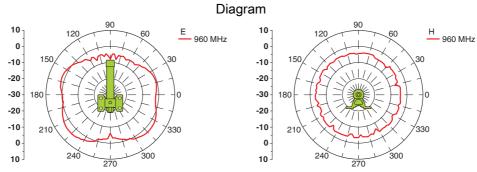


960 MHz directional characteristics




https://www.phoenixcontact.com/au/products/1396316




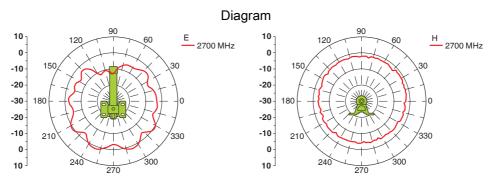

2700 MHz directional characteristics

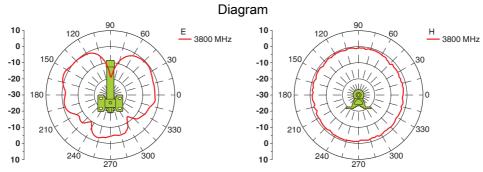

3800 MHz directional characteristics

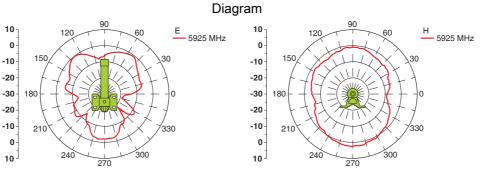

5925 MHz directional characteristics



1396316

https://www.phoenixcontact.com/au/products/1396316

## Classifications

#### **ECLASS**

	ECLASS-13.0	19070105	
ETIM			
	ETIM 9.0	EC001698	



https://www.phoenixcontact.com/au/products/1396316



## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			
REACH candidate substance (CAS No.)	No substance above 0.1 wt%		

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT PTY Ltd Unit 7, 2-8 South Street Rydalmere NSW 2116 1300 786 411 customerservice@phoenixcontact.com.au