

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Universal, 3-position, Plug straight M8, coding: A, Screw connection, knurl material: Brass, nickel-plated, external cable diameter 3.5 mm ... 5 mm

## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Screw connection: proven connection technology for a large selection of different conductors

## Commercial data

Item number	1501252
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AF2BAA
Product key	AF2BAA
Catalog page	Page 17 (C-2-2019)
GTIN	4017918612795
Weight per piece (including packing)	10.84 g
Weight per piece (excluding packing)	8.7 g
Customs tariff number	85366990
Country of origin	DE

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

## Technical data

### Notes

#### Assembly note

**NOTE:** Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.

### Mounting

#### Assembly note

The wires can be connected both with ferrules (without insulation) and without ferrules.

### Product properties


Product type	Circular connector (cable-side)
Sensor type	Universal
Number of positions	3
No. of cable outlets	1
Shielded	no
Coding	A

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

#### Dimensional drawing



Width	12 mm
Height	12 mm
Length	50 mm

#### External dimensions

Outside diameter	3.5 mm ... 5 mm
------------------	-----------------

#### Housing

Diameter housing	12 mm
------------------	-------

### Material specifications

Flammability rating according to UL 94	HB
Seal material	NBR
Material of grip body	PBT
Contact material	CuZn
Contact surface material	Au

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

Contact carrier material	PA
Material for screw connection	Brass, nickel-plated

## Connection data

### Conductor connection

Connection method	Screw connection
Connection cross section	0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> (without ferrule)
	0.08 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> (with ferrule)
	0.14 mm <sup>2</sup> ... 0.5 mm <sup>2</sup> (solid)
Connection cross section AWG	26 ... 20 (without ferrule)
Stripping length of the individual wire	4 mm
Tightening torque	0.2 Nm (M8 knurl)
	0.5 Nm (Connector with coupling sleeve)
	0.3 Nm ... 0.4 Nm (Pressure screw for outer cable diameter 3 mm ... 4 mm)
	0.8 Nm ... 1 Nm (Pressure screw in the case of external cable diameter 4 mm ... 5 mm)
	0.1 Nm (Screw terminal blocks)

## Electrical properties

Rated surge voltage	1.5 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	48 V AC
	60 V DC
Nominal current I <sub>N</sub>	4 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M8
Coding	A

## Cable/line

Signal type/category	Universal
Stripping length of the individual wire	4 mm

## Environmental and real-life conditions

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

## Ambient conditions

Degree of protection	IP67
Ambient temperature (operation) (male connector/female connector)	-40 °C ... 85 °C (Plug / socket)

## Standards and regulations

### M8

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104


# SACC-M 8MS-3CON-M-SW - Connector

1501252

<https://www.phoenixcontact.com/au/products/1501252>


## Drawings

Dimensional drawing

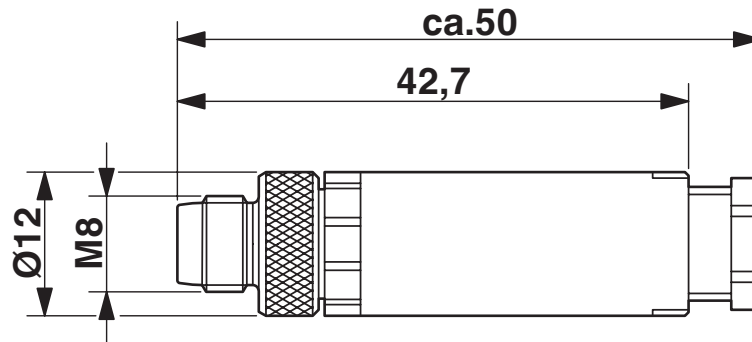

M8 x 1 male plug, straight version

Schematic diagram

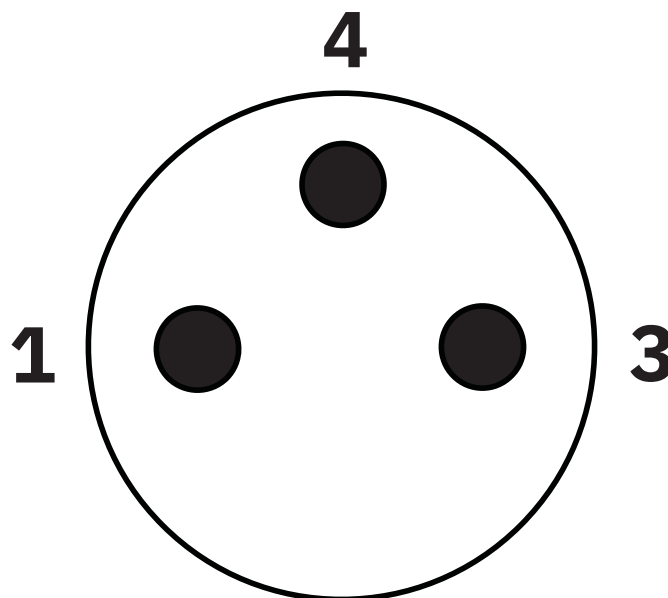

M8 plug pin assignment, 3-pos., view of pin side

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1501252>



### UL Listed

Approval ID: FILE E 221474

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	60 V	4 A	-	-



### cUL Listed

Approval ID: FILE E 221474

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	60 V	4 A	-	-

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

## Classifications

### ECLASS

ECLASS-13.0	27440116
-------------	----------

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-M 8MS-3CON-M-SW - Connector



1501252

<https://www.phoenixcontact.com/au/products/1501252>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	47c81d55-f76e-43d3-9f1e-32c1d2e26181

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)