

# SACC-M12MS-4QO-0,34 - Connector



1641714

<https://www.phoenixcontact.com/au/products/1641714>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Universal, 4-position, Plug straight M12, coding: A, Insulation displacement connection, knurl material: Plastic, external cable diameter 3.5 mm ... 6 mm

## Your advantages

- Safe use in the field, thanks to a high degree of protection
- Insulation displacement connection: innovative and time-saving assembly without stripping the single wire

## Commercial data

Item number	1641714
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AF2CCA
Product key	AF2CCA
Catalog page	Page 20 (C-2-2019)
GTIN	4017918925161
Weight per piece (including packing)	11.44 g
Weight per piece (excluding packing)	11.7 g
Customs tariff number	85366990
Country of origin	DE

# SACC-M12MS-4QO-0,34 - Connector

1641714

<https://www.phoenixcontact.com/au/products/1641714>

## Technical data

### Notes

Assembly note	<b>NOTE:</b> Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.
---------------	---

### Mounting

Assembly note	AWG 20 conductor cross section upon request
---------------	---


### Product properties

Product type	Circular connector (cable-side)
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A
Cable outlet	straight

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

Dimensional drawing	
Length	54 mm
Wrench size, union nut	13 mm

### External dimensions

Outside diameter	3.5 mm ... 6 mm
------------------	-----------------

### Housing

Diameter housing	16.3 mm
------------------	---------

### Material specifications

Flammability rating according to UL 94	V0
Seal material	NBR
Material of grip body	PA 6
Contact material	CuSn
Contact surface material	Ni/Au

# SACC-M12MS-4QO-0,34 - Connector



1641714

<https://www.phoenixcontact.com/au/products/1641714>

Contact carrier material	TPU
Material for screw connection	Plastic
Wire insulation material	PVC / PE / PP / rubber

## Connection data

### Conductor connection

Connection method	Insulation displacement connection
Connection cross section	0.14 mm <sup>2</sup> ... 0.34 mm <sup>2</sup>
Connection cross section AWG	26 ... 22
Tightening torque	0.4 Nm (M12 knurl)
	1.2 Nm (Pressure nut)

### Pin assignment

Contact   Color (signal designation)   Contact (optional)	1 = BN
	2 = WH
	3 = BU
	4 = BK

## Electrical properties

Rated surge voltage	2.5 kV
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U <sub>N</sub>	125 V AC
	125 V DC
Nominal current I <sub>N</sub>	4 A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Plug
Head cable outlet	straight
Head thread type	M12
Coding	A

## Cable/line

Signal type/category	Universal
External cable diameter	3.5 mm ... 6 mm

## Environmental and real-life conditions

### Ambient conditions

# SACC-M12MS-4QO-0,34 - Connector



1641714

<https://www.phoenixcontact.com/au/products/1641714>

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 80 °C (Plug / socket)
Ambient temperature (assembly)	-5 °C ... 50 °C (During assembly)

## Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	according to IEC 61076-2-101


# SACC-M12MS-4QO-0,34 - Connector

1641714

<https://www.phoenixcontact.com/au/products/1641714>


## Drawings

Dimensional drawing

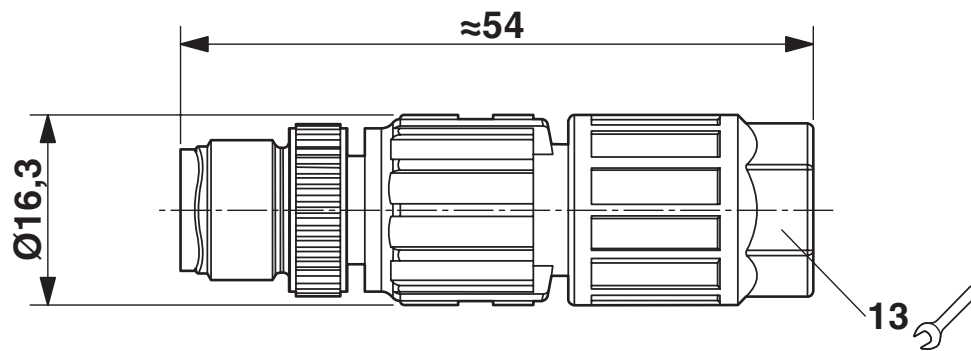

Plug, M12 x 1, straight, shielded

Functional drawing

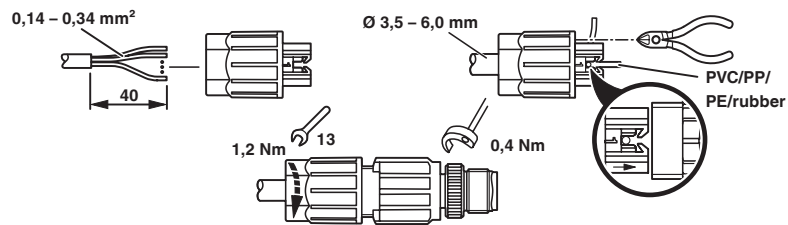


# SACC-M12MS-4QO-0,34 - Connector

1641714

<https://www.phoenixcontact.com/au/products/1641714>



Schematic diagram

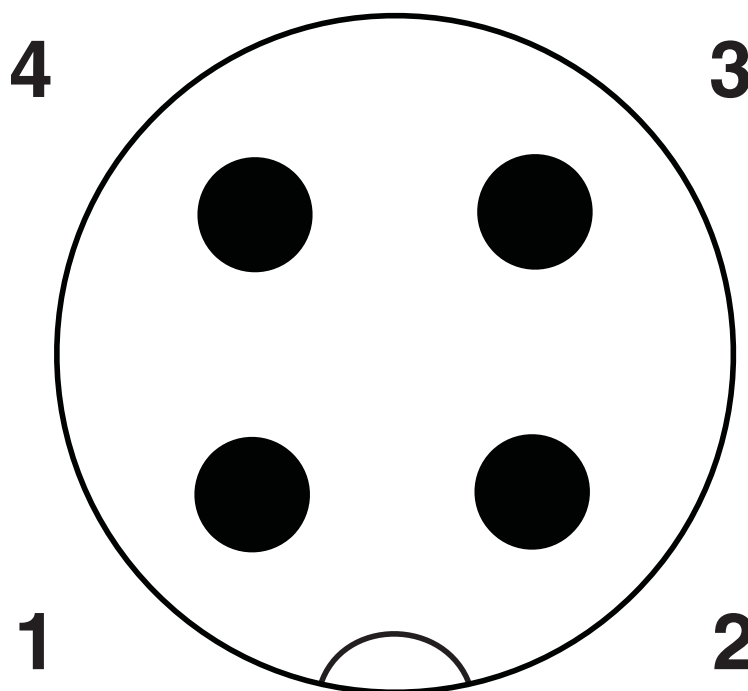

Pin assignment M12 plug, 4-pos., A-coded, view plug side

# SACC-M12MS-4QO-0,34 - Connector





1641714


<https://www.phoenixcontact.com/au/products/1641714>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1641714>

 <b>cUL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	300 V	4 A	-	-

 <b>UL Recognized</b> Approval ID: E118976				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	300 V	4 A	-	-

 <b>EAC</b> Approval ID: EAC-Zulassung	
---	--

<b>cULus Recognized</b>	
-------------------------	--

# SACC-M12MS-4QO-0,34 - Connector



1641714

<https://www.phoenixcontact.com/au/products/1641714>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# SACC-M12MS-4QO-0,34 - Connector



1641714

<https://www.phoenixcontact.com/au/products/1641714>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)