

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Please use the following item in new systems: 1066704.

Primary-switched MINI DC/DC converter for DIN rail mounting, input: 12 V DC ... 24 V DC, output: 5 V DC ... 15 V DC/2 A

## Product description

MINI DC/DC converter for MCR technology.

DC/DC converters alter the voltage level, regenerate the voltage at the end of long cables or enable the creation of independent supply systems by means of electrical isolation.

## Your advantages

- Electrical isolation: for setting up independent supply systems
- Support conversion to various voltage levels
- Constant voltage: output voltage regenerated even at the end of long cables

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2320018             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | CMDM42              |
| Product key                          | CMDM42              |
| Catalog page                         | Page 298 (C-4-2019) |
| GTIN                                 | 4046356478519       |
| Weight per piece (including packing) | 230 g               |
| Weight per piece (excluding packing) | 200 g               |
| Customs tariff number                | 85044095            |
| Country of origin                    | CN                  |

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

## Technical data

### Input data

#### DC operation

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Nominal input voltage range        | 12 V DC ... 24 V DC                         |
| Input voltage range                | 10 V DC ... 32 V DC (> 10.5 V DC start)     |
| Wide-range input                   | yes                                         |
| Input voltage range DC             | 10 V DC ... 32 V DC (> 10.5 V DC start)     |
| Voltage type of supply voltage     | DC                                          |
| Inrush current                     | < 10 A (typical)                            |
| Inrush current integral ( $I^2t$ ) | 0.2 A <sup>2</sup> s                        |
| Frequency range DC                 | 0 Hz                                        |
| Mains buffering time               | typ. 4 ms (12 V DC)<br>typ. 18 ms (24 V DC) |
| Current consumption                | 2.3 A (12 V DC)<br>1.1 A (24 V DC)          |
| Typical response time              | < 0.5 s                                     |
| Input fuse                         | 6.3 A (slow-blow, internal)                 |

### Output data

|                                                    |                                                                 |
|----------------------------------------------------|-----------------------------------------------------------------|
| Efficiency                                         | > 88 % (at 24 V DC and nominal values)                          |
| Output characteristic                              | U/I                                                             |
| Nominal output voltage                             | 12 V DC $\pm$ 1 %                                               |
| Setting range of the output voltage ( $U_{Set}$ )  | 5 V DC ... 15 V DC                                              |
| Nominal output current ( $I_N$ )                   | 2 A (-25 °C ... 60 °C)                                          |
| Derating                                           | 60 °C ... 70 °C (2.5 %/K)                                       |
| Feedback voltage resistance                        | 30 V DC                                                         |
| Protection against overvoltage at the output (OVP) | < 25 V DC                                                       |
| Residual ripple                                    | < 20 mV <sub>PP</sub> (20 MHz)                                  |
| Output power                                       | 24 W                                                            |
| Peak switching voltages nominal load               | < 10 mV <sub>PP</sub> (20 MHz)                                  |
| Maximum no-load power dissipation                  | < 1 W                                                           |
| Power loss nominal load max.                       | < 4.2 W                                                         |
| Connection in parallel                             | yes, for assembling redundant systems and increasing efficiency |
| Connection in series                               | yes                                                             |

#### Signal: DC OK active

|                         |                                          |
|-------------------------|------------------------------------------|
| Output description      | $U_{OUT} > 0.9 \times U_N$ : High signal |
| Continuous load current | $\leq$ 20 mA                             |

### Connection data

#### Input

|                   |                            |
|-------------------|----------------------------|
| Connection method | Pluggable screw connection |
|-------------------|----------------------------|

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section, rigid min.   | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.   | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 14                  |
| Stripping length                      | 7 mm                |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.5 Nm              |
| Tightening torque max                 | 0.6 Nm              |

## Output

|                                       |                            |
|---------------------------------------|----------------------------|
| Connection method                     | Pluggable screw connection |
| Conductor cross section, rigid min.   | 0.2 mm <sup>2</sup>        |
| Conductor cross section, rigid max.   | 2.5 mm <sup>2</sup>        |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup>        |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup>        |
| Conductor cross section AWG min.      | 24                         |
| Conductor cross section AWG max.      | 14                         |
| Stripping length                      | 7 mm                       |
| Screw thread                          | M3                         |
| Tightening torque, min                | 0.5 Nm                     |
| Tightening torque max                 | 0.6 Nm                     |

## Signal

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section, rigid min.   | 0.2 mm <sup>2</sup> |
| Conductor cross section, rigid max.   | 2.5 mm <sup>2</sup> |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 14                  |
| Screw thread                          | M3                  |
| Tightening torque, min                | 0.5 Nm              |
| Tightening torque max                 | 0.6 Nm              |

## Signaling

|                    |                         |
|--------------------|-------------------------|
| Types of signaling | LED                     |
|                    | Active switching output |

## Signal output: DC OK active

|                        |                                     |
|------------------------|-------------------------------------|
| Status display         | "DC OK" LED green                   |
| Note on status display | $U_{OUT} > 0.9 \times U_N$ : LED ON |
| Color                  | green                               |
| Note on status display | LED on                              |

## Electrical properties

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

|                                 |                     |
|---------------------------------|---------------------|
| Number of phases                | 1                   |
| Insulation voltage input/output | 1.5 kV (type test)  |
|                                 | 1 kV (routine test) |


## Product properties

|                            |                     |
|----------------------------|---------------------|
| Product type               | DC/DC converters    |
| MTBF (IEC 61709, SN 29500) | > 2072000 h (40 °C) |

## Insulation characteristics

|                     |     |
|---------------------|-----|
| Protection class    | III |
| Degree of pollution | 2   |

## Dimensions

|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 22.5 mm                                                                             |
| Height              | 99 mm                                                                               |
| Depth               | 107 mm                                                                              |

## Installation dimensions

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Installation distance right/left | 0 mm / 0 mm ( $\leq 70\text{ °C}$ )   |
| Installation distance top/bottom | 50 mm / 50 mm ( $\leq 70\text{ °C}$ ) |

## Mounting

|                         |                                                |
|-------------------------|------------------------------------------------|
| Assembly note           | alignable: horizontally 0 mm, vertically 50 mm |
| Mounting position       | horizontal DIN rail NS 35, EN 60715            |
| With protective coating | no                                             |

## Material specifications

|                  |                            |
|------------------|----------------------------|
| Housing material | Plastic                    |
| Housing material | PA                         |
| Type of housing  | Polyamide PA, color: green |

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                         |
|------------------------------------------------|-----------------------------------------|
| Degree of protection                           | IP20                                    |
| Ambient temperature (operation)                | -25 °C ... 70 °C (> +60°C derating)     |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                        |
| Climatic class                                 | 3K3 (in acc. with EN 60721)             |
| Max. permissible relative humidity (operation) | $\leq 95\%$ (at +25 °C, non-condensing) |

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| Shock                 | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                      |
| Vibration (operation) | < 15 Hz, amplitude $\pm 2.5$ mm (according to IEC 60068-2-6)<br>15 Hz ... 150 Hz, 2.3g |

## Standards and regulations

|                                                                                                                                  |                                      |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Rail applications                                                                                                                | EN 50121-4                           |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV)             |
| Standard - Electrical safety                                                                                                     | EN 60950-1/VDE 0805 (SELV)           |
| Standard - Safe isolation                                                                                                        | DIN VDE 0100-410<br>DIN VDE 0106-101 |

## Approvals

|              |                                                                                                                                            |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| CSA          | CSA-C22.2 No. 107.1-01                                                                                                                     |
| UL approvals | UL/C-UL listed UL 508<br>UL/C-UL Recognized UL 60950-1<br>UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |

## EMC data

|                                     |                                                   |
|-------------------------------------|---------------------------------------------------|
| Electromagnetic compatibility       | Conformance with EMC Directive 2014/30/EU         |
| Low Voltage Directive               | Conformance with Low Voltage Directive 2014/35/EC |
| EMC requirements for noise emission | EN 61000-6-3<br>EN 61000-6-4                      |
| EMC requirements for noise immunity | EN 61000-6-1<br>EN 61000-6-2                      |

### Noise emission

|                       |                     |
|-----------------------|---------------------|
| Standards/regulations | EN 55011 (EN 55022) |
|-----------------------|---------------------|

### Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
| Housing               | > Level 3    |

### Electrostatic discharge

|                   |                          |
|-------------------|--------------------------|
| Contact discharge | 8 kV (Contact discharge) |
| Discharge in air  | 8 kV (Air discharge)     |
| Comments          | Criterion B              |

### Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

### Electromagnetic HF field

|                     |                  |
|---------------------|------------------|
| Frequency range     | 80 MHz ... 3 GHz |
| Test field strength | 10 V/m           |
| Comments            | Criterion A      |

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|          |                                                    |
|----------|----------------------------------------------------|
| Input    | 4 kV (level 4 - asymmetrical: conductor to ground) |
| Output   | 2 kV (level 3 - asymmetrical: conductor to ground) |
| Signal   | 1 kV (Level 2 - asymmetrical cable to ground)      |
| Comments | Criterion B                                        |

## Surge voltage load (surge)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-5 |
|-----------------------|--------------|

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                 |                            |
|-----------------|----------------------------|
| Input/Output    | Level 3                    |
| Frequency range | 0.15 MHz ... 80 MHz (10 V) |

## Voltage dips

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
|-----------------------|---------------|

## Emitted interference

|                                                  |                                                                            |
|--------------------------------------------------|----------------------------------------------------------------------------|
| Standards/regulations                            | EN 61000-6-3                                                               |
| Radio interference voltage in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |
| Emitted radio interference in acc. with EN 55011 | EN 55011 (EN 55022) Class B, area of application: Industry and residential |


# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter

2320018


<https://www.phoenixcontact.com/au/products/2320018>

## Drawings

Dimensional drawing

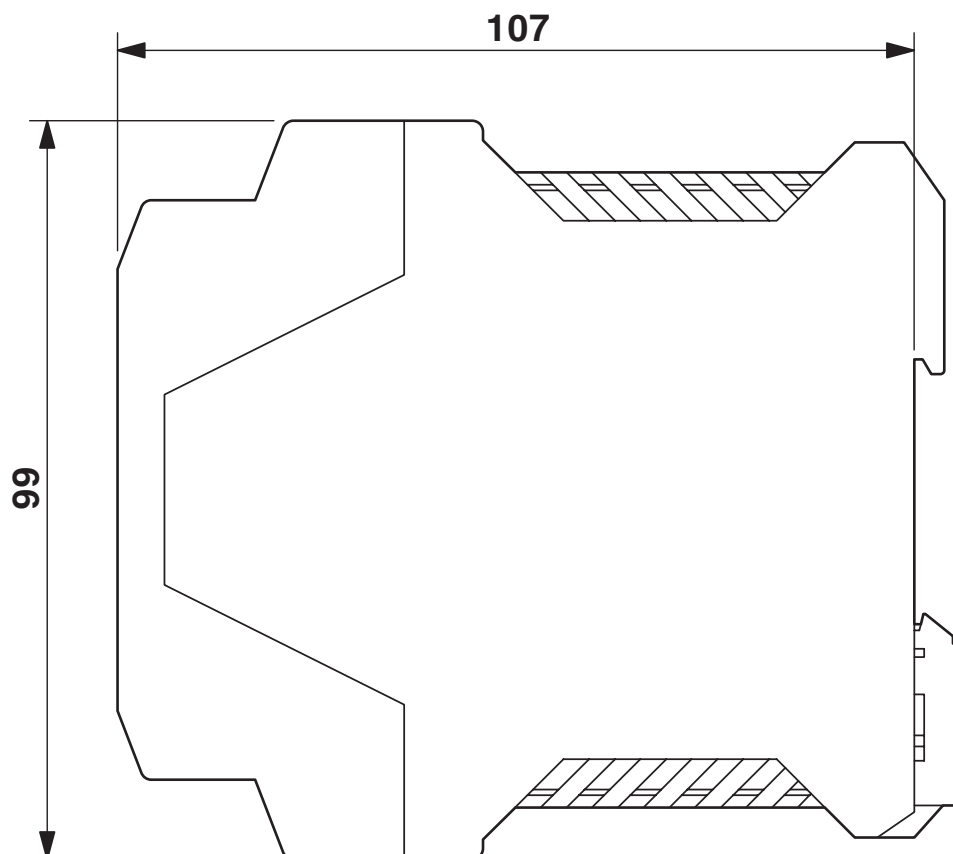

Block diagram

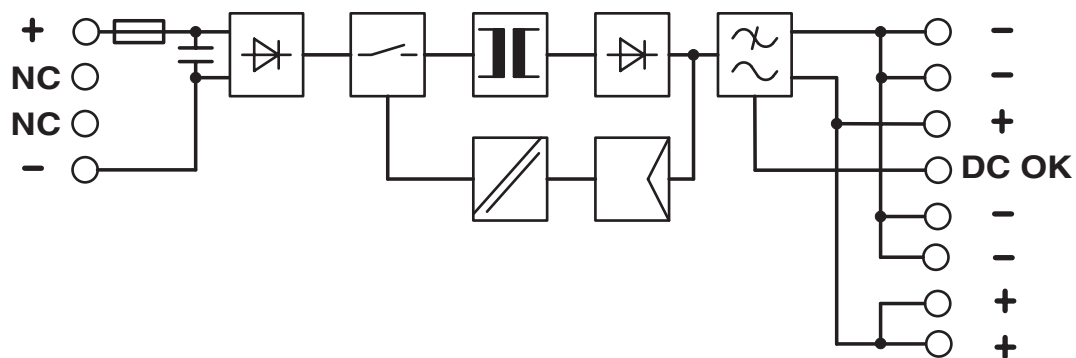

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2320018>



**cUL Recognized**  
Approval ID: FILE E 211944



**UL Recognized**  
Approval ID: E211944



**EAC**  
Approval ID: EAC-Zulassung



**EAC**  
Approval ID: RU S-DE.BL08.W.00764



**UL Listed**  
Approval ID: E123528



**cUL Listed**  
Approval ID: E123528

**CoC / Compliance Statement**  
Approval ID: 19-004-01



**cUL Listed**  
Approval ID: E199827



**UL Listed**  
Approval ID: E199827



# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27040701 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

# MINI-PS- 12- 24DC/ 5-15DC/2 - DC/DC converter



2320018

<https://www.phoenixcontact.com/au/products/2320018>

## Environmental product compliance

### EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-25                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 2350ef3a-62c5-4b86-a136-b61d660c3ebc |

### EF3.0 Climate Change

|         |              |
|---------|--------------|
| CO2e kg | 2.23 kg CO2e |
|---------|--------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)