

2700356

https://www.phoenixcontact.com/au/products/2700356

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling relay for SIL 3 high and low-demand applications, couples digital output signals to the I/O, 1 enabling current path, 1 confirmation current path, 1 digital signal output, safe state off applications, test pulse filter, fixed screw terminal block

Your advantages

- Up to SIL 3 in accordance with IEC 61508
- Force-guided contacts in accordance with EN 50205
- · Easy proof test according to IEC 61508 thanks to integrated signal contact
- · Approved for Class I, Zone 2 applications
- · Low housing width of just 6.8 mm
- · Long service life thanks to filtering of controller test pulses
- 1 enabling current path, 1 digital signal output, 1 diagnostic current path
- Couples digital output signals from failsafe controllers to I/O devices (valves, etc.) for electrical isolation and power adaptation
- Corrosion protection through protective coating on the PCB

Commercial data

Item number	2700356
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA172
Product key	DNA172
Catalog page	Page 249 (C-6-2019)
GTIN	4046356912891
Weight per piece (including packing)	164 g
Weight per piece (excluding packing)	69.773 g
Customs tariff number	85364900
Country of origin	DE



2700356

https://www.phoenixcontact.com/au/products/2700356

Technical data

Notes

Note on application	Only for industrial use
lization restriction	
CCCex note	Use in potentially explosive areas is not permitted in China.
luct properties	
Product type	Coupling relay
Product family	PSRmini
Application	Safe switch off
	High demand
	Low demand
	Ex
Control	1-channel
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3
sulation characteristics	
Overvoltage category	III
Degree of pollution	2
nes	
Typ. starting time with U _s	< 100 ms (with U _s when controlled via A1)
Typical release time	< 35 ms (when controlled via A1)
Recovery time	500 ms

Ε

Maximum power dissipation for nominal condition	$3.28 \text{ W} (I_L^2 = 36 \text{ A}^2)$
Nominal operating mode	100% operating factor
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	Safe isolation, 6 kV reinforced insulation from control circuit, start circuit, confirmation current path, signal output to the enabling current path; 4 kV/basic insulation between all current paths and housing

Supply

Сирріу	
Designation	A1/A2
Rated control circuit supply voltage U _S	20.4 V DC 26.4 V DC
Rated control circuit supply voltage U _S	24 V DC -15 % / +10 %
Rated control supply current I _S	typ. 45 mA
Power consumption at U _S	typ. 1.08 W
Inrush current	typ. 400 mA (Δt < 10 μs at U_s)
Filter time	max. 2 ms (at A1-A2; test pulse width)



2700356

https://www.phoenixcontact.com/au/products/2700356

	≥ 100 ms (at A1-A2; test pulse rate)
Protective circuit	Serial protection against polarity reversal; Suppressor diode 33 \
Supply	
Designation	21/A2
Diagnostic supply voltage U _D	24 V DC -15 % / +10 %
Input current at U _D	6 mA (at 21-A2 for U_D ; depending on load + 100 mA at M1 and 22)
Inrush current at U _D	typ. 2.5 A (Δt < 20 μs at U _D)
Protective circuit	Serial protection against polarity reversal; Suppressor diode 38 V

Output data

Relay: Enabling current path (13/14)

Output description	2 N/O contacts in series, without delay, floating
Number of outputs	1 (safety-related)
Contact switching type	1 enabling current path
Contact material	AgSnO ₂
Switching voltage	min. 12 V AC/DC
	max. 250 V AC/DC
Switching capacity	min. 60 mW
Inrush current	min. 3 mA
	max. 6 A
Limiting continuous current	6 A (High demand)
	4 A (Low demand)
Sq. Total current	36 A ² (observe derating)
Switching frequency	max. 0.1 Hz
Mechanical service life	10x 10 ⁶ cycles
Output fuse	6 A gL/gG
	4 A gL/gG (for low-demand applications)

Relay: Confirmation current path (21/22)

Output description	2 N/C contacts in series, without delay, not floating (reference ground: A2)
Number of outputs	1 (safety-related)
Contact switching type	1 confirmation current path
Contact material	AgCuNi, + Au
Switching voltage	min. 20.4 V DC
	max. 26.4 V DC
Switching capacity	min. 20 mW
Inrush current	min. 1 mA
	max. 100 mA
Limiting continuous current	100 mA
Switching frequency	max. 0.1 Hz
Mechanical service life	10x 10 ⁶ cycles
Output fuse	150 mA Fast-blow



2700356

https://www.phoenixcontact.com/au/products/2700356

Signal:	M1
---------	----

Output description	PNP
Number of outputs	1 (non-safety-related)
Voltage	approx. 22 V DC (U _D - 2 V)
Current	max. 100 mA
Maximum inrush current	500 mA (Δt = 1 ms at U _s)
Short-circuit protection	no
Output fuse	150 mA fast blow

Connection data

Connection technology

pluggable	no

Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm ² 2.5 mm ²
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross-section AWG	26 12
Stripping length	12 mm
Screw thread	M3
Tightening torque	0.5 Nm 0.6 Nm

Signaling

Status display	2 x LED (green)
Operating voltage display	1 x LED (yellow)
Error indication	1 x LED (red)

Dimensions

Width	6.8 mm
Height	93.1 mm
Depth	102.5 mm

Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	PBT

Characteristics

Sa	fetv	da	ta

Salety data		
Stop category	0	
Safety data: EN 50156		
Safety Integrity Level (SIL)	3	

Safety data: IEC 61508 - High demand



2700356

https://www.phoenixcontact.com/au/products/2700356

Safety Integrity Level (SIL)	3	
Safety data: IEC 61508 - Low demand		
Safety Integrity Level (SIL)	3	

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-40 °C 70 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz 150 Hz, 2g

Approvals

ATEX

DNV

Identification	
Certificate	UL 22 ATEX 2912X
IECEx	
Identification	Ex ec nC IIC T4 Gc
Certificate	IECEx UL 22.0037X
UL, USA/Canada	
Identification	cULus
Certificate	E140324
UL Ex, USA / Canada	
Identification	Class I, Zone 2, AEx ec nC IIC T4 / Ex ec nC IIC Gc T4 X
	Class I, Div. 2, Groups A, B, C, D, T4
Certificate	E360692
CE	
Identification	CE-compliant
Environmental simulation test	
Identification	G3
Certificate	ISA-S71.04
CCC / China-Ex	
Identification	Ex ec nC IIC T4 Gc
Certificate	2022122304115695



2700356

https://www.phoenixcontact.com/au/products/2700356

Assembly note

Mounting position

Identification	C	C, EMC2
Certificate	1	11253-14 HH
Mounting		
Mounting type		DIN rail mounting

See derating curve


vertical, horizontal, with front of module upward




2700356

https://www.phoenixcontact.com/au/products/2700356

Drawings

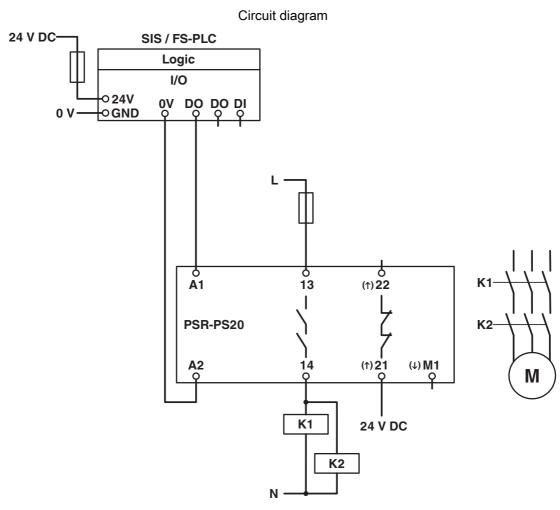

Example application

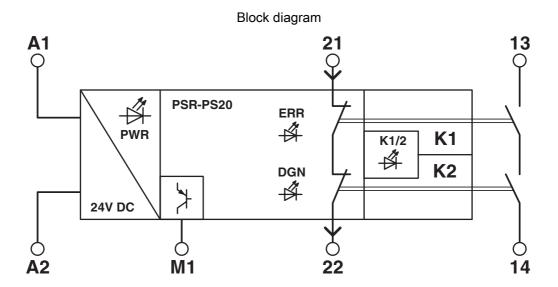

Block diagram



2700356

https://www.phoenixcontact.com/au/products/2700356

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/au/products/2700356




DNV GL

Approval ID: TAA00002VZ



Functional Safety





Functional Safety

Approval ID: 44 205 13755205



cULus Listed

Approval ID: E140324



ECEx

Approval ID: IECEx ULD 22.0037X



ATEX

Approval ID: UL 22 ATEX 2912X



cULus Listed

Approval ID: E360692



CCC

Approval ID: 2022122304115695



2700356

https://www.phoenixcontact.com/au/products/2700356

Classifications

_			_
	വ	ΛΟ	ľ
-		Α.	١.٦

	ECLASS-13.0	27371819
Εī	ГІМ	
	ETIM 9.0	EC001449
U	NSPSC	
	UNSPSC 21.0	39122200



2700356

https://www.phoenixcontact.com/au/products/2700356

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-l
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c1b16ea8-35eb-4ce7-b131-533eac3d3e32

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT PTY Ltd Unit 7, 2-8 South Street Rydalmere NSW 2116 1300 786 411 customerservice@phoenixcontact.com.au