

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402

<https://www.phoenixcontact.com/au/products/2701402>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Antenna cable for control cabinet feed-through, outside diameter: 3.2 mm (0.126 in.), inner conductor: stranded, attenuation: 0.6 / 0.9 / 1.4 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (female) -> RSMA (male), cable length: 0.5 m (1.6 ft.)



Your advantages

- Halogen-free
- Flame-retardant
- UV resistant
- Oil-resistant
- For outdoor installation

Commercial data

Item number	2701402
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNN2Z2
Product key	DNN2Z2
Catalog page	Page 391 (C-6-2019)
GTIN	4046356746816
Weight per piece (including packing)	55 g
Weight per piece (excluding packing)	52.7 g
Customs tariff number	85442000
Country of origin	PL

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402
<https://www.phoenixcontact.com/au/products/2701402>

Technical data

Notes

Note on application	
Note on application	Only for industrial use

Product properties

Product type	Coaxial cable
--------------	---------------

Electrical properties


Frequency range	0.3 GHz ... 6 GHz
Impedance	50 Ω

Connection data

Connector connection	
Connection method	RSMA (male)

Connector connection	
Connection method	N (female)

Dimensions

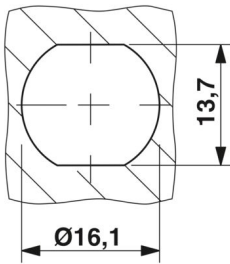Dimensional drawing	
Hole diameter	16.1 mm

Material specifications

Outer sheath, material	RADOX®(LSFH)
------------------------	--------------

Cable/line

Cable length	0.5 m
Cable type	EF 316
External cable diameter	2.50 mm
Outer sheath, material	RADOX®(LSFH)
External sheath, color	blue
Bending radius, long-term	12.50 mm
868 / 900 MHz	~ 0.6 dB (Attenuation of entire cable)
2.4 GHz	~ 0.9 dB (Attenuation of entire cable)

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402

<https://www.phoenixcontact.com/au/products/2701402>

5.8 GHz	~ 1.4 dB (Attenuation of entire cable)
Resistance to oil	very good oil and chemical resistance

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 105 °C
Ambient temperature (storage/transport)	-40 °C ... 105 °C
Ambient temperature (assembly)	-20 °C ... 60 °C
Resistance to oil	very good oil and chemical resistance

Approvals

CE

Certificate	CE-compliant
-------------	--------------

Standards and regulations


Resistance to oil	very good oil and chemical resistance
Standard designation	Flame retardancy
Standards/specifications	DIN EN 60332-1-2
	UL 1581
Standard designation	Halogen-free
Standards/specifications	IEC 60754
Standard designation	UV resistance
Standards/specifications	IEC 60068-2-5

Mounting

Assembly note	Outdoors and indoors
---------------	----------------------

Drawings

Dimensional drawing

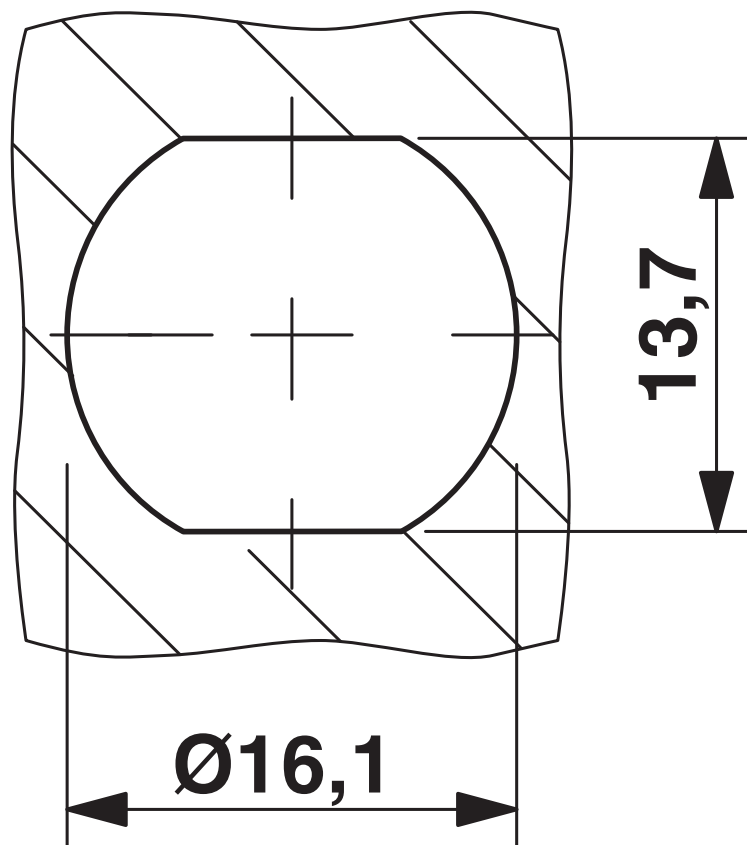

Drill holes

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402

<https://www.phoenixcontact.com/au/products/2701402>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2701402>



EAC

Approval ID: 19060508

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402

<https://www.phoenixcontact.com/au/products/2701402>

Classifications

ECLASS

ECLASS-13.0	27060310
-------------	----------

ETIM

ETIM 9.0	EC001682
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

RAD-PIG-EF316-N-RSMA - Antenna cable



2701402

<https://www.phoenixcontact.com/au/products/2701402>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(b)-II, 6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-25
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b87a90b6-16c7-43c0-8dea-7ac532134310

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au