

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline, Analog output terminal, Analog outputs: 2, 0 V ... 10 V, 0 mA ... 20 mA, 4 mA ... 20 mA, connection technology: 2-conductor, transmission speed in the local bus: 500 kbps, degree of protection: IP20, including Inline connectors and marking fields

Product description

The terminal is designed for use within an Inline station. It is used to output analog current and voltage signals. The signals are available with a 16-bit resolution.

Your advantages

- 2 analog output channels
- Connection of actuators in 2-conductor technology
- Voltage range: 0 V ... 10 V
- Current ranges: 0 mA ... 20 mA, 4 mA ... 20 mA
- Output values can be represented in two different formats
- Behavior of the outputs in the event of an error can be configured
- Process data update including conversion time of the digital/analog converter < 1 ms

Commercial data

Item number	2863083
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI142
Product key	DRI142
Catalog page	Page 142 (C-6-2019)
GTIN	4017918917104
Weight per piece (including packing)	234.6 g
Weight per piece (excluding packing)	190 g
Customs tariff number	85389099
Country of origin	DE

IB IL AO 2/SF-PAC - Analog module


2863083

<https://www.phoenixcontact.com/au/products/2863083>



Technical data

Dimensions

Dimensional drawing		
Width		48.8 mm
Height		135 mm
Depth		71.5 mm
Note on dimensions		Housing dimensions

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Utilization restriction

CCCex note	Use in potentially explosive areas is not permitted in China.
------------	---

Interfaces

Inline local bus

Number of interfaces	2
Connection method	Inline data jumper
Transmission speed	500 kbps

System properties

Module

ID code (dec.)	91
ID code (hex)	5B
Length code (hex)	02
Length code (dec)	02
Process data channel	32 bit
Input address area	4 Byte
Output address area	4 Byte
Register length	32 bit
Required parameter data	6 Byte
Required configuration data	5 Byte

Output data

Analog:

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Output name	Analog outputs
Connection technology	2-conductor
Note regarding the connection technology	shielded
Number of outputs	2
D/A converter resolution	16 bit
Protective circuit	Transient protection of outputs Short-circuit protection of outputs
Representation of output values	16 bits (15 bits + sign)
DAC resolution	16 bit
Process data update	< 1 ms
Current output signal	0 mA ... 20 mA 4 mA ... 20 mA
Load/output load current output	$\leq 500 \Omega$
Voltage output signal	0 V ... 10 V
Load/output load voltage output	$\geq 2 \text{ k}\Omega$

Product properties

Product type	I/O component
Product family	Inline
Type	modular
Scope of supply	including Inline connectors and marking fields
Operating mode	Process data mode with two words
Diagnostics messages	I/O supply failure I/O error message sent to the bus coupler

Insulation characteristics

Overvoltage category	II (IEC 60664-1, EN 60664-1)
Pollution degree	2 (IEC 60664-1, EN 60664-1)

Electrical properties

Maximum power dissipation for nominal condition	2.6 W
---	-------

Potentials: Communications power (U_L)

Supply voltage	7.5 V DC (via voltage jumper)
Current draw	max. 45 mA typ. 36 mA

Potentials: Supply of analog modules (U_{ANA})

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 95 mA typ. 75 mA

Electrical isolation/isolation of the voltage ranges

Test voltage: 7.5 V supply (bus logic), 24 V supply U_{ANA} / I/O	500 V AC, 50 Hz, 1 min
Test voltage: 7.5 V supply (bus logic), 24 V supply U_{ANA} / functional ground	500 V AC, 50 Hz, 1 min

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Test voltage: 24 V supply (I/O) / functional ground

500 V AC, 50 Hz, 1 min

Connection data

Connection technology

Connection name

Inline connector

Conductor connection

Connection method

Spring-cage connection

Conductor cross section rigid

0.08 mm² ... 1.5 mm²

Conductor cross section flexible

0.08 mm² ... 1.5 mm²

Conductor cross section AWG

28 ... 16

Stripping length

8 mm

Inline connector

Connection method

Spring-cage connection

Conductor cross section, rigid

0.08 mm² ... 1.5 mm²

Conductor cross section, flexible

0.08 mm² ... 1.5 mm²

Conductor cross section AWG

28 ... 16

Stripping length

8 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)

-25 °C ... 55 °C

Degree of protection

IP20

Air pressure (operation)

70 kPa ... 106 kPa (up to 3000 m above sea level)

Air pressure (storage/transport)

70 kPa ... 106 kPa (up to 3000 m above sea level)

Ambient temperature (storage/transport)

-25 °C ... 85 °C

Permissible humidity (operation)

10 % ... 95 % (non-condensing)

Permissible humidity (storage/transport)

10 % ... 95 % (non-condensing)

Standards and regulations

Protection class

III (IEC 61140, EN 61140, VDE 0140-1)


Mounting

Mounting type


DIN rail mounting

Drawings

Dimensional drawing

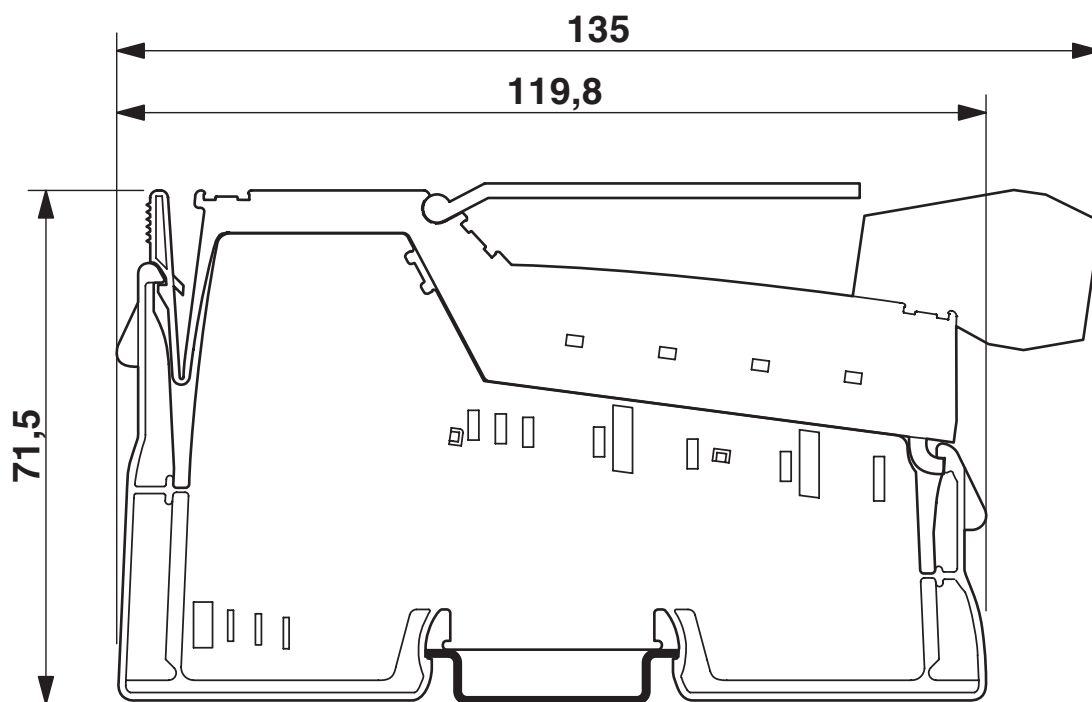

Connection diagram

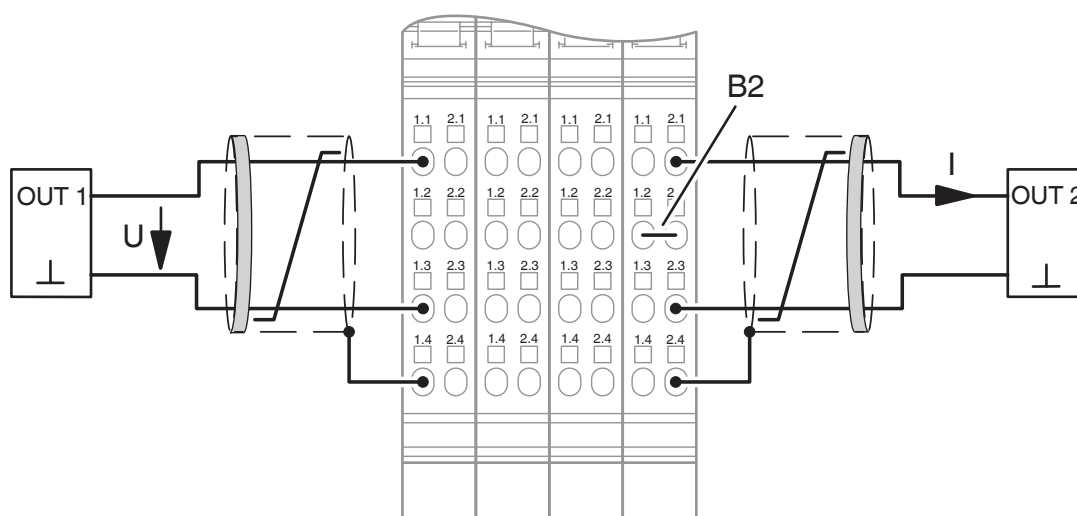


IB IL AO 2/SF-PAC - Analog module

2863083

<https://www.phoenixcontact.com/au/products/2863083>



Block diagram

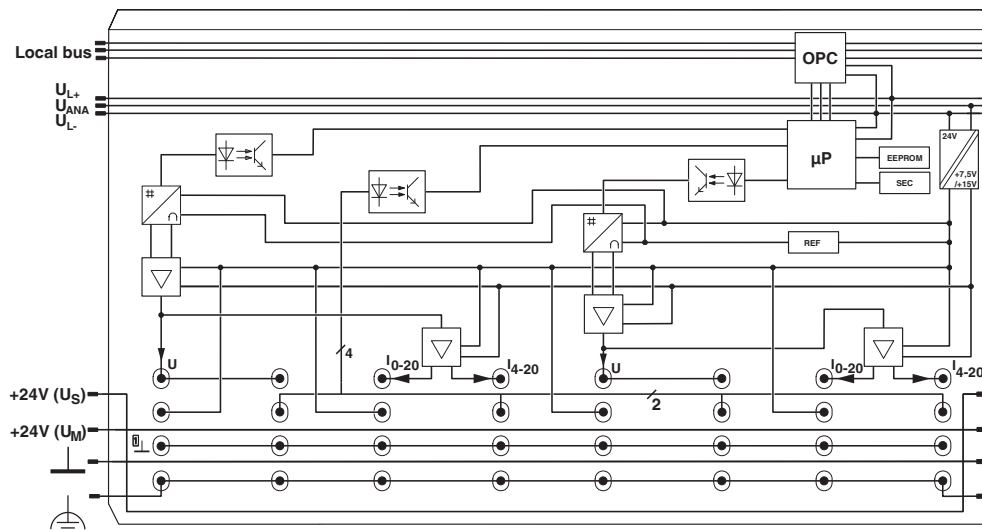

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2863083>



DNV GL

Approval ID: TAA00000BN



BV

Approval ID: 20977/C0 BV

BSH

Approval ID: 658a



RINA

Approval ID: ELE121121XG

ABS

Approval ID: 22-2226444-PDA



cULus Recognized

Approval ID: E140324



LR

Approval ID: LR23398855TA



cUL Listed

Approval ID: E256199



UL Listed

Approval ID: E256199



cULus Listed

Approval ID: E199827

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Classifications

ECLASS

ECLASS-13.0	27242601
-------------	----------

ETIM

ETIM 9.0	EC001596
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

IB IL AO 2/SF-PAC - Analog module



2863083

<https://www.phoenixcontact.com/au/products/2863083>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	05a70494-6ebe-4194-a771-484a50280449

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au