

FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch panel, one RJ45 jack to 8 screw connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via jumpers

Product description

Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

Your advantages

- Safe shield connection to ground potential
- CAT5e
- Mounting on a DIN rail
- 10/100/1000 Mbps
- Optional shield connection via jumpers
- Shipbuilding approval in accordance with DNV GL
- PoE-capable in accordance with IEEE 802.3bt, type 4

Commercial data

Item number	2901643
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	DNC331
Product key	DNC331
Catalog page	Page 363 (C-6-2019)
GTIN	4046356623391
Weight per piece (including packing)	56.85 g
Weight per piece (excluding packing)	58.08 g
Customs tariff number	85366990
Country of origin	DE

FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Utilization restriction

CCCex note	Use in potentially explosive areas is not permitted in China.
------------	---

Product properties

Product type	Patch panel
MTBF	6702 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	2962 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

Connection data

Connection method	Screw connection
-------------------	------------------

Interfaces

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Serial transmission speed	10/100/1000 Mbps
Connection method	Screw connection
No. of channels	1
Tightening torque	0.22 Nm ... 0.25 Nm
Pin assignment	1:1
Transmission length	100 m (including patch cables)
Single conductor/terminal point, rigid	0.14 mm ² ... 1.5 mm ²
Single-wire/terminal point, flexible	0.14 mm ² ... 1 mm ²
Single-wire/terminal point, rigid AWG max.	16
Single-wire/terminal point, rigid AWG min.	26

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Connection method	RJ45 CAT5e
No. of channels	1


Dimensions

FL-PP-RJ45-SC - Patch panel

2901643

<https://www.phoenixcontact.com/au/products/2901643>



Dimensional drawing	
Width	29 mm
Height	90 mm
Depth	53 mm

Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PVC / PA

Cable/line

External cable diameter	6 mm ... 10 mm
Cable impedance	100 Ω

Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	≤ 2500

Mechanical tests

Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6	: 5g, 10...150 Hz, 2.5 h, in XYZ direction
Shock in accordance with EN 60068-2-27/IEC 60068-2-27	: 25g, 11 ms period, half-sine shock pulse

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Ambient temperature (assembly)	-10 °C ... 70 °C
Permissible humidity (operation)	25 % ... 95 % (non-condensing)

Approvals

ATEX	
Identification	Ⓔ II 3 G Ex ec IIC Gc
Certificate	PxCIF14ATEX2901642U
Note	Please follow the special installation instructions in the documentation!

UKEX	
------	--

FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Identification	II 3 G Ex ec IIC Gc
Certificate	PxCIMA21UKEX2901642U

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

Shipbuilding

Identification	DNV GL
----------------	--------

Shipbuilding data

Temperature	B
Humidity	A
Vibration	A
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

FL-PP-RJ45-SC - Patch panel


2901643

<https://www.phoenixcontact.com/au/products/2901643>



Drawings

Dimensional drawing

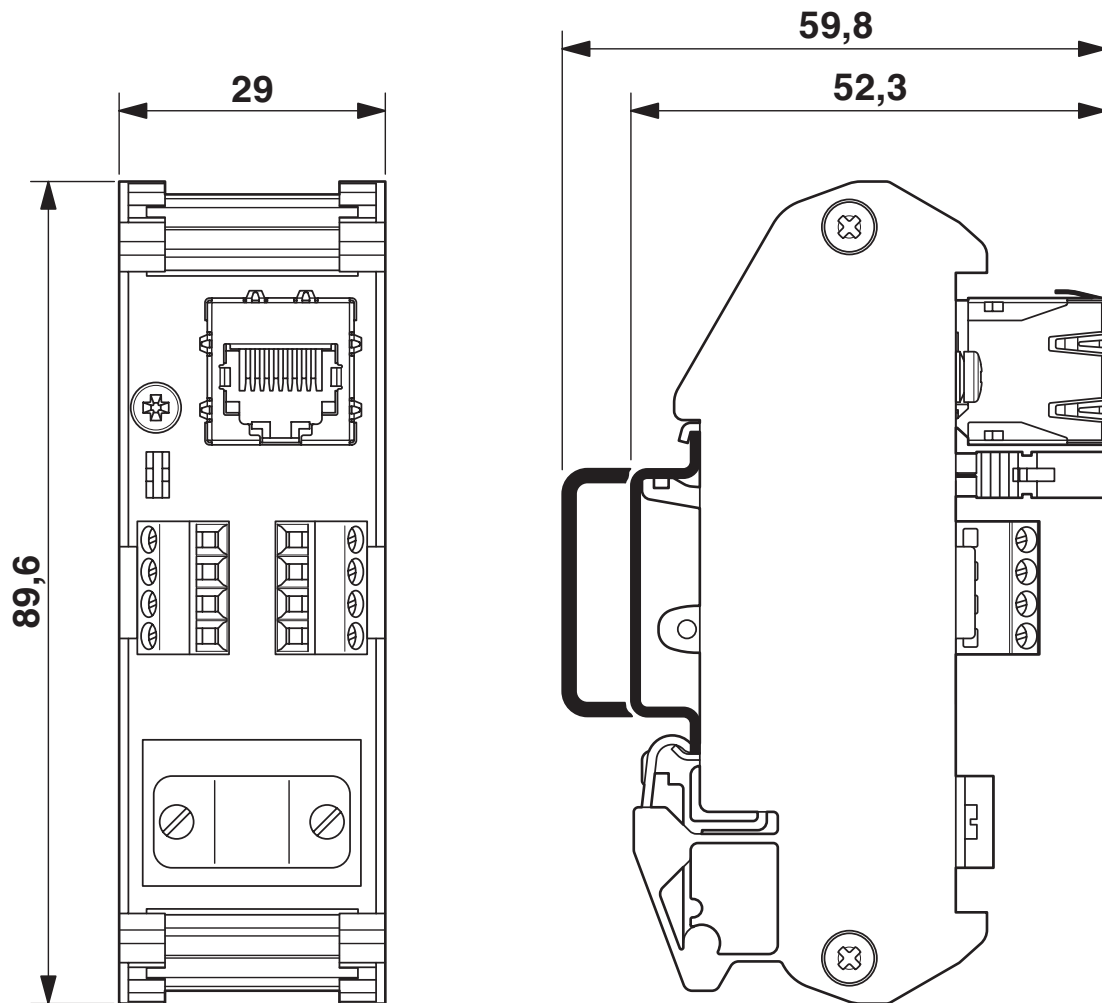

Dimensional drawing


FL-PP-RJ45-SC - Patch panel

2901643

<https://www.phoenixcontact.com/au/products/2901643>




Schematic diagram

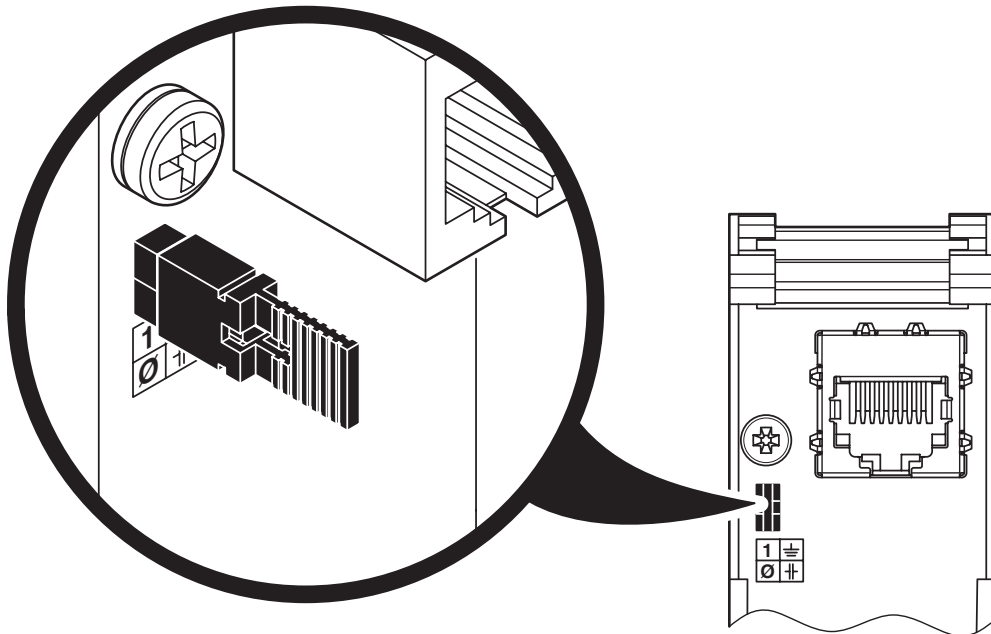

Shield connection direct to PE

Schematic diagram

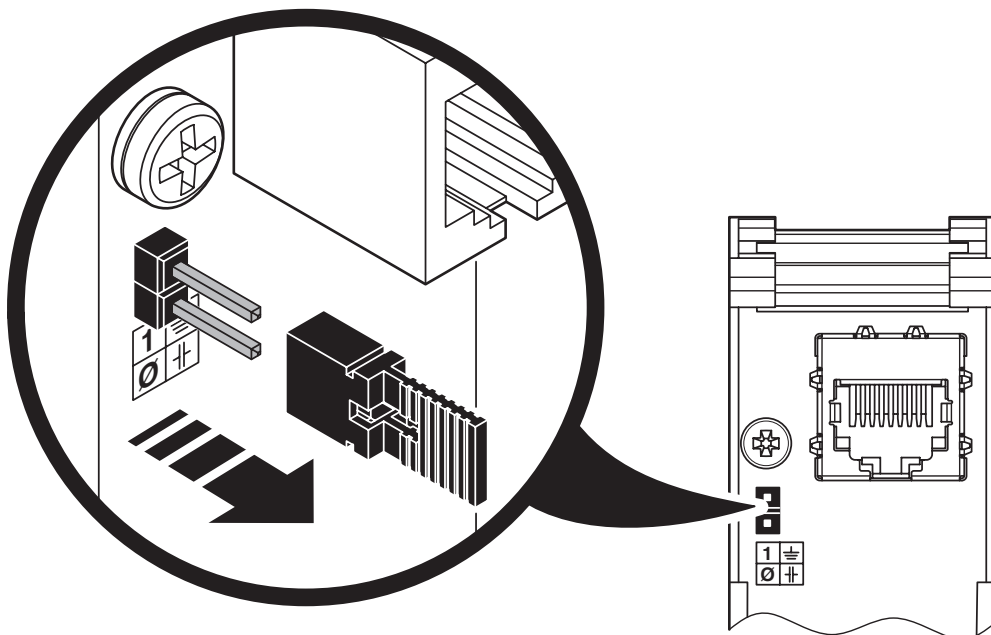

Shield connection to PE via RC element


FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Circuit diagram

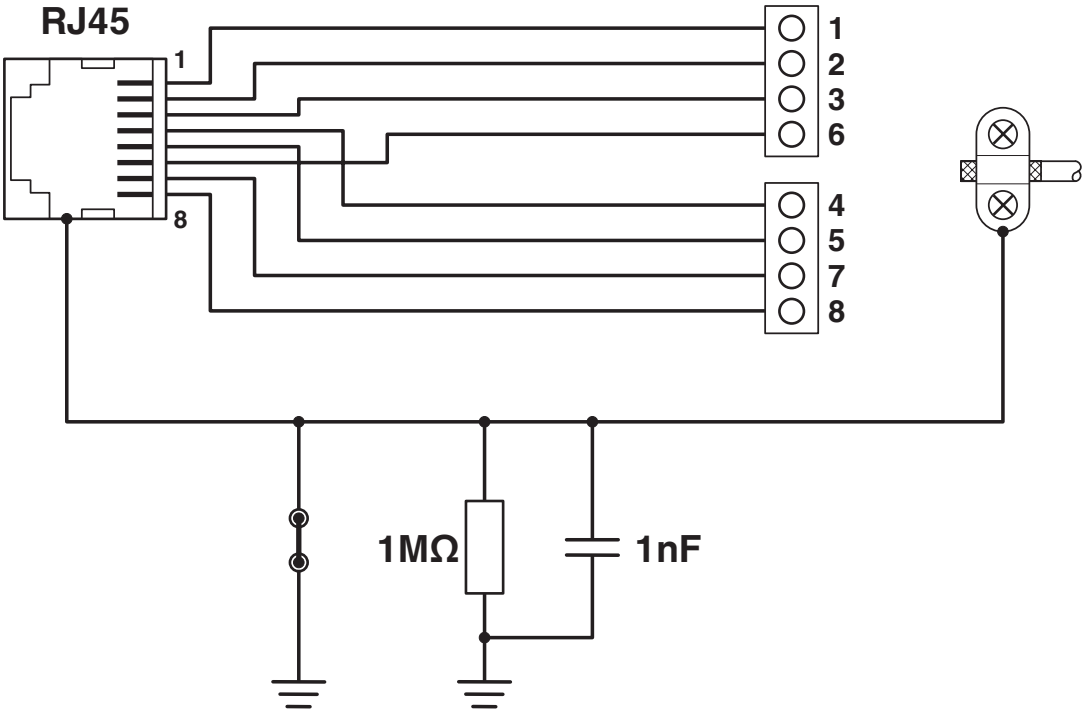

Circuit diagram

FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Approvals

💡 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2901643>



DNV GL

Approval ID: TAA00001KR

FL-PP-RJ45-SC - Patch panel



2901643

<https://www.phoenixcontact.com/au/products/2901643>

Classifications

ECLASS

ECLASS-13.0	19170112
-------------	----------

ETIM

ETIM 9.0	EC001128
----------	----------

UNSPSC

UNSPSC 21.0	43223309
-------------	----------

FL-PP-RJ45-SC - Patch panel



2901643
<https://www.phoenixcontact.com/au/products/2901643>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au