

FL-PP-RJ45-LSA - Patch panel

2901645

<https://www.phoenixcontact.com/au/products/2901645>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch panel, one RJ45 jack to 8 LSA connection terminal blocks (1:1 assignment), CAT5e, 10/100/1000 Mbps, DIN rail adapter, IP20, option of shield contacting to the DIN rail via bridges

Product description

Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

Your advantages

- Safe shield connection to ground potential
- CAT5e
- Mounting on a DIN rail
- 10/100/1000 Mbps
- Optional shield connection via jumpers
- Shipbuilding approval in accordance with DNV GL
- PoE-capable in accordance with IEEE 802.3bt, type 4

Commercial data

Item number	2901645
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	DNC331
Product key	DNC331
Catalog page	Page 363 (C-6-2019)
GTIN	4046356622790
Weight per piece (including packing)	54.218 g
Weight per piece (excluding packing)	56 g
Customs tariff number	85366990
Country of origin	DE

FL-PP-RJ45-LSA - Patch panel

2901645

<https://www.phoenixcontact.com/au/products/2901645>



Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Patch panel
MTBF	6702 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day)) 2962 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

Connection data

Connection method	LSA-PLUS
-------------------	----------

Interfaces


Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Serial transmission speed	10/100/1000 Mbps
Connection method	LSA
No. of channels	1
Pin assignment	1:1
Transmission length	100 m (including patch cables)
Single conductor/terminal point, rigid	0.128 mm² ... 0.325 mm²
Single-wire/terminal point, flexible	0.128 mm² ... 0.325 mm²
Single-wire/terminal point, rigid AWG max.	22
Single-wire/terminal point, rigid AWG min.	26

Data: Ethernet interface, 10/100/1000Base-T(X) in accordance with IEEE 802.3

Connection method	RJ45 CAT5e
No. of channels	1

Dimensions

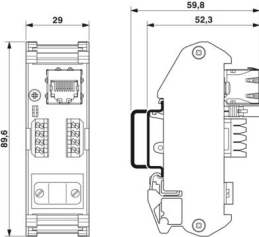Dimensional drawing	
Width	29 mm
Height	90 mm
Depth	53 mm

FL-PP-RJ45-LSA - Patch panel



2901645

<https://www.phoenixcontact.com/au/products/2901645>

Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PVC / PA

Cable/line

External cable diameter	6 mm ... 10 mm
Cable impedance	100 Ω

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≤ 2500
-----------------------------	--------

Mechanical tests

Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6	: 5g, 10...150 Hz, 2.5 h, in XYZ direction
Shock in accordance with EN 60068-2-27/IEC 60068-2-27	: 25g, 11 ms period, half-sine shock pulse

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Ambient temperature (assembly)	-10 °C ... 70 °C
Permissible humidity (operation)	25 % ... 95 % (non-condensing)

Approvals

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

Shipbuilding

Identification	DNV GL
----------------	--------

Shipbuilding data

Temperature	B
Humidity	A
Vibration	A
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

FL-PP-RJ45-LSA - Patch panel


2901645

<https://www.phoenixcontact.com/au/products/2901645>



Drawings

Dimensional drawing

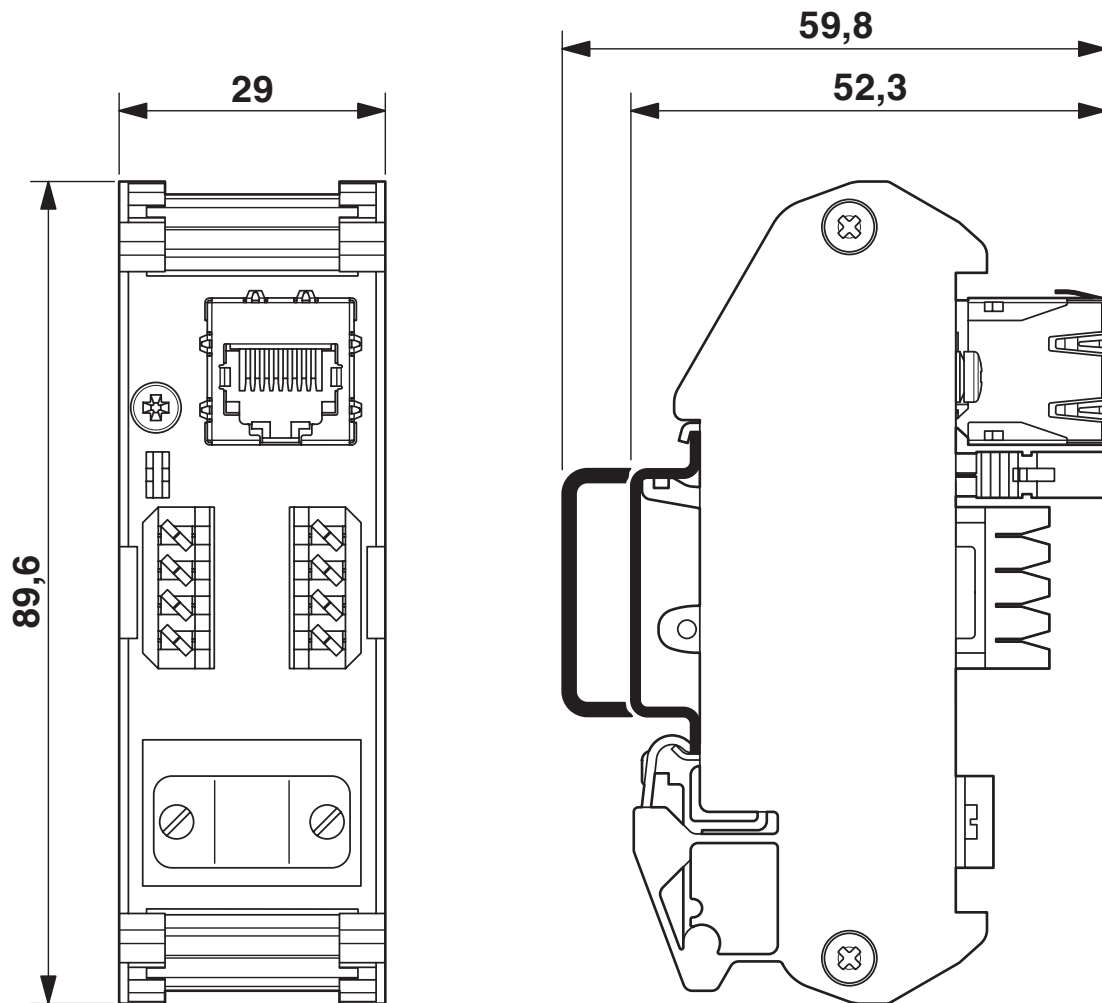

Dimensional drawing


FL-PP-RJ45-LSA - Patch panel

2901645

<https://www.phoenixcontact.com/au/products/2901645>




Schematic diagram

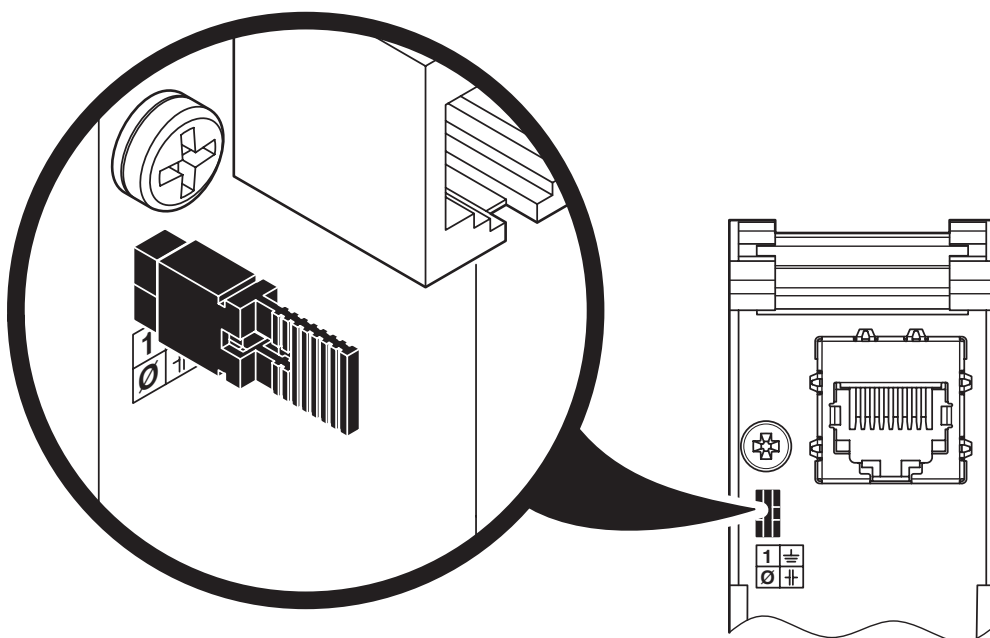

Shield connection direct to PE

Schematic diagram

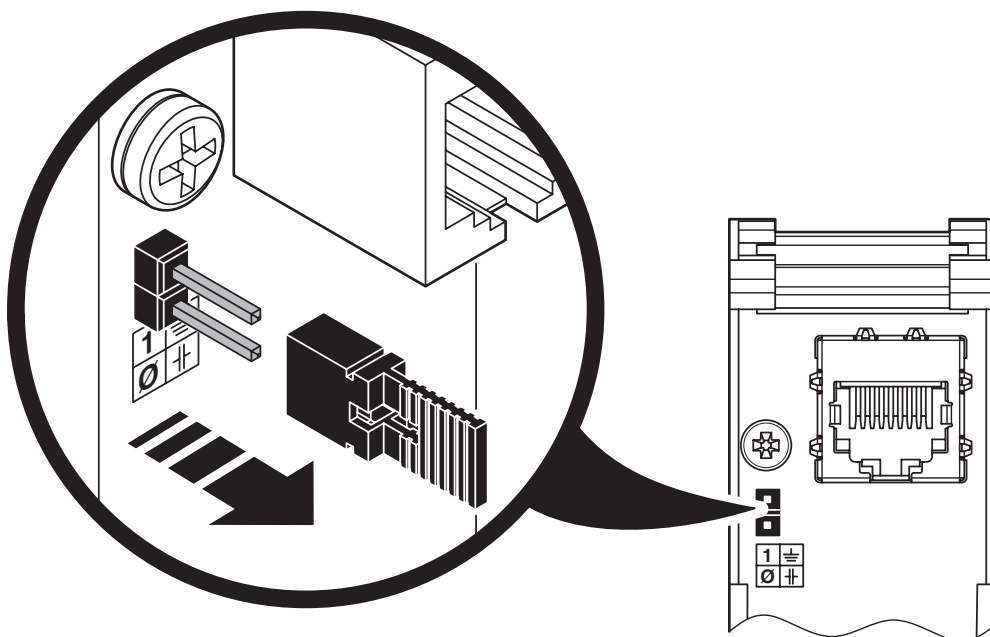

Shield connection to PE via RC element


FL-PP-RJ45-LSA - Patch panel

2901645

<https://www.phoenixcontact.com/au/products/2901645>



Circuit diagram

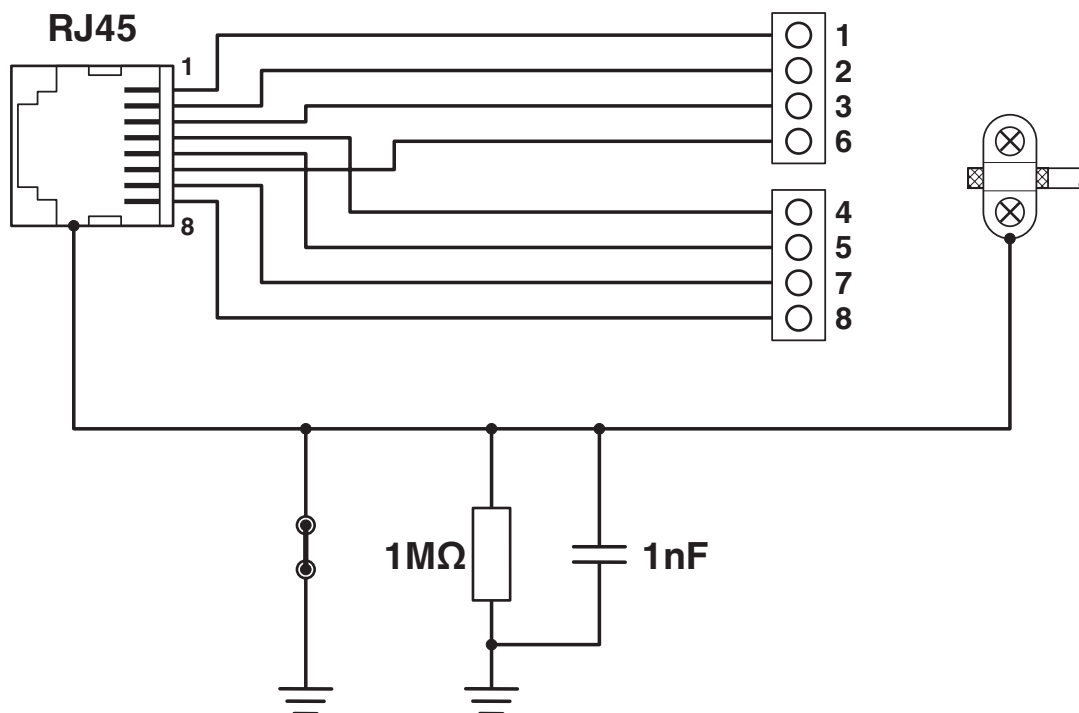

Circuit diagram

FL-PP-RJ45-LSA - Patch panel



2901645

<https://www.phoenixcontact.com/au/products/2901645>

Approvals

💡 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2901645>



DNV GL

Approval ID: TAA00001KR

FL-PP-RJ45-LSA - Patch panel



2901645

<https://www.phoenixcontact.com/au/products/2901645>

Classifications

ECLASS

ECLASS-13.0	19170112
-------------	----------

ETIM

ETIM 9.0	EC001128
----------	----------

UNSPSC

UNSPSC 21.0	43223300
-------------	----------

FL-PP-RJ45-LSA - Patch panel



2901645

<https://www.phoenixcontact.com/au/products/2901645>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(a), 6(a)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7e723a5b-d08f-4e52-9bac-d5e50ee4f7c0

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au