

RAD-DO8-IFS - I/O extension module



2902811
<https://www.phoenixcontact.com/au/products/2902811>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Radioline - I/O extension module, 8 digital transistor outputs (30.5 V DC/200 mA)

Your advantages

- Easy startup via thumbwheel
- Channel-to-channel electrical isolation
- Extended temperature range of -40 °C ... +70 °C
- Easy module replacement even during operation (hot swap)
- 8 transistor outputs (30.5 V DC/200 mA)
- Approved for use in zone 2

Commercial data

Item number	2902811
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNC61D
Product key	DNC61D
Catalog page	Page 381 (C-6-2019)
GTIN	4046356681544
Weight per piece (including packing)	178.77 g
Weight per piece (excluding packing)	128.56 g
Customs tariff number	85177900
Country of origin	DE

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Set consists of

ME 17,5 TBUS 1,5/ 5-ST-3,81 KMGY - DIN rail bus connector

2713645

<https://www.phoenixcontact.com/au/products/2713645>



DIN rail bus connector, color: light gray, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-17,5..., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting method: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Extension module
MTTF	1594 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	600 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	230 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Rated insulation voltage	60 V (In accordance with EN/IEC 60079-7)
Electrical isolation	50 V (Rated insulation voltage (in each case between channel groups 1...4 and 5...8 / TBUS supply, reinforced insulation in accordance with EN 61010))
	300 V (Rated insulation voltage (to adjacent devices, basic insulation in accordance with EN/IEC 61010))
Test voltage for digital I/Os	1.5 kV AC (50 Hz, 1 min.)
Maximum power dissipation for nominal condition	0.528 W
Transient surge protection	yes

Supply

Supply voltage range	19.2 V DC ... 30.5 V DC (DIN rail bus connector)
Max. current consumption	≤ 22 mA (At 24 V DC, at 25°C)

Output data

Digital

Output name	Transistor output, active
Number of outputs	8
Contact switching type	Transistor
Supply voltage range	12 V DC ... 30.5 V DC (for digital outputs)
Maximum switching voltage	30.5 V DC
Max. switching current	0.2 A (per channel)
Output current when switched off	≤ 300 µA
Output voltage when switched off	≤ 2 V
Maximum switching frequency	10 Hz

RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>



Behavior of the outputs (adjustable via DIP switch)	Hold / Reset
---	--------------


Connection data

Tightening torque	0.5 Nm ... 0.6 Nm
	5 lbf·in. ... 7 lbf·in.
Connection method	Screw connection
Stripping length	7 mm
Conductor cross section, rigid min.	0.2 mm²
Conductor cross section, rigid max.	2.5 mm²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

Signaling

Status display	LED supply voltage, PWR (green)
	Green LED (bus communication, DAT)
	LED periphery error, ERR (red)
	Yellow LED (digital output, DO1)
	Yellow LED (digital output, DO2)
	Yellow LED (digital output, DO3)
	Yellow LED (digital output, DO4)
	Yellow LED (digital output, DO5)
	Yellow LED (digital output, DO6)
	Yellow LED (digital output, DO7)
	Yellow LED (digital output, DO8)

Dimensions

Dimensional drawing	
Width	17.5 mm
Height	113 mm
Depth	114.5 mm

Material specifications

Color (Housing)	gray (RAL 7042)
Material (Housing)	PA 6.6-FR
Flammability rating according to UL 94	V0

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
	-40 °F ... 158 °F
Ambient temperature (storage/transport)	-40 °C ... 85 °C
	-40 °F ... 185 °F
Altitude	2000 m
Permissible humidity (operation)	20 % ... 85 %
Permissible humidity (storage/transport)	20 % ... 85 %
Shock	16g, 11 ms
Vibration (operation)	in accordance with IEC 60068-2-6: 5g, 10 Hz ... 150 Hz

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	Ⓔ II 3 G Ex ec IIC T4 Gc
Certificate	IBExU 15 ATEX B008 X
Note	Please follow the special installation instructions in the documentation!

IECEx

Identification	Ex ec IIC T4 Gc
Certificate	IECEx IBE 13.0019X

EAC Ex

Identification	2Ex nA nC IIC T4 Gc X
Certificate	RU C-DE.HB49.B.00033/20

UL, USA/Canada

Identification	508 Listed
	Class I, Div. 2, Groups A, B, C, D T4A
	Class I, Zone 2, IIC T4

CCC / China-Ex

Identification	Ex ec IIC T4 Gc
Certificate	2022122310115625

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Noise immunity	EN 61000-6-2
----------------	--------------

Noise emission

Standards/regulations	EN 61000-6-4
-----------------------	--------------

Standards and regulations

Standard designation	EMC Directive 2014/30/EU
Standards/specifications	EN 61000-6-2
Standard designation	EMC Directive 2014/30/EU
Standards/specifications	EN 61000-6-4
Standard designation	Ex Directive (ATEX)
Standards/specifications	EN 60079-0
Standard designation	Ex Directive (ATEX)
Standards/specifications	EN 60079-15

Mounting

Mounting type	DIN rail mounting
Assembly note	on standard DIN rail NS 35 in accordance with EN 60715
Mounting position	any

RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>



Drawings

Dimensional drawing



Slim design


RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>




Application drawing

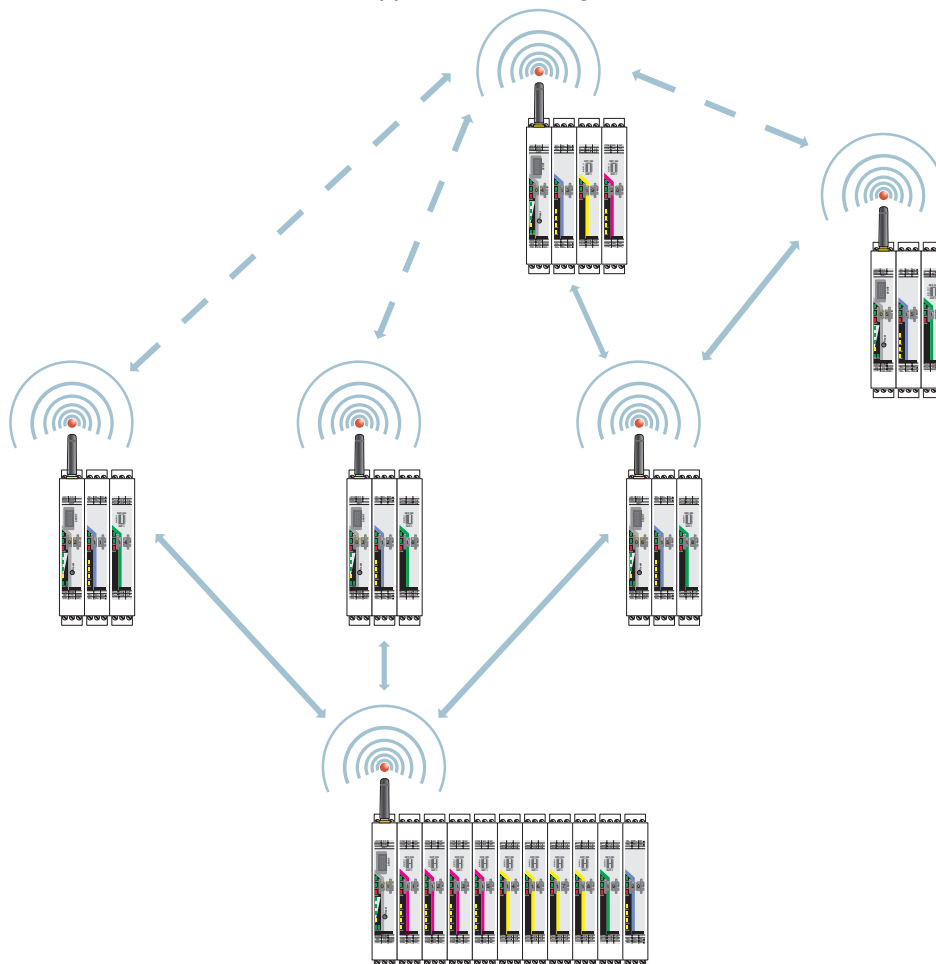

Wireless module in I/O data mode

Application drawing

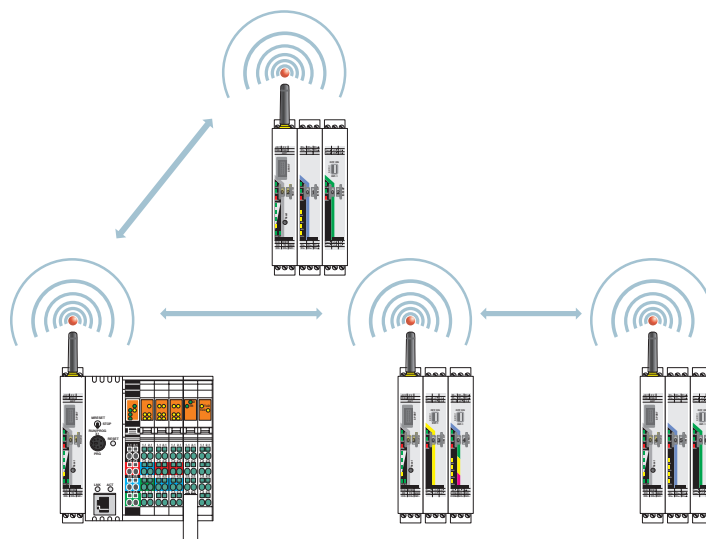

Wireless module in PLC/Modbus RTU mode


RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>



Application drawing

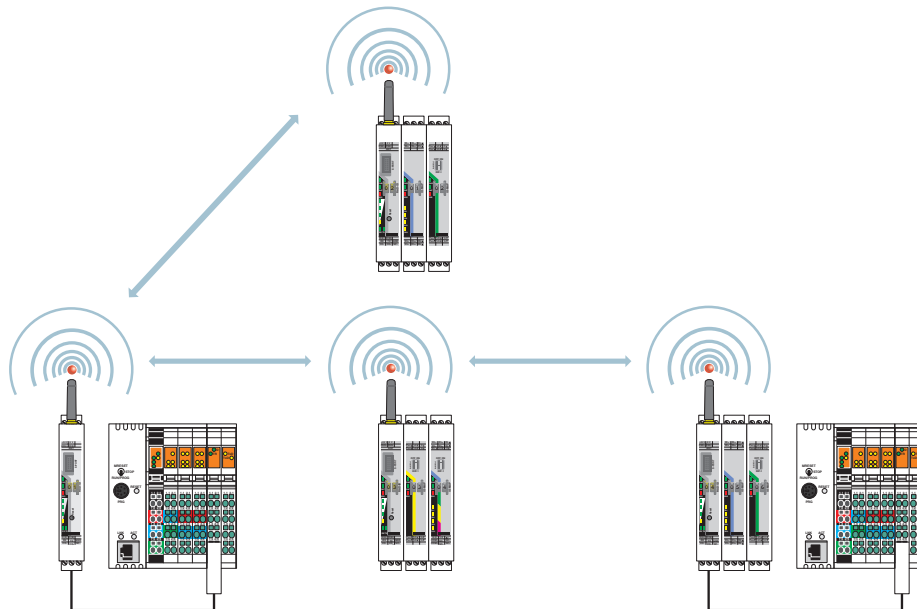

Wireless module in PLC/Modbus RTU dual mode


RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>



Schematic diagram

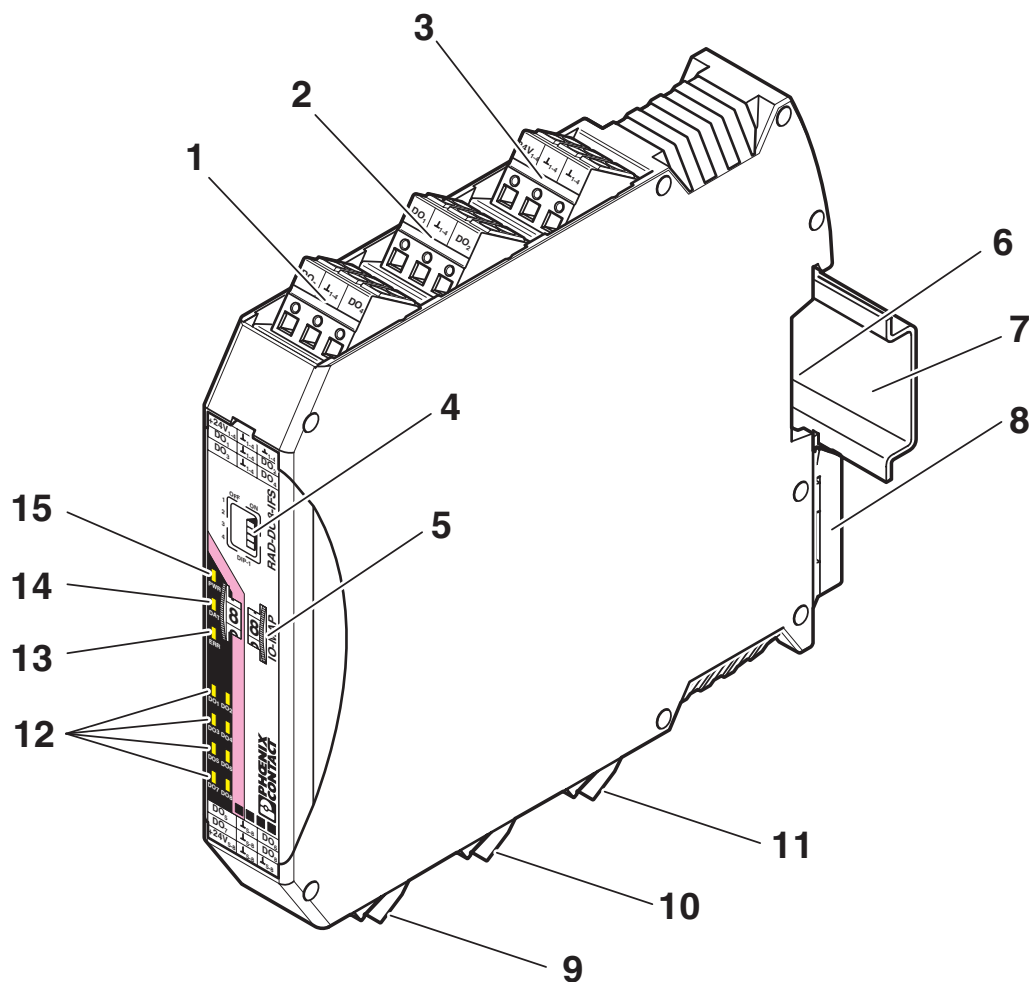


Function elements

RAD-DO8-IFS - I/O extension module



2902811
<https://www.phoenixcontact.com/au/products/2902811>

Schematic diagram

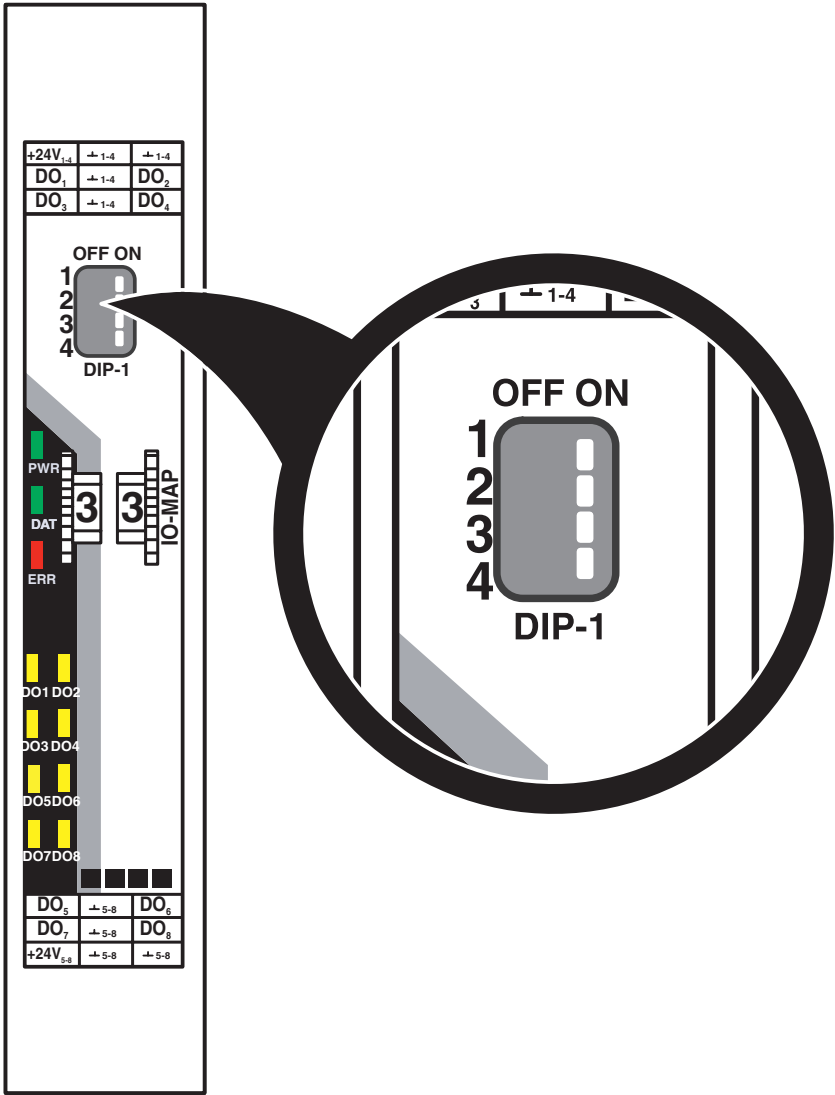


DIP switches

RAD-DO8-IFS - I/O extension module



2902811
<https://www.phoenixcontact.com/au/products/2902811>

Schematic diagram

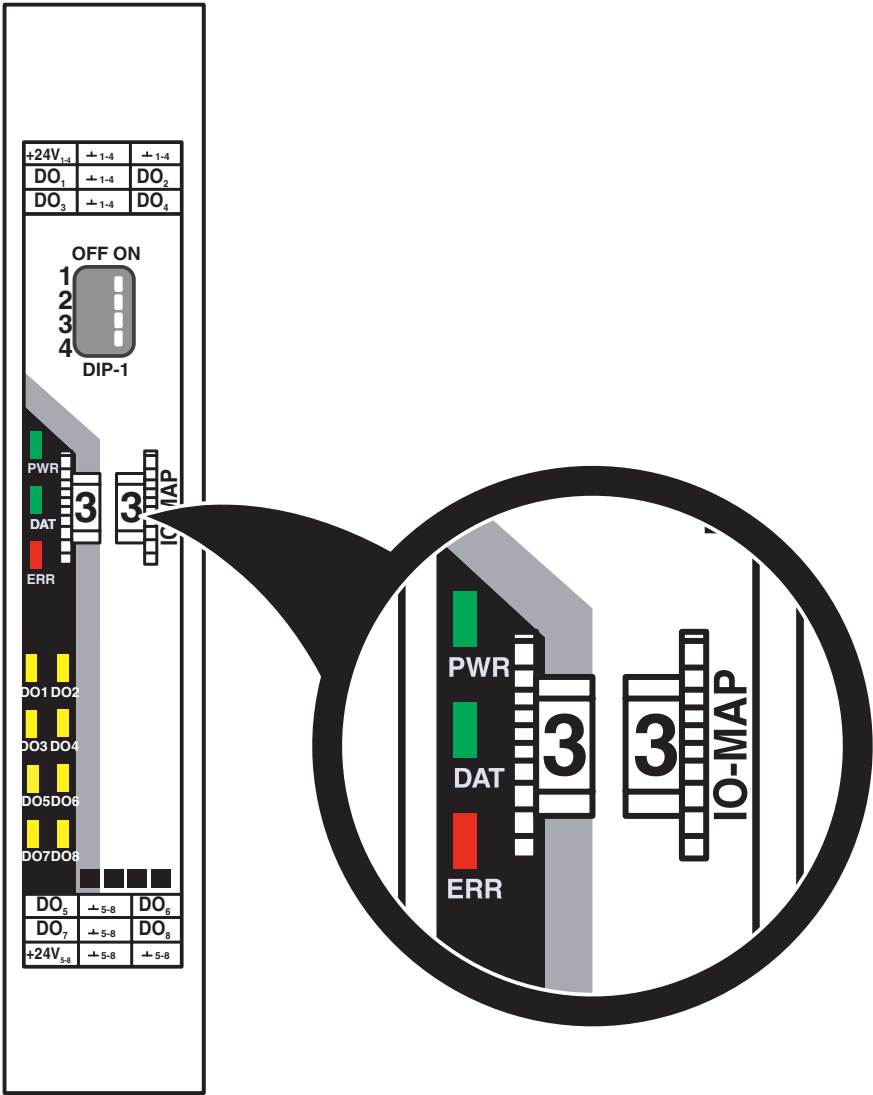


Thumbwheel

RAD-DO8-IFS - I/O extension module



2902811
<https://www.phoenixcontact.com/au/products/2902811>

Schematic diagram

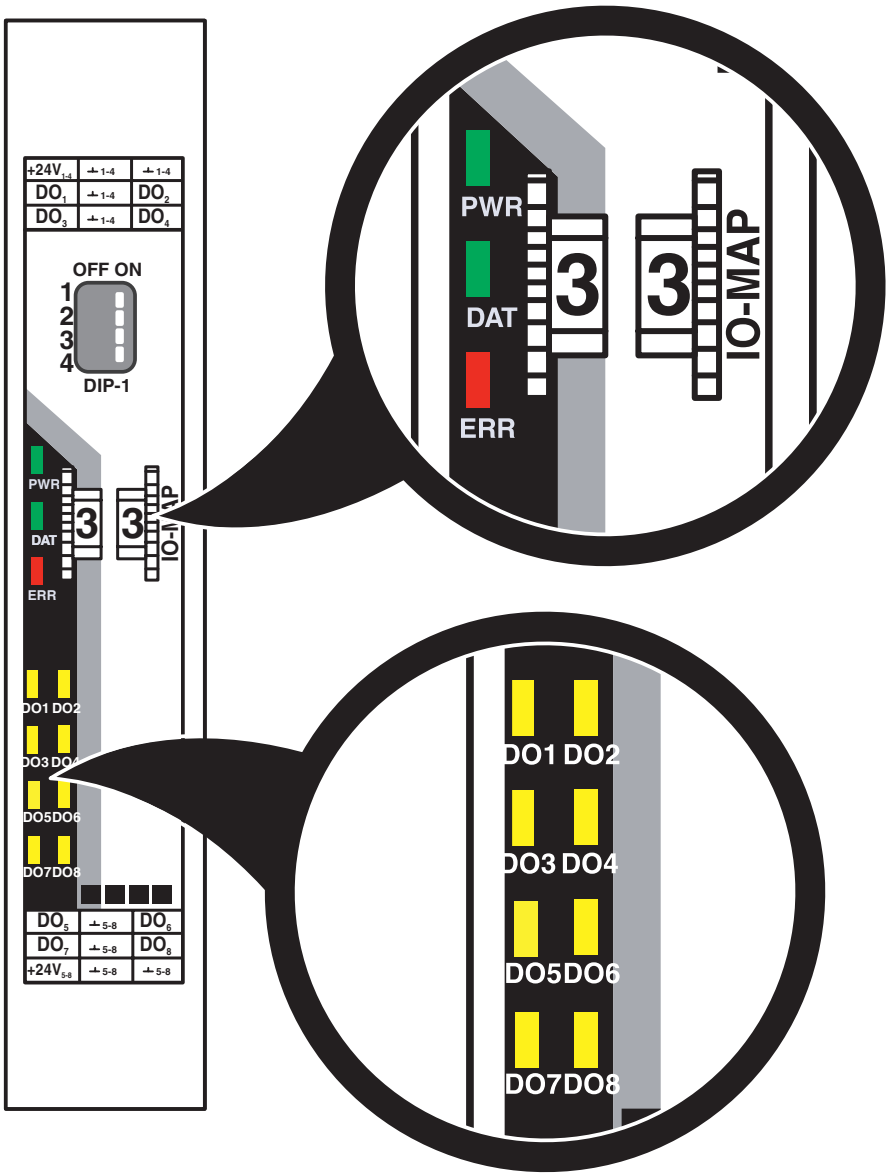

LED indicators


RAD-DO8-IFS - I/O extension module

2902811

<https://www.phoenixcontact.com/au/products/2902811>



Circuit diagram

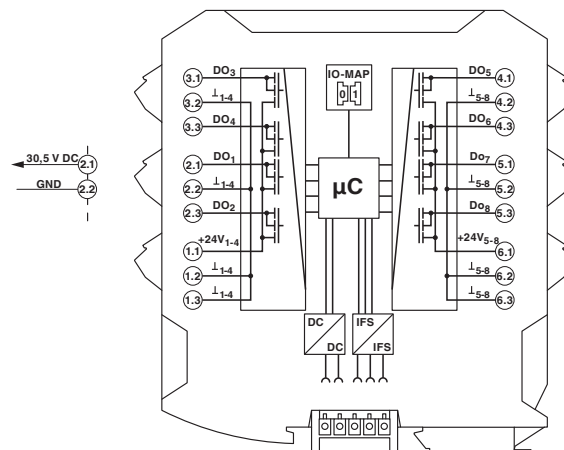

Basic circuit diagram

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2902811>



UL Listed

Approval ID: E238705



cUL Listed

Approval ID: E238705



IECEX

Approval ID: IECEX IBE 13.0019X



cUL Listed

Approval ID: E196811



UL Listed

Approval ID: E196811



ATEX

Approval ID: IBExU 15 ATEX B008 X



EAC Ex

Approval ID: RU*HB49.B00033/20



CCC

Approval ID: 2022122310115625



ATEX

Approval ID: IBExU15ATEXB008 X

RAD-DO8-IFS - I/O extension module



2902811

<https://www.phoenixcontact.com/au/products/2902811>

Classifications

ECLASS

ECLASS-13.0	27242604
-------------	----------

ETIM

ETIM 9.0	EC001599
----------	----------

UNSPSC

UNSPSC 21.0	32151602
-------------	----------

RAD-DO8-IFS - I/O extension module



2902811
<https://www.phoenixcontact.com/au/products/2902811>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	26a37ca1-3e71-4697-9976-5f57188c8b0a

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au