

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Plug-in high-power relay with power contacts, 3 changeover contacts, coil voltage: 230 V AC



## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 2903705             |
| Packing unit                         | 1 pc                |
| Minimum order quantity               | 1 pc                |
| Sales key                            | DK6965              |
| Product key                          | DK6965              |
| Catalog page                         | Page 312 (C-5-2019) |
| GTIN                                 | 4046356759175       |
| Weight per piece (including packing) | 84.5 g              |
| Weight per piece (excluding packing) | 84.5 g              |
| Customs tariff number                | 85364900            |
| Country of origin                    | PL                  |

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Technical data

### Notes

|                    |                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------|
| Notes on operation | The outputs are not suitable for switching different outer conductors.                                     |
| Notes on operation | Do not use to separate SELV / PELV circuits from other circuits, because safe isolation is not guaranteed. |

### Product properties

|                         |                       |
|-------------------------|-----------------------|
| Product type            | Single relay          |
| Operating mode          | 100% operating factor |
| Mechanical service life | approx. $10^7$ cycles |

### Insulation characteristics

|                      |                  |
|----------------------|------------------|
| Insulation           | Basic insulation |
| Overvoltage category | III              |
| Pollution degree     | 3                |

### Data management status

|                              |            |
|------------------------------|------------|
| Date of last data management | 20.03.2025 |
|------------------------------|------------|

### Electrical properties

|                                                      |                                                                              |
|------------------------------------------------------|------------------------------------------------------------------------------|
| Service life electrical                              | see diagram                                                                  |
| Maximum power dissipation for nominal condition      | 2.76 W                                                                       |
| Test voltage (Winding/contact)                       | 2.5 kV <sub>rms</sub> (50 Hz, 1 min., winding/contact)                       |
| Test voltage (Changeover contact/changeover contact) | 2.5 kV <sub>rms</sub> (50 Hz, 1 min., changeover contact/changeover contact) |
| Rated insulation voltage                             | 250 V AC                                                                     |
| Rated surge voltage                                  | 4 kV                                                                         |

### Input data

#### Coil side

|                                   |                                              |
|-----------------------------------|----------------------------------------------|
| Nominal input voltage $U_N$       | 230 V AC                                     |
| Input voltage range               | 195.5 V AC ... 253 V AC (20 °C)              |
| Mains frequency                   | 50/60 Hz                                     |
| Drive and function                | monostable                                   |
| Drive (polarity)                  | non-polarized                                |
| Typical input current at $U_N$    | 12 mA                                        |
| Input power dissipation for $U_N$ | 2.8 W                                        |
| Typical response time             | 5 ms ... 25 ms (depending on phase relation) |
| Typical release time range        | 5 ms ... 20 ms (depending on phase relation) |
| Coil resistance                   | 7080 $\Omega$ $\pm$ 15 %                     |

### Output data

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Switching

|                                       |                                                |
|---------------------------------------|------------------------------------------------|
| Contact switching type                | 3 changeover contacts                          |
| Type of switch contact                | Single contact                                 |
| Contact material                      | AgNi                                           |
| Maximum switching voltage             | 440 V AC                                       |
|                                       | 250 V DC                                       |
| Minimum switching voltage             | 10 V (At 24 mA)                                |
| Limiting continuous current           | 16 A                                           |
| Maximum inrush current                | 50 A (20 ms, N/O contacts)                     |
| Min. switching current                | 10 mA (at 24 V)                                |
| Interrupting rating (ohmic load) max. | 384 W (at 24 V DC)                             |
|                                       | 124 W (at 48 V DC)                             |
|                                       | 108 W (at 60 V DC)                             |
|                                       | 52 W (at 110 V DC)                             |
|                                       | 70 W (at 220 V DC)                             |
|                                       | 4000 VA (for 250 V AC)                         |
|                                       | 4000 VA (at 440 V AC)                          |
| 3-phase motor load                    | 1500 W (at 400 V, AC3)                         |
| Motor load according to UL 508        | 1/3 HP, 120 V AC (single-phase AC motor)       |
|                                       | 1/2 HP, 240 V AC (single-phase AC motor)       |
|                                       | 1/2 HP, 240 V AC (three-phase induction motor) |

## Connection data

|                   |                    |
|-------------------|--------------------|
| Connection method | Plug-in connection |
|-------------------|--------------------|

## Dimensions

|        |         |
|--------|---------|
| Width  | 38.6 mm |
| Height | 36.1 mm |
| Depth  | 45.5 mm |

## Environmental and real-life conditions

### Ambient conditions

|                                              |                                |
|----------------------------------------------|--------------------------------|
| Degree of protection                         | RT I                           |
| Degree of protection (Installation location) | ≥ IP54 (Installation location) |
| Ambient temperature (operation)              | -40 °C ... 55 °C               |
| Ambient temperature (storage/transport)      | -40 °C ... 85 °C               |
| Altitude                                     | ≤ 2000 m                       |

## Approvals

### Corrosive gas test

|                |                            |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
|                | EN 60068-2-60              |

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Standards and regulations


|                       |           |
|-----------------------|-----------|
| Standards/regulations | IEC 60664 |
|                       | IEC 61810 |

## Mounting

|                   |     |
|-------------------|-----|
| Mounting position | any |
|-------------------|-----|

## Drawings


Diagram

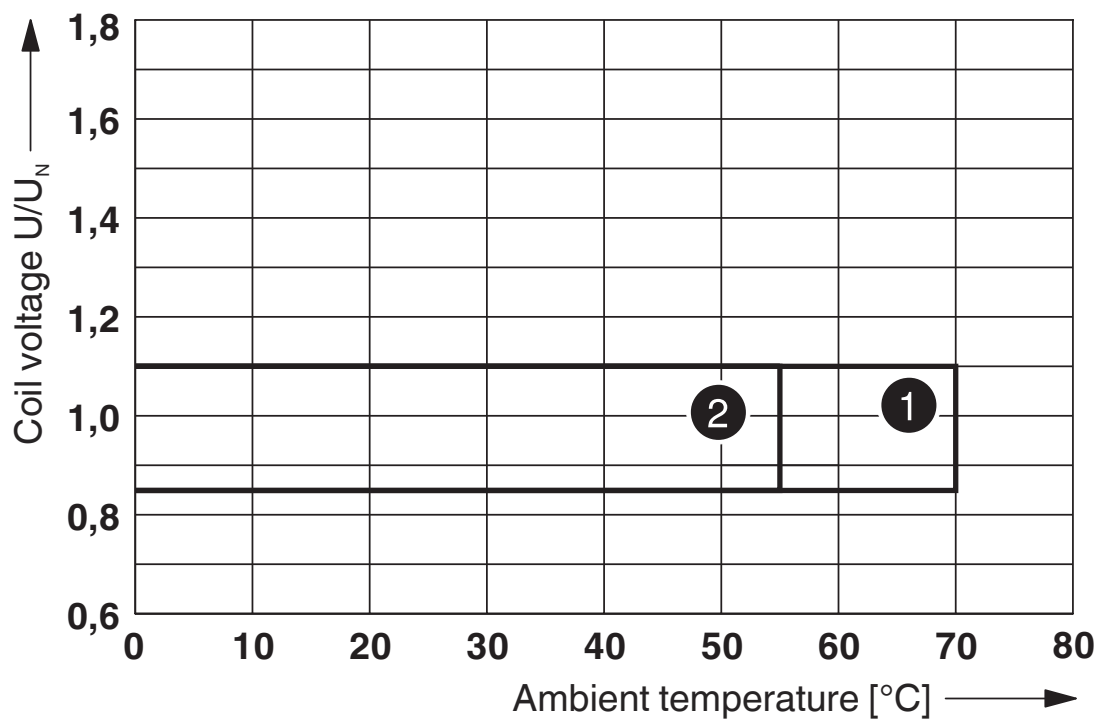

① DC coils


② AC coils

Operating voltage range

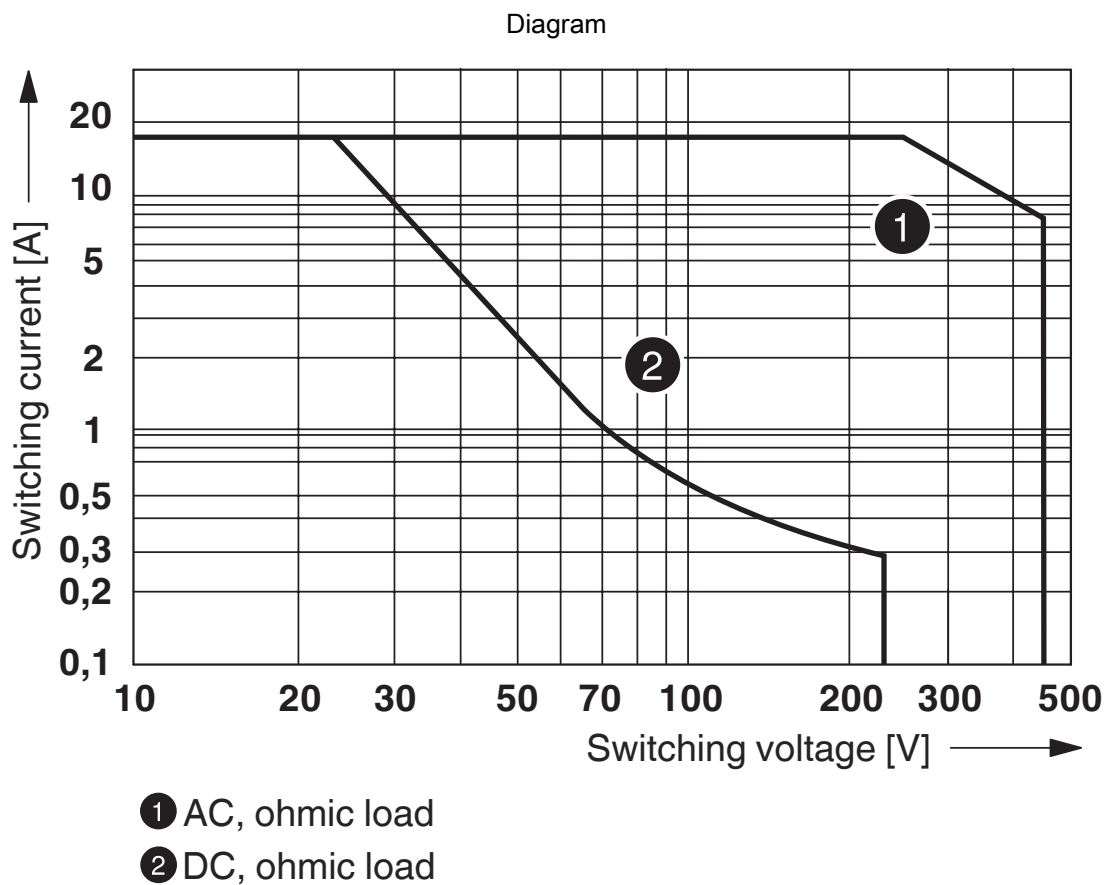

Interrupting rating

Diagram

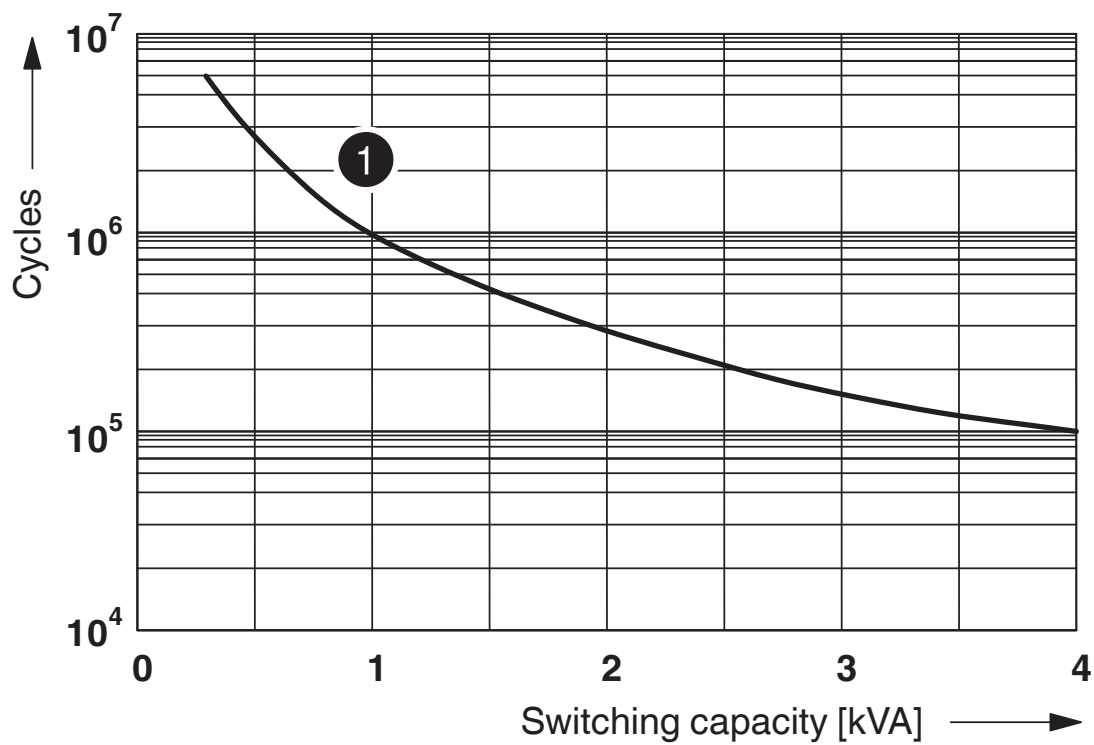

① 250 V AC, Ohmic load


Electrical service life

Diagram



Service life reduction factor

Diagram

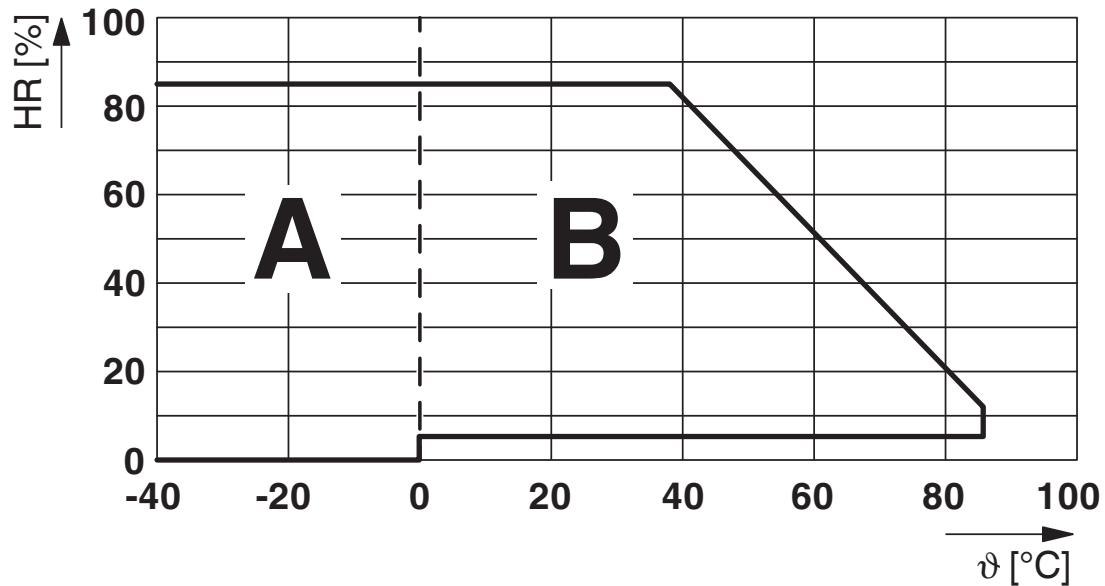

Permissible humidity for operation and storage.


The maximum permissible ambient temperature as specified in the data sheet must be observed.

Area A: Ice buildup at ambient temperatures  $\leq 0^{\circ}\text{C}$  must be prevented

Area B: Condensation at ambient temperatures  $> 0^{\circ}\text{C}$  must be prevented

On 30 full days that are naturally distributed across an entire year, a humidity level of 95% is permissible at an ambient temperature  $\leq 25^{\circ}\text{C}$ .

Circuit diagram

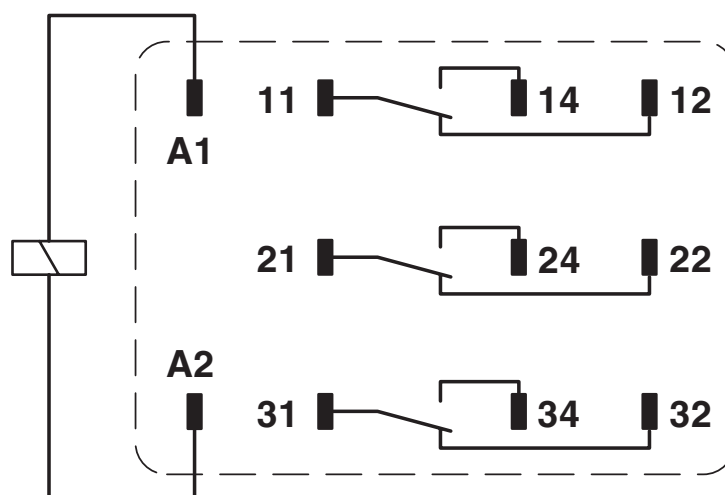

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2903705>



**CSA**

Approval ID: 256725



**EAC**

Approval ID: RU\*C-DE.\*08.B.00010



**cULus Recognized**

Approval ID: E172140

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

# REL-PR3-230AC/3X21 - Single relay



2903705

<https://www.phoenixcontact.com/au/products/2903705>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)