

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protection for a 2-wire floating signal circuit, e.g., 0(4) mA ... 20 mA current loop, HART-compatible. Can be used in safety-related circuits up to SIL 3.

Your advantages

- Extremely space-saving installation with the narrowest overall width of just 3.5 mm
- Cost-optimized with tailored product features
- Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features

Commercial data

Item number	2907325
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL2266
Product key	CL2266
Catalog page	Page 119 (C-4-2019)
GTIN	4055626199917
Weight per piece (including packing)	24.5 g
Weight per piece (excluding packing)	19.5 g
Customs tariff number	85363030
Country of origin	DE

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Technical data

Product properties

Product type	Surge protection for MCR technology
Product family	TERMITRAB complete
IEC test classification	C1
	C2
	C3
	D1
Type	DIN rail module, one-piece
Wire pairs per module	1

Insulation characteristics

Overvoltage category	III
Pollution degree	2


Electrical properties

Nominal voltage U_N	24 V DC
-----------------------	---------

Connection data

Connection method	Push-in connection
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.2 mm ² ... 1 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.2 mm ² ... 1.5 mm ²
Conductor cross section rigid	0.2 mm ² ... 1.5 mm ²
Conductor cross section AWG	24 ... 16

Dimensions

Dimensional drawing	
Width	3.5 mm
Height	106 mm
Depth	69.5 mm (incl. DIN rail 7.5 mm)

Material specifications

Color	gray (RAL 7042)
	gray (RAL 7042)
Flammability rating according to UL 94	V-0
Insulating material	PBT
Housing material	PBT

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Protective circuit

Direction of action	Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground
Maximum continuous voltage U_C	30 V DC 21 V AC
Rated current	250 mA (70 °C)
Operating effective current I_C at U_C	$\leq 1 \mu A$
Protective conductor current I_{PE}	$\leq 1 \mu A$
Nominal discharge current I_n (8/20) μs (line-line)	5 kA
Nominal discharge current I_n (8/20) μs (line-ground)	5 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	0.5 kA
Total discharge current I_{Total} (8/20) μs	10 kA
Voltage protection level U_p (line-line)	$\leq 50 V$ (C1 - 500 V / 250 A) $\leq 70 V$ (C2 - 10 kV / 5 kA) $\leq 45 V$ (C3 - 30 A)
Voltage protection level U_p (line-earth)	$\leq 1000 V$ (C2 - 10 kV / 5 kA) $\leq 1000 V$ (C3 - 100 A)
Voltage protection level U_p static (line-line)	$\leq 50 V$ (C1 - 1 kV / 500 A)
Response time t_A (line-line)	$\leq 1 ns$
Input attenuation aE, sym.	typ. 0.3 dB ($\leq 600 kHz$ / 150 Ω)
Cut-off frequency f_g (3 dB), sym. in 150 Ω system	typ. 2.4 MHz
Capacity (Core-Core)	typ. 1 nF
Resistance per path	2.2 $\Omega \pm 10 \%$
Surge protection fault message	none
Max. required back-up fuse	250 mA (FF)
Impulse durability (line-line)	C1 - 500 V / 250 A C2 - 10 kV / 5 kA C3 - 30 A
Impulse durability (line-earth)	C2 - 10 kV / 5 kA C3 - 100 A D1 - 500 A
Pulse reset time (line-line)	$\leq 30 ms$

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20 (with end cover)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	$\leq 4000 m$ (amsl)

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Permissible humidity (operation)	5 % ... 95 %
----------------------------------	--------------

Standards and regulations

Standards/specifications	IEC 61643-21
Note	2000 + corrigendum 2001 + A1:2008, modified + A2:2012

EN 61643-21

Standards/specifications	EN 61643-21
Note	2001 + A1:2009 + A2:2013

Mounting

Mounting type	DIN rail: TH 35 - 7.5 mm
---------------	--------------------------

TTC-3-1X2-24DC-PT - Surge protection device


2907325

https://www.phoenixcontact.com/au/products/2907325



Drawings

Dimensional drawing

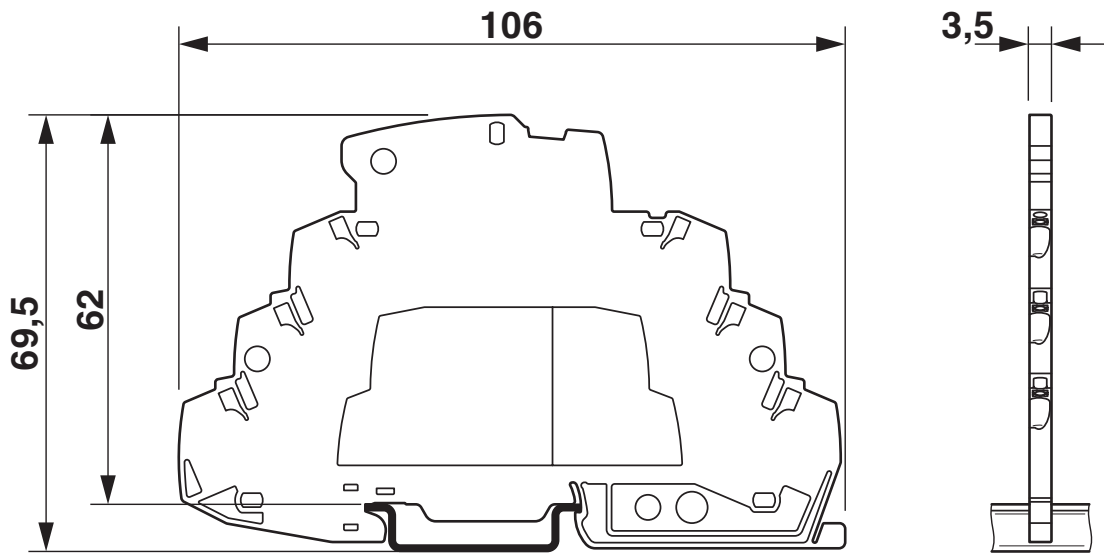


Schematic diagram

TTC-3-1X2-...									
Category	1oo1 architecture, HFT=0				1oo2 architecture, HFT=1				
	PFD _{AVG}	PFH	Used budget of SIL 2 SIF		PFD _{AVG}	PFH	CCF	Used budget of SIL 3 SIF	
			PFD _{AVG}	PFH				PFD _{AVG}	PFH
	9.44 _{x10⁻⁵}	1.68 _{x10⁻⁸} 1/h	0.9%	1.7 %	4.73 _{x10⁻⁶}	8.43 _{x10⁻¹⁰} 1/h	5 %	0.5 %	0.8%
				9.46 _{x10⁻⁶}	1.68 _{x10⁻⁸} 1/h	10 %	0.9 %	1.7 %	
Calculation based on exida report, Phoenix Contact 16/06-072 R023 V3R1 exida Profile 1, FMEDA Analysis 2, T _{proof} : 1 year, MT: 10 years, MTTR: 24 hours, PTC: 99%									
Used standards IEC/EN 61508, edition 2010 (device specific) IEC/EN 61511, edition 2016 + COR1:2016 + A1:2017 (system specific)									

Functional safety scenarios

Diagram

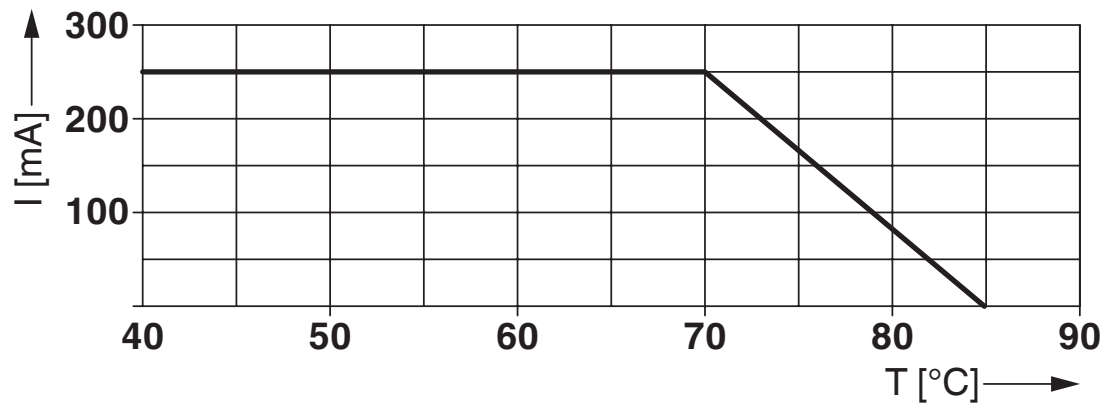


TTC-3-1X2-24DC-PT - Surge protection device

2907325

<https://www.phoenixcontact.com/au/products/2907325>



Circuit diagram

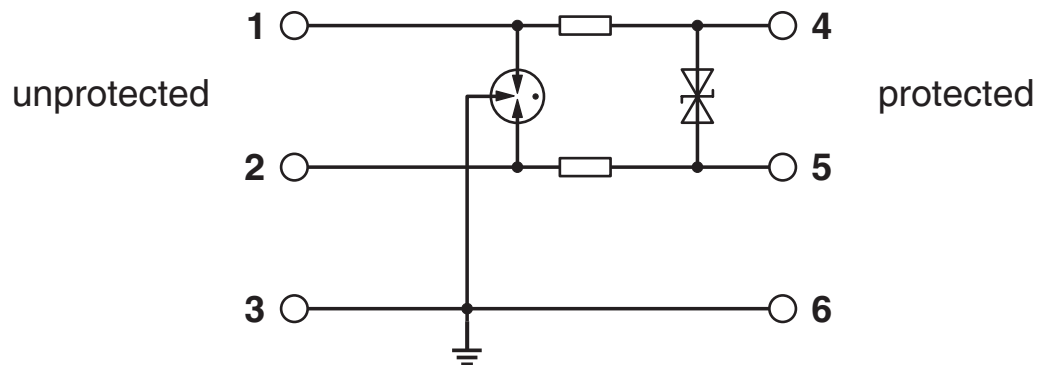

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2907325>



CSA

Approval ID: 70136717



DNV GL

Approval ID: TAE000027G



UL Listed

Approval ID: FILE E 138168



CSAus

Approval ID: 70136717

Functional Safety

Approval ID: 16-06-072 R023 V3R1

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Classifications

ECLASS

ECLASS-13.0	27171501
-------------	----------

ETIM

ETIM 9.0	EC000943
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

TTC-3-1X2-24DC-PT - Surge protection device



2907325

<https://www.phoenixcontact.com/au/products/2907325>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d160e4e4-3b4f-4507-8019-35e3364d8151

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au