

# UT 35-PE - Protective conductor terminal block



3044241  
<https://www.phoenixcontact.com/au/products/3044241>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor terminal block, number of connections: 2, connection method: Screw connection, Rated cross section: 35 mm<sup>2</sup>, cross section: 1.5 mm<sup>2</sup> - 35 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: green-yellow

## Your advantages

- The flexible options for reducing bridging in the CLIPLINE complete system can be found in "Accessories for the CLIPLINE complete modular terminal block system"
- Tested for railway applications

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 3044241             |
| Packing unit                         | 50 pc               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BE1121              |
| Product key                          | BE1121              |
| Catalog page                         | Page 187 (C-1-2019) |
| GTIN                                 | 4017918977580       |
| Weight per piece (including packing) | 88.475 g            |
| Weight per piece (excluding packing) | 85.79 g             |
| Customs tariff number                | 85369010            |
| Country of origin                    | TR                  |

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>

## Technical data

### Product properties

|                       |                       |
|-----------------------|-----------------------|
| Product type          | Ground terminal block |
| Product family        | UT                    |
| Area of application   | Railway industry      |
|                       | Machine building      |
|                       | Plant engineering     |
|                       | Process industry      |
| Number of connections | 2                     |
| Number of rows        | 1                     |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 8 kV   |
| Maximum power dissipation for nominal condition | 4.06 W |

### Connection data

|                                                                   |                                                                                                                              |
|-------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Number of connections per level                                   | 2                                                                                                                            |
| Nominal cross section                                             | 35 mm <sup>2</sup>                                                                                                           |
| Screw thread                                                      | M6                                                                                                                           |
| Note                                                              | Please observe the current carrying capacity of the DIN rails.                                                               |
| Tightening torque                                                 | 3.2 ... 3.7 Nm                                                                                                               |
| Stripping length                                                  | 18 mm                                                                                                                        |
| Internal cylindrical gage                                         | B9                                                                                                                           |
| Connection in acc. with standard                                  | IEC 60947-7-2                                                                                                                |
| Conductor cross section rigid                                     | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>                                                                                   |
| Cross section AWG                                                 | 14 ... 2 (converted acc. to IEC)                                                                                             |
| Conductor cross section flexible                                  | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>                                                                                   |
| Conductor cross section, flexible [AWG]                           | 14 ... 2 (converted acc. to IEC)                                                                                             |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>                                                                                   |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup>                                                                                   |
| Note                                                              | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area. |
| Nominal cross section                                             | 35 mm <sup>2</sup>                                                                                                           |

### Ex data

#### Rated data (ATEX/IECEx)

|                             |                         |
|-----------------------------|-------------------------|
| Identification              | Ex II 2 GD Ex eb IIC Gb |
| Operating temperature range | -60 °C ... 110 °C       |
|                             | 1205079 SZS 1,0X6,5 VDE |

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>

|                          |                      |
|--------------------------|----------------------|
| Ex-certified accessories | 3022276 CLIPFIX 35-5 |
|                          | 3022218 CLIPFIX 35   |
| output                   | (Permanent)          |

## Ex connection data General

|                              |                                            |
|------------------------------|--------------------------------------------|
| Torque range                 | 3.2 Nm ... 3.7 Nm                          |
| Nominal cross section        | 35 mm <sup>2</sup>                         |
| Rated cross section AWG      | 2                                          |
| Connection capacity rigid    | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup> |
| Connection capacity AWG      | 16 ... 2                                   |
| Connection capacity flexible | 1.5 mm <sup>2</sup> ... 35 mm <sup>2</sup> |
| Connection capacity AWG      | 16 ... 2                                   |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 16 mm   |
| End cover width    | 2.2 mm  |
| Height             | 61.2 mm |
| Depth              | 65.1 mm |
| Depth on NS 35/7,5 | 65.7 mm |
| Depth on NS 35/15  | 73.2 mm |

## Material specifications

|                                                                         |              |
|-------------------------------------------------------------------------|--------------|
| Color                                                                   | green-yellow |
| Flammability rating according to UL 94                                  | V0           |
| Insulating material group                                               | I            |
| Insulating material                                                     | PA           |
| Static insulating material application in cold                          | -60 °C       |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C       |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C       |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3  |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg     |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed       |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed       |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed       |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>

## Oscillation/broadband noise

|                        |                                                |
|------------------------|------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2018-05            |
| Spectrum               | Long life test category 2, bogie-mounted       |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level              | $6.12 \text{ (m/s}^2\text{)}^2/\text{Hz}$      |
| Acceleration           | 3.12g                                          |
| Test duration per axis | 5 h                                            |
| Test directions        | X-, Y- and Z-axis                              |
| Result                 | Test passed                                    |

## Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

## Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |


# UT 35-PE - Protective conductor terminal block

3044241

<https://www.phoenixcontact.com/au/products/3044241>


## Drawings

Schematic diagram

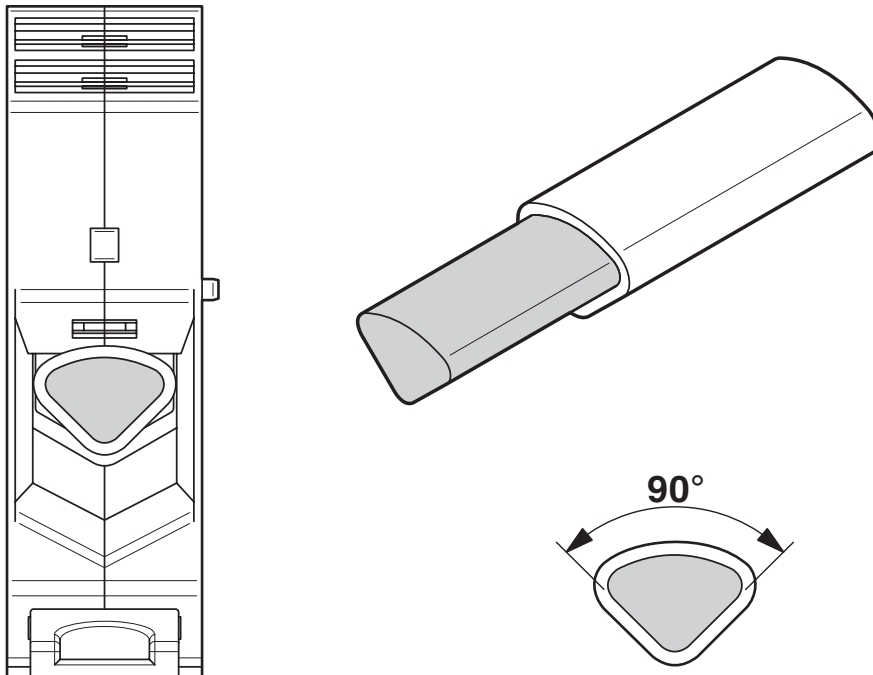

Connecting aluminum cables. Further notes can be found in the download area

Circuit diagram

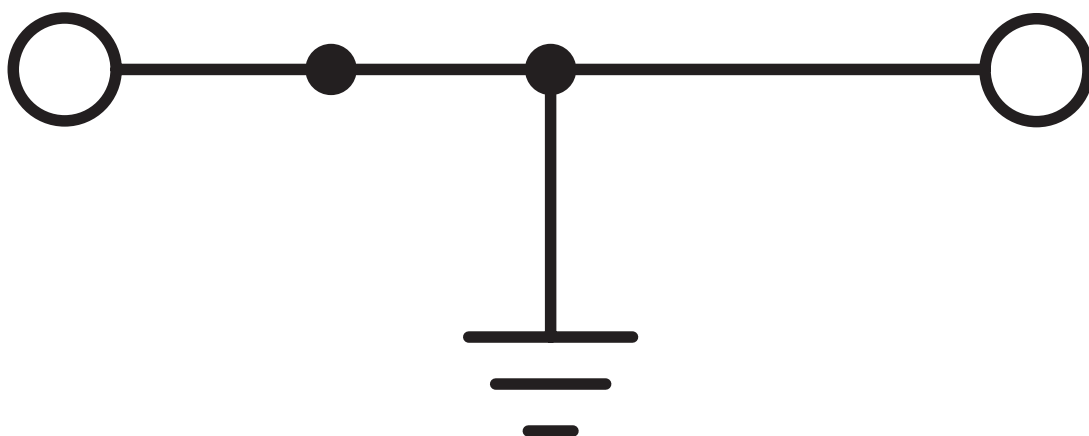

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3044241>

**DNV**

Approval ID: TAE00001S9



**CSA**

Approval ID: 13631



**IECEE CB Scheme**

Approval ID: DE1-63048



**cULus Recognized**

Approval ID: E60425

|             | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------------|-----------------------|-----------------------|-------------------|-----------------------------|
| Use group B | -                     | -                     | 14 - 2            | -                           |
| Use group C | -                     | -                     | 14 - 2            | -                           |
| Use group E | -                     | -                     | 14 - 2            | -                           |



**VDE approval of drawings**

Approval ID: 40020167

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | -                     | 125 A                 | -                 | 1.5 - 35                    |



**CSA**

Approval ID: 13631



**ATEX**

Approval ID: KEMA04ATEX2048U



**cUL Recognized**

Approval ID: E192998

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | -                     | -                     | 14 - 2            | -                           |

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>



IECEx

Approval ID: IECEx KEM 06.0027U

|                                                                                                                                            |                       |                       |                   |                             |
|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| <div> <b>UL Recognized</b><br/>Approval ID: E192998</div> |                       |                       |                   |                             |
|                                                                                                                                            | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                                                                                                            | -                     | -                     | 14 - 2            | -                           |



CCC

Approval ID: 2020322313000622



UKCA-EX

Approval ID: DEKRA 21UKEX0304U



EAC Ex

Approval ID: KZ 7500525010101950

# UT 35-PE - Protective conductor terminal block



3044241

<https://www.phoenixcontact.com/au/products/3044241>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250103 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UT 35-PE - Protective conductor terminal block



3044241  
<https://www.phoenixcontact.com/au/products/3044241>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)