


UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Component terminal block, The current and voltage are determined by the LED display used., nom. voltage: 24 V, nominal current: 19 A, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Since function shafts are provided on each level, all potential distribution tasks can be implemented quickly
- For a clear overview, each terminal point supports large-surface labeling
- A very high wiring density is achieved with the compact three-level terminal blocks

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3214288 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE1174 |
| Product key | BE1174 |
| Catalog page | Page 150 (C-1-2019) |
| GTIN | 4046356575430 |
| Weight per piece (including packing) | 25.593 g |
| Weight per piece (excluding packing) | 25.593 g |
| Customs tariff number | 85369010 |
| Country of origin | PL |

UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Technical data

Notes

| | |
|---------|---|
| General | The current and voltage are determined by the LED display used. |
| General | |
| Note | Current and voltage are determined by the resistance and the light indicator. |

Product properties

| | |
|-----------------------|--------------------------|
| Product type | Component terminal block |
| Number of connections | 6 |
| Number of rows | 3 |
| Potentials | 3 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---------------------|---------------------|
| Rated surge voltage | 6 kV |
| LED voltage range | 15 V DC ... 30 V DC |
| LED current range | 2.5 mA ... 7.5 mA |

Input data

| | |
|-------------------|---------------------|
| LED voltage range | 15 V DC ... 30 V DC |
|-------------------|---------------------|

Connection data

| | |
|---|---|
| Number of connections per level | 2 |
| Nominal cross section | 2.5 mm ² |
| Screw thread | M3 |
| Tightening torque | 0.5 ... 0.6 Nm |
| Stripping length | 9 mm |
| Internal cylindrical gage | A3 |
| Conductor cross section rigid | 0.14 mm ² ... 4 mm ² |
| Cross section AWG | 26 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.14 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 26 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.14 mm ² ... 2.5 mm ² |
| Nominal current | 19 A (with a 2.5 mm ² conductor cross section) |
| Maximum load current | 24 A (with 4 mm ² conductor cross section) |
| Nominal voltage | 24 V |
| Nominal cross section | 2.5 mm ² |

UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Dimensions

| | |
|--------------------|---------|
| Width | 5.2 mm |
| End cover width | 2.2 mm |
| Height | 90 mm |
| Depth on NS 35/7,5 | 77.5 mm |
| Depth on NS 35/15 | 85 mm |

Material specifications

| | |
|---|-----------------|
| Color | gray (RAL 7042) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

Environmental and real-life conditions

Ambient conditions


| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

Drawings

Circuit diagram

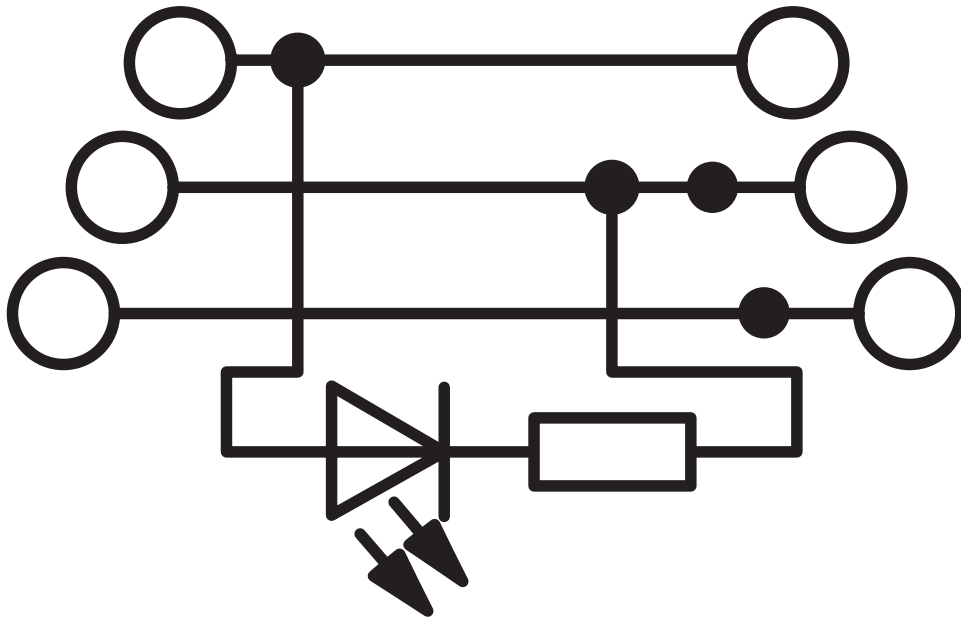

UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3214288>



CSA

Approval ID: 13631



cULus Recognized

Approval ID: E60425



CSA

Approval ID: 13631



cULus Recognized

Approval ID: E60425

UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250114 |
|-------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000903 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

UT 2,5-3L-LA24RD/O-M - Component terminal block



3214288

<https://www.phoenixcontact.com/au/products/3214288>

Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 67a6b13a-ff38-46ad-a715-5aea32dbca66 |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au