

# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



LED enclosure light, 24 V AC/DC ... 265 V AC/DC, length: 350 mm, degree of protection: IP20, can be swiveled ( $\pm 90^\circ$  swivel range), with motion detector, including mounting accessories

## Product description

The LED light is designed to illuminate the interior of control cabinets. The prismatic integrated into the light cover ensures optimum illumination of the control cabinet. You can use magnets or screws to affix the light holder. The light can swivel in the holder. Connect the supply voltage to the light via Push-in connection. You do not require special connectors for this. You can connect several lights in succession. As soon as you have supplied the light with voltage, it is ready for operation and is in motion detector mode (delivery state) or in continuous ON mode. You can switch between motion detector mode and continuous ON mode via a button.

## Your advantages

- Series connection reduces cabling effort for control cabinets arranged in series
- Optimum lighting of the control cabinet, thanks to integrated prismatics and capacity to swivel
- Wide range input 24 V AC/DC ... 265 V AC/DC
- Extended temperature range of  $-25^\circ\text{C}$  ...  $+70^\circ\text{C}$  (at 24 V DC)
- LED service life of 50,000 h (L70 value) prevents bulb replacement
- Motion detector

## Commercial data

Item number	1319573
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRL232
Product key	DRL232
GTIN	4063151604172
Weight per piece (including packing)	232.2 g
Weight per piece (excluding packing)	150 g
Customs tariff number	94054231
Country of origin	DE

# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Control cabinet lighting
Application	Control cabinet
Mounting position	any
Special properties	24 V AC/DC ... 265 V AC/DC
	can be swiveled ( $\pm 90^\circ$ swivel range)
	with motion detector
	including mounting accessories
Socket type	No socket

### Electrical properties

#### Supply: Module electronics

Connection method	Push-in connection
Number of positions	2
Supply voltage range	24 V AC/DC ... 265 V AC/DC (50/60 Hz (AC))
Current consumption	250 mA (24 V DC)
	28 mA (240 V / 50 Hz)
Power consumption	6 W

### Connection data

Connection method	Push-in connection
Conductor cross section, rigid	0.13 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible	0.13 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.5 mm <sup>2</sup> ... 0.75 mm <sup>2</sup> (DIN 46228-4)
Conductor cross section flexible, with ferrule without plastic sleeve	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (DIN 46228-1)
Stripping length	10 mm

### Signaling

#### Motion detector

Detection range	max. 5 m
Detection angle	100 °
Lighting duration	5 min (Retriggered)

#### Light properties

Source of light type	LED
----------------------	-----

# PLD E 409 W 350 MS - LED enclosure light




1319573

<https://www.phoenixcontact.com/au/products/1319573>

Number of LEDs	18
Color temperature	5000 K
Color rendering index	85
Luminous flux	700 lm (Net luminous flux)
Illumination	max. 1200 lx (50 cm distance) max. 450 lx (Distance of 1 m)
Ordinance	Delegated Regulation (EU) 2019/2015
Energy efficiency class	D (1 light source)
Note	This product contains an energy efficiency class D light source.

## Dimensions

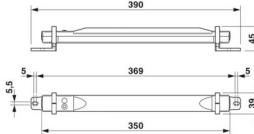Dimensional drawing	
Width	39 mm
Height	45 mm
Length	390 mm

## Material specifications

Color	traffic grey A RAL 7042
Material ()	Polycarbonate (Housing)

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C (Standard applications and applications with UL approval) -25 °C ... 70 °C (at 24 V DC)
Degree of protection	IP20
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 90 %
Permissible humidity (storage/transport)	5 % ... 90 %

### Energy labeling

Registration number	1321542
Model ID	79 LEX PMBPIL
Energy efficiency class	D
Note (EPREL)	( <a href="https://eprel.ec.europa.eu/screen/home">https://eprel.ec.europa.eu/screen/home</a> ) EPREL entry can be searched for with model ID ( <a href="https://eprel.ec.europa.eu/screen/product/lightsources">https://eprel.ec.europa.eu/screen/product/lightsources</a> )

## Standards and regulations

Protection class	II
------------------	----

# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

## Mounting

Mounting type	Screw/magnet mounting
Mounting position	any

# PLD E 409 W 350 MS - LED enclosure light




1319573

<https://www.phoenixcontact.com/au/products/1319573>


## Drawings

Dimensional drawing

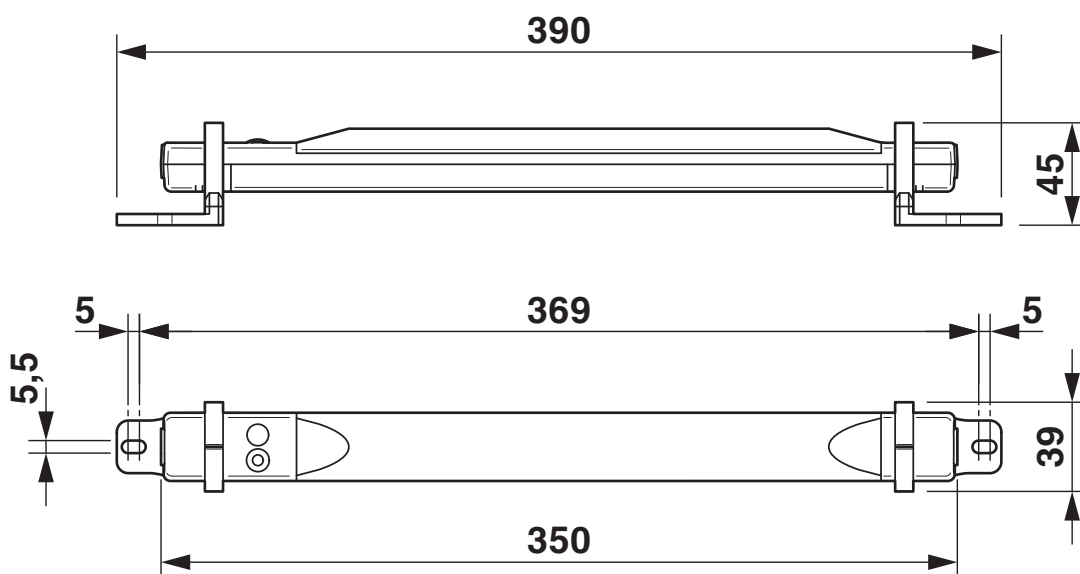


Dimensions (in mm)

Schematic diagram




Connection of a light

Schematic diagram



Series connection of two lights

Block diagram

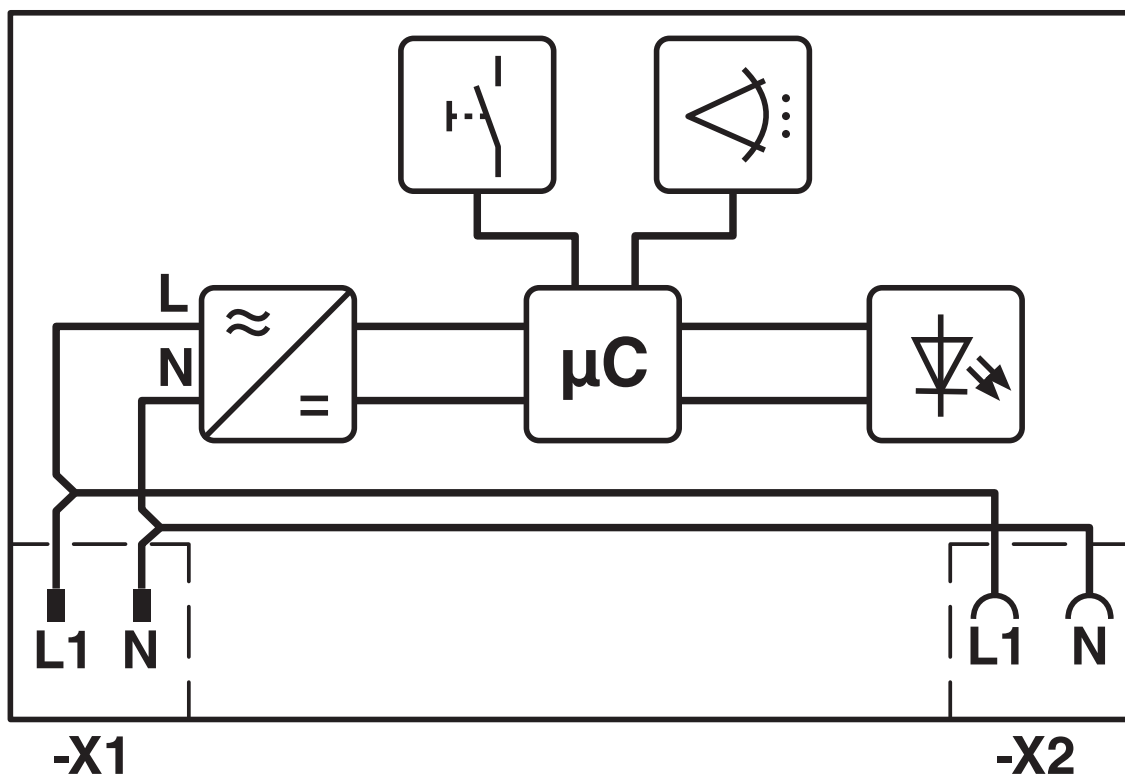

Internal wiring

# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1319573>



**cUL Recognized**

Approval ID: E255026



**UL Recognized**

Approval ID: E255026

# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

## Classifications

### ECLASS

ECLASS-13.0	27182808
-------------	----------

### ETIM

ETIM 9.0	EC000321
----------	----------

### UNSPSC

UNSPSC 21.0	32151500
-------------	----------



# PLD E 409 W 350 MS - LED enclosure light



1319573

<https://www.phoenixcontact.com/au/products/1319573>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)