

PT 6-FSI/C - Fuse modular terminal block



3212166

<https://www.phoenixcontact.com/au/products/3212166>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Blade, fuse type: Type C / max. 2.2 W, nom. voltage: 400 V, nominal current: 25 A, connection method: Push-in connection, Rated cross section: 6 mm², cross section: 0.5 mm²- 10 mm², mounting type: NS 35/7,5, NS 35/15, color: black

Your advantages

- In addition to the testing option in the double function shaft, all terminal blocks provide an additional test pick-off
- The compact design and front connection enable wiring in a confined space

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- Suitable for all flat-type fuse-links designed according ISO 8820-3 (DIN 72581-3)

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3212166 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE2236 |
| Product key | BE2236 |
| Catalog page | Page 112 (C-1-2019) |
| GTIN | 4055626394312 |
| Weight per piece (including packing) | 18.918 g |
| Weight per piece (excluding packing) | 17.292 g |
| Customs tariff number | 85369095 |
| Country of origin | CN |

Technical data

Notes

| | |
|---------|---|
| General | The current is determined by the fuse used, the voltage by the selected LED display. Permissible continuous load in accordance with ISO 8820-2:2015 (E) is max. 70% of the nominal current of the fuse. For short-circuit protection use only. |
|---------|---|

Product properties

| | |
|-----------------------|---------------------|
| Product type | Fuse terminal block |
| Number of connections | 2 |
| Number of rows | 1 |
| Potentials | 1 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|---------------------|
| Fuse type | Blade |
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 1.31 W |
| Fuse | Type C / max. 2.2 W |

Connection data

| | |
|---|---|
| Number of connections per level | 2 |
| Nominal cross section | 6 mm ² |
| Rated cross section AWG | 10 |
| Stripping length | 10 mm ... 12 mm |
| Internal cylindrical gage | A5 |
| Connection in acc. with standard | IEC 60947-7-3 |
| Conductor cross section rigid | 0.5 mm ² ... 10 mm ² |
| Cross section AWG | 20 ... 8 (converted acc. to IEC) |
| Conductor cross section flexible | 0.5 mm ² ... 10 mm ² |
| Conductor cross section, flexible [AWG] | 20 ... 8 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.5 mm ² ... 6 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 2.5 mm ² When using TWIN ferrules, we recommend a minimum ferrule length of 13 mm. |
| Nominal current | 25 A (with 4 mm ² conductor cross section) |
| Maximum load current | 30 A (In separate arrangement with 4 mm ² conductor cross section) |
| Nominal voltage | 400 V |
| Nominal cross section | 6 mm ² |

PT 6-FSI/C - Fuse modular terminal block



3212166

<https://www.phoenixcontact.com/au/products/3212166>

Connection cross sections directly pluggable

| | |
|---|------------------|
| Conductor cross section rigid | 1 mm² ... 10 mm² |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1 mm² ... 6 mm² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 1 mm² ... 6 mm² |

Dimensions

| | |
|--------------------|---------|
| Width | 8.2 mm |
| Height | 74.1 mm |
| Depth | 44 mm |
| Depth on NS 35/7,5 | 45.5 mm |
| Depth on NS 35/15 | 53 mm |

Material specifications

| | |
|--|------------------|
| Color | black (RAL 9005) |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Oscillation/broadband noise

| | |
|------------------------|--|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Spectrum | Long life test category 1, class B, body mounted |
| Frequency | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$ |
| ASD level | $0.964 \text{ (m/s}^2\text{)}^2\text{/Hz}$ |
| Acceleration | 0.58g |
| Test duration per axis | 5 h |
| Test directions | X-, Y- and Z-axis |
| Result | Test passed |

Shocks

PT 6-FSI/C - Fuse modular terminal block



3212166

<https://www.phoenixcontact.com/au/products/3212166>

| | |
|--------------------------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape | Half-sine |
| Acceleration | 5g |
| Shock duration | 30 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result | Test passed |

Ambient conditions

| | |
|--|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

Mounting

| | |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
| | NS 35/15 |

PT 6-FSI/C - Fuse modular terminal block




3212166

<https://www.phoenixcontact.com/au/products/3212166>

Drawings

Application drawing

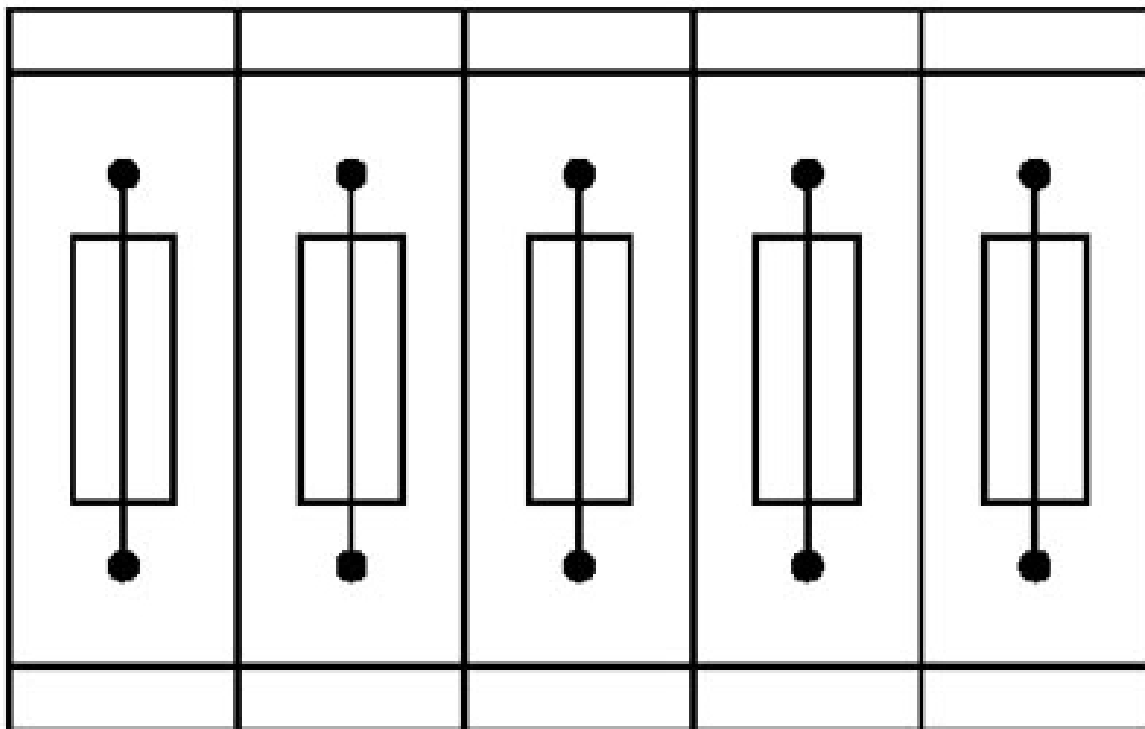

Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks


PT 6-FSI/C - Fuse modular terminal block



3212166

<https://www.phoenixcontact.com/au/products/3212166>

Application drawing

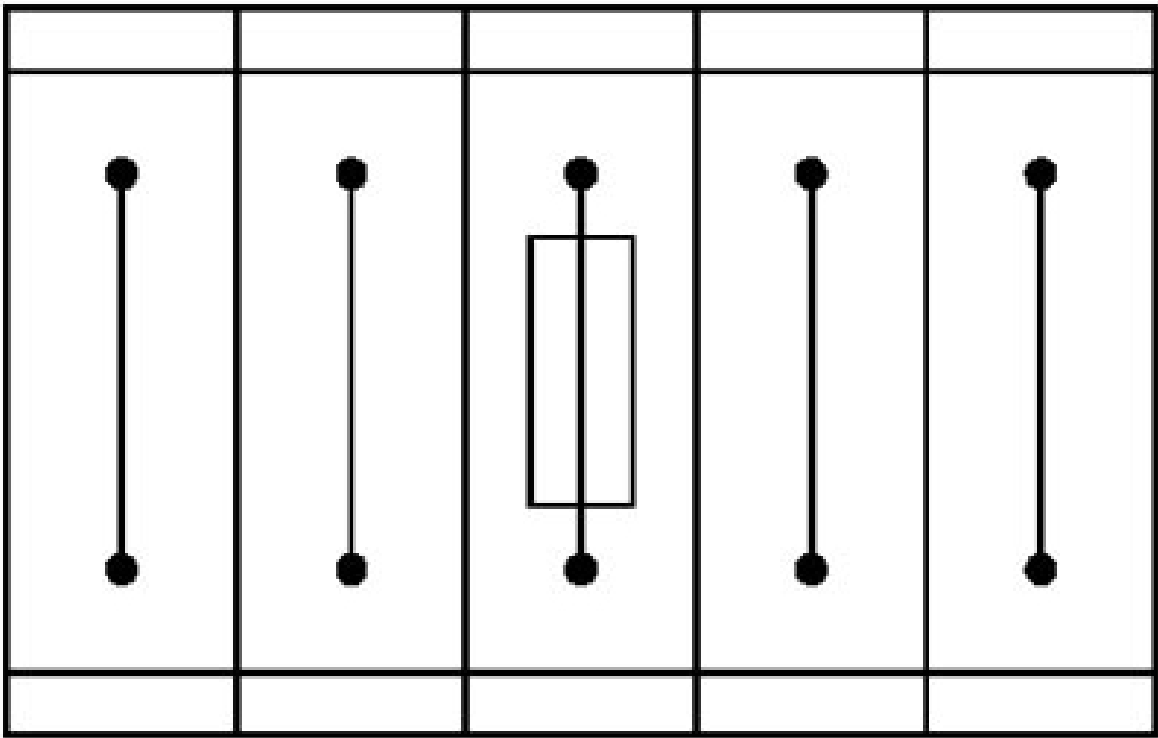

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks


PT 6-FSI/C - Fuse modular terminal block

3212166

<https://www.phoenixcontact.com/au/products/3212166>



Circuit diagram

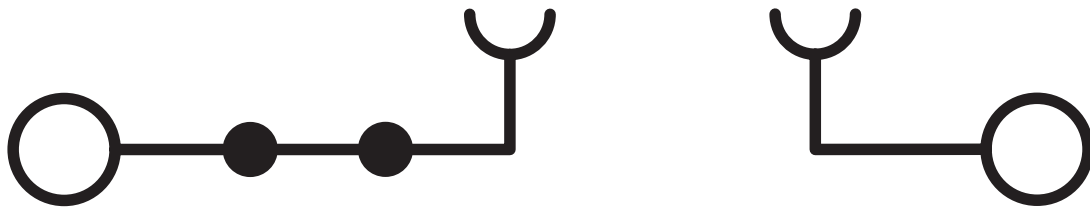

PT 6-FSI/C - Fuse modular terminal block




3212166


<https://www.phoenixcontact.com/au/products/3212166>


Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3212166>


|  CSA Approval ID: 13631 | | | | |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
| | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
| Use group B | 300 V | 25 A | 20 - 8 | - |
| | | | | |
| Use group C | 300 V | 25 A | 20 - 8 | - |
| | | | | |
| Use group D | 600 V | 5 A | 20 - 8 | - |
| | | | | |

| | | | | |
|---|--|--|--|--|
|  EAC Approval ID: RU C-DE.BL08.B.00644 | | | | |
|---|--|--|--|--|

| | | | | |
|--|--|--|--|--|
|  cULus Recognized Approval ID: E60425 | | | | |
|--|--|--|--|--|

| | | | | |
|--|--|--|--|--|
|  cULus Recognized Approval ID: E60425 | | | | |
|--|--|--|--|--|

| | | | | |
|--|--|--|--|--|
|  cULus Recognized Approval ID: E60425 | | | | |
|--|--|--|--|--|

| | | | | |
|---|--|--|--|--|
|  EAC Approval ID: KZ7500651131219505 | | | | |
|---|--|--|--|--|

PT 6-FSI/C - Fuse modular terminal block



3212166

<https://www.phoenixcontact.com/au/products/3212166>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27250113 |
|-------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

PT 6-FSI/C - Fuse modular terminal block



3212166
<https://www.phoenixcontact.com/au/products/3212166>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au