


# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distribution block, nom. voltage: 500 V, nominal current: 17.5 A, number of connections: 19, connection method: Push-in connection, Load contact, cross section: 0.14 mm<sup>2</sup> - 2.5 mm<sup>2</sup>, Line contact, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: violet

## Your advantages

- Convenient test options, thanks to test openings at every terminal point
- Space-saving potential distribution, thanks to compact micro potential distributors
- Flexible use, thanks to DIN rail and direct mounting
- Space-saving, thanks to the compact design
- Clear arrangement thanks to marking of all terminal points

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1047462             |
| Packing unit                         | 20 pc               |
| Minimum order quantity               | 20 pc               |
| Sales key                            | BEA124              |
| Product key                          | BEA124              |
| Catalog page                         | Page 437 (C-1-2019) |
| GTIN                                 | 4055626665672       |
| Weight per piece (including packing) | 23.07 g             |
| Weight per piece (excluding packing) | 22.22 g             |
| Customs tariff number                | 85369010            |
| Country of origin                    | PL                  |

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

## Technical data

### Notes

#### General

|      |                                                                                                                                                          |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note | The maximum load current of a single clamping unit must not be exceeded.                                                                                 |
|      | For power distribution applications, IEC 60364-4-43:2008; modified + corrigendum Okt. 2008 (DIN VDE 0100-430:2010-10) section 433.2 ff must be observed! |

### Product properties

|                       |                            |
|-----------------------|----------------------------|
| Product type          | Distributor terminal block |
| Number of connections | 19                         |
| Number of rows        | 1                          |

#### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.56 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Service Entrance                | yes                 |
| Number of connections per level | 19                  |
| Nominal cross section           | 1.5 mm <sup>2</sup> |
| Rated cross section AWG         | 14                  |

#### Load contact

|                                                                   |                                                           |
|-------------------------------------------------------------------|-----------------------------------------------------------|
| Stripping length                                                  | 8 mm ... 10 mm                                            |
| Internal cylindrical gage                                         | A3                                                        |
| Connection in acc. with standard                                  | IEC 60947-7-1                                             |
| Conductor cross section rigid                                     | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>              |
| Cross section AWG                                                 | 26 ... 14 (converted acc. to IEC)                         |
| Conductor cross section flexible                                  | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>              |
| Conductor cross section, flexible [AWG]                           | 26 ... 14 (converted acc. to IEC)                         |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>              |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>              |
| Nominal current                                                   | 17.5 A                                                    |
| Maximum load current                                              | 22 A (with a 2.5 mm <sup>2</sup> conductor cross section) |
| Maximum total current                                             | 32 A                                                      |
| Nominal voltage                                                   | 500 V                                                     |

#### Line contact

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

|                                                                   |                                                       |
|-------------------------------------------------------------------|-------------------------------------------------------|
| Stripping length                                                  | 10 mm ... 12 mm                                       |
| Connection in acc. with standard                                  | IEC 60998-2-2                                         |
| Conductor cross section rigid                                     | 0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>             |
| Cross section AWG                                                 | 24 ... 10 (converted acc. to IEC)                     |
| Conductor cross section flexible                                  | 0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>             |
| Conductor cross section, flexible [AWG]                           | 24 ... 10 (converted acc. to IEC)                     |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Nominal current                                                   | 41 A                                                  |
| Maximum load current                                              | 41 A (with 6 mm <sup>2</sup> conductor cross section) |
| Maximum total current                                             | 41 A                                                  |
| Nominal cross section                                             | 4 mm <sup>2</sup>                                     |

## Load contact Connection cross sections directly pluggable

|                                                                   |                                              |
|-------------------------------------------------------------------|----------------------------------------------|
| Conductor cross section rigid                                     | 0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |

## Line contact Connection cross sections directly pluggable

|                                                                   |                                            |
|-------------------------------------------------------------------|--------------------------------------------|
| Conductor cross section rigid                                     | 0.34 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Conductor cross section, rigid [AWG]                              | 24 ... 12 (converted acc. to IEC)          |
| Conductor cross section flexible                                  | 0.34 mm <sup>2</sup> ... 4 mm <sup>2</sup> |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>  |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>  |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 21.6 mm |
| Height             | 58.1 mm |
| Depth on NS 15     | 26.4 mm |
| Depth on NS 35/7,5 | 28.4 mm |

## Material specifications

|                                                                         |                   |
|-------------------------------------------------------------------------|-------------------|
| Color                                                                   | violet (RAL 4005) |
| Flammability rating according to UL 94                                  | V0                |
| Insulating material group                                               | I                 |
| Insulating material                                                     | PA                |
| Static insulating material application in cold                          | -60 °C            |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C            |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C            |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3       |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3       |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3       |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3       |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 27,5 MJ/kg        |

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

|                                                         |        |
|---------------------------------------------------------|--------|
| Surface flammability NFPA 130 (ASTM E 162)              | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C)                  | passed |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV      |
| Result                | Test passed |

### Temperature-rise test

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Requirement temperature-rise test | Increase in temperature $\leq 45$ K |
| Result                            | Test passed                         |
| Result                            | Test passed                         |

### Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV     |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35/NS 15 |
| Test force setpoint     | 5 N         |
| Result                  | Test passed |

## Environmental and real-life conditions

### Aging

|                    |             |
|--------------------|-------------|
| Temperature cycles | 192         |
| Result             | Test passed |

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|               |                                           |
|---------------|-------------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2018-05       |
| Spectrum      | Long life test category 2, bogie-mounted  |
| Frequency     | $f_1 = 5$ Hz to $f_2 = 250$ Hz            |
| ASD level     | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz |

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

|                        |                   |
|------------------------|-------------------|
| Acceleration           | 3.12g             |
| Test duration per axis | 5 h               |
| Test directions        | X-, Y- and Z-axis |
| Result                 | Test passed       |

## Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2018-05 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 30g                                 |
| Shock duration                 | 18 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

## Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations


|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|                                  | IEC 60998-2-2 |

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

## Drawings

Circuit diagram

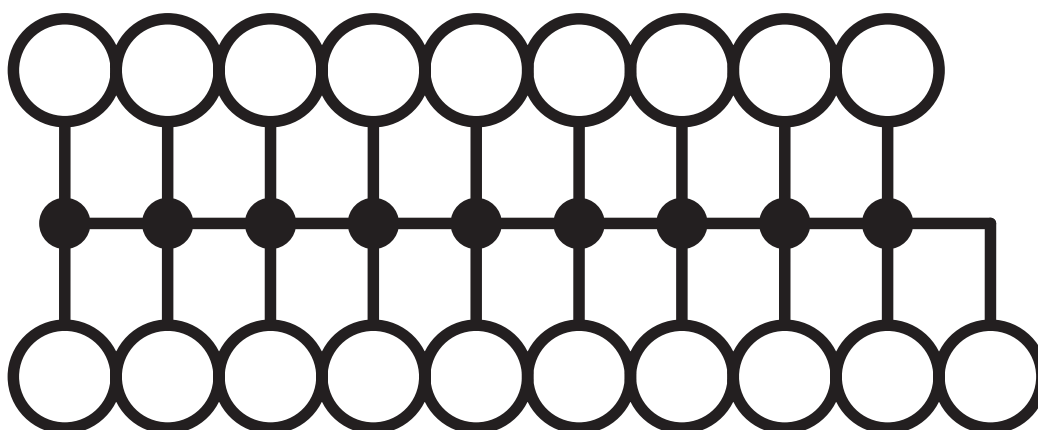

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1047462>

| DNV<br>Approval ID: TAE00002TT-05 |                       |                       |                   |                             |
|-----------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                   | 500 V                 | 24 A                  | -                 | -                           |

| CSA<br>Approval ID: 13631 |                       |                       |                   |                             |
|---------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                           | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B               |                       |                       |                   |                             |
| Output                    | 300 V                 | 20 A                  | 26 - 12           | -                           |
| Input                     | 300 V                 | 30 A                  | 24 - 10           | -                           |
| Use group C               |                       |                       |                   |                             |
| Output                    | 150 V                 | 20 A                  | 26 - 12           | -                           |
| Input                     | 150 V                 | 30 A                  | 24 - 10           | -                           |

| CB<br>IECEE CB Scheme<br>Approval ID: DE1-62701 |                       |                       |                   |                             |
|-------------------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                                 | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|                                                 | 500 V                 | 32 A                  | -                 | - 4                         |

| EAC<br>Approval ID: RU C-DE.BL08.B.00644 |  |  |  |  |
|------------------------------------------|--|--|--|--|
|------------------------------------------|--|--|--|--|

| BV<br>Approval ID: 59146/A0 BV |  |  |  |  |
|--------------------------------|--|--|--|--|
|--------------------------------|--|--|--|--|

| VDE Zeichengenehmigung<br>Approval ID: 40047797 |  |  |  |  |
|-------------------------------------------------|--|--|--|--|
|-------------------------------------------------|--|--|--|--|

| cULus Recognized<br>Approval ID: E60425 |                       |                       |                   |                             |
|-----------------------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
|                                         | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B                             |                       |                       |                   |                             |
| Output                                  | 300 V                 | 20 A                  | 26 - 12           | -                           |
| Input                                   | 300 V                 | 30 A                  | 24 - 10           | -                           |
| Use group C                             |                       |                       |                   |                             |

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

|        |       |      |         |   |
|--------|-------|------|---------|---|
| Output | 150 V | 20 A | 26 - 12 | - |
| Input  | 150 V | 30 A | 24 - 10 | - |



EAC

Approval ID: KZ7500651131219505

# PTFIX 4/18X1,5-NS35 VT - Distribution block



1047462

<https://www.phoenixcontact.com/au/products/1047462>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250118 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

1047462  
<https://www.phoenixcontact.com/au/products/1047462>

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)