

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



2.4 GHz wireless transceiver with RS-485 interface, RSMA (female) antenna connection, point-to-point, star, and mesh networks up to 250 stations, range of up to 500 m (with a clear line of sight), for worldwide use

Product description

Due to high-frequency switching operations in PV systems, interference commonly occurs on communication cables. This means that interference-free monitoring of PV systems cannot always be ensured. Wireless communication in the 2.4 GHz band is immune to electromagnetic interference and is therefore ideal for use in PV systems. Using the new wireless modules, serial RS-485 cables can be easily and flexibly replaced with a secure, interference-free wireless connection.

Your advantages

- Flexible networking of wireless modules as a point-to-point, star or mesh connection
- Parallel operation of multiple PV arrays, thanks to comprehensive coexistence mechanisms
- Reliable, interference-free communication even over long distances, thanks to Trusted Wireless technology
- Intuitive startup, thanks to user-friendly software wizard
- License-free 2.4 GHz frequency band
- Reasonably-priced version

Commercial data

Item number	1081818
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNC614
Product key	DNC614
GTIN	4055626810065
Weight per piece (including packing)	138.1 g
Weight per piece (excluding packing)	110 g
Customs tariff number	85176200
Country of origin	DE

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties

Product type	Wireless module
Application	RS-485
Operating mode	Serial data (Activation and configuration via PSI-CONF software)
MTTF	1064 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	492 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	196 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Maximum power dissipation for nominal condition	1.152 W
Transient surge protection	yes

System limits

Designation	Wireless module
Number of supported devices	≤ 250 (Addressing via PSI-CONF software)

Supply

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30.5 V DC
Max. current consumption	≤ 48 mA (at 24 V DC, at 25 °C)

Connection data

Connection method	Screw connection
Stripping length	7 mm
Conductor cross section, rigid min.	0.2 mm²
Conductor cross section, rigid max.	2.5 mm²
Conductor cross section flexible min.	0.2 mm²
Conductor cross section flexible max.	2.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

Interfaces

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Wireless

Range	≤ 500 m (The range may be considerably above or below that stated, and depends on the environment, antenna technology, and the product used)
-------	--

Serial: RS-485

Data rate	300 bps / 600 bps / 1.2 kbps / 2.4 kbps / 4.8 kbps / 9.6 kbps / 19.2 kbps / 38.4 kbps / 57.6 kbps / 93.75 kbps / 115.2 kbps
Connection method	COMBICON plug-in screw terminal block
Connection technology	2-conductor
Transmission length	≤ 1200 m
Termination resistor	390 Ω (switchable via DIP switches)
	150 Ω (switchable via DIP switches)
	390 Ω (switchable via DIP switches)

Serial: Configuration interface

Connection method	S-PORT (socket)
-------------------	-----------------

Wireless

Interface description	Trusted Wireless
Direction	Bi-directional
Frequency	2400 MHz
Frequency range	2.4002 GHz ... 2.4785 GHz
Channel distance	1.3 MHz
Number of channel groups	8
Number of channels per group	55
Transmit capacity, minimum	0 dBm
Transmit capacity, maximum	≤ 18 dBm (can be set via software)
Data rate	16 kbps (adjustable)
	125 kbps (Default setting, adjustable)
	250 kbps (adjustable)
Minimum receiver sensitivity	-106 dBm (16 kbps)
	-96 dBm (125 kbps)
	-93 dBm (250 kbps)
Antenna connection method	RSMA (female)

Functions

Wireless licenses	Europe, USA, Canada, additional countries in the e-shop
-------------------	---

Wireless

Frequency band	2.4 GHz
Wireless standard	Trusted Wireless

Signaling

Status display	LED supply voltage, PWR (green)
	LED yellow (reception quality, LINK)
	Green LED (receive data, RX)

RAD-EE-2400-RS485 - Wireless module




1081818

<https://www.phoenixcontact.com/au/products/1081818>

Green LED (transmit data, TX)

Dimensions

Dimensional drawing



Width	17.5 mm
Height	116 mm
Depth	114.5 mm

Material specifications

Color (Housing)	traffic grey B (RAL 7043)
Material (Housing)	PA 6.6-FR
Flammability rating according to UL 94	V0

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 70 °C -4 °F ... 158 °F
Ambient temperature (storage/transport)	-20 °C ... 70 °C -4 °F ... 158 °F
Altitude	2000 m
Permissible humidity (operation)	20 % ... 85 %
Permissible humidity (storage/transport)	20 % ... 85 %
Shock	16g, 11 ms
Vibration (operation)	in accordance with IEC 60068-2-6: 5g, 10 Hz ... 150 Hz

Approvals

CE

Certificate	CE-compliant
-------------	--------------

UL, USA/Canada

Identification	508 Listed
----------------	------------

Wireless approval, Europe

Note	RED 2014/53/EU
------	----------------

Wireless approval Australia, RCM

Certificate	-
-------------	---

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Wireless approval Brazil, ANATEL

Certificate	06279-19-06497
-------------	----------------

Wireless approval India, WPC

Certificate	NER-ETA/314
-------------	-------------

Wireless approval Mexico, IFT

Certificate	RCPPHRA20-0068
-------------	----------------

KC approval for South Korea

Certificate	MSIP-CRI-PCK-2901541
-------------	----------------------

EMC data

Electromagnetic compatibility	Conformance with RED Directive 2014/53/EU
-------------------------------	---

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV (Test Level 3)
Discharge in air	± 8 kV (Test Level 3)
Indirect discharge	± 6 kV
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	26 MHz ... 3 GHz (Test Level 3)
Field intensity	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	± 2 kV (Test Level 3)
Signal	± 2 kV
Comments	Criterion B

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

Input	± 0.5 kV (symmetrical)
	± 1 kV (asymmetrical)
Signal	± 1 kV (asymmetrical)
Comments	Criterion B

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V

Emitted interference

Emitted radio interference in acc. with EN 55011	EN 55016-2-3 Class A industrial applications
--	--

Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

Standards and regulations

Standard designation	RED directive 2014/53/EU
Standards/specifications	EN 300328
	EN 61000-6-4
	EN 61000-6-2
	EN 50371
	EN 60950-1

Mounting

Mounting type	DIN rail mounting
Assembly note	on standard DIN rail NS 35 in accordance with EN 60715

RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>



Drawings

Dimensional drawing



Slim design


RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>




Application drawing

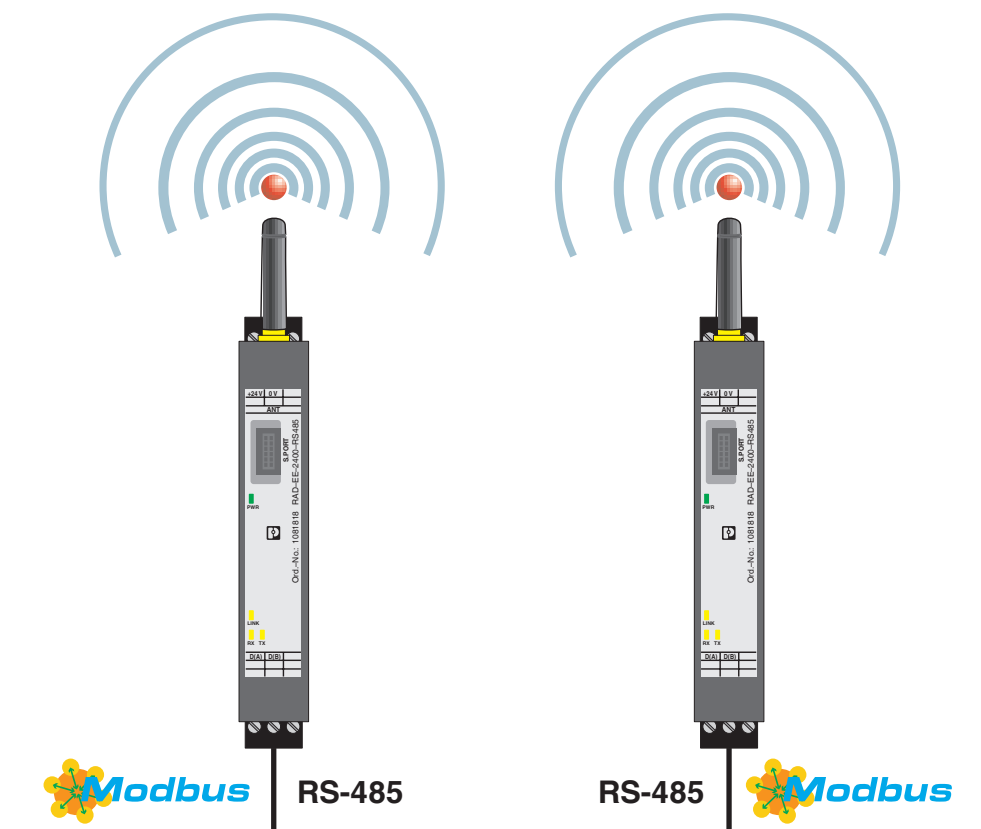

Point-to-point connection

Application drawing

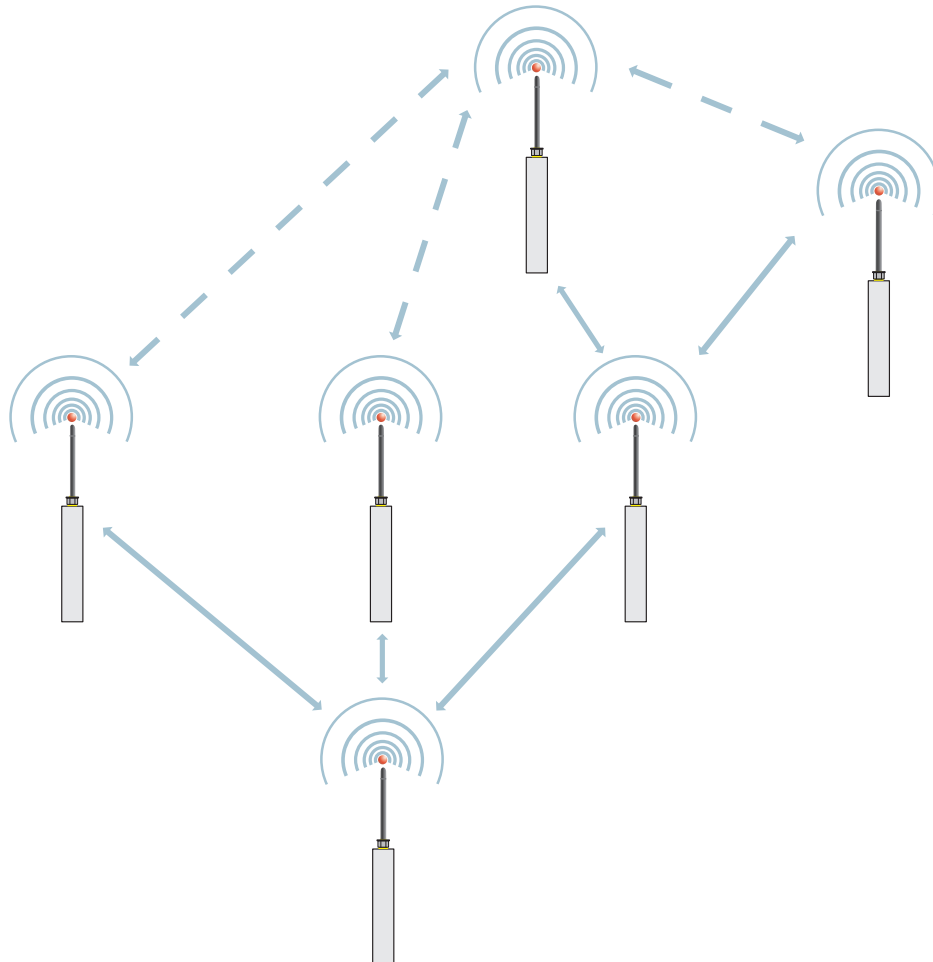

Mesh network


RAD-EE-2400-RS485 - Wireless module



1081818


<https://www.phoenixcontact.com/au/products/1081818>

Application drawing

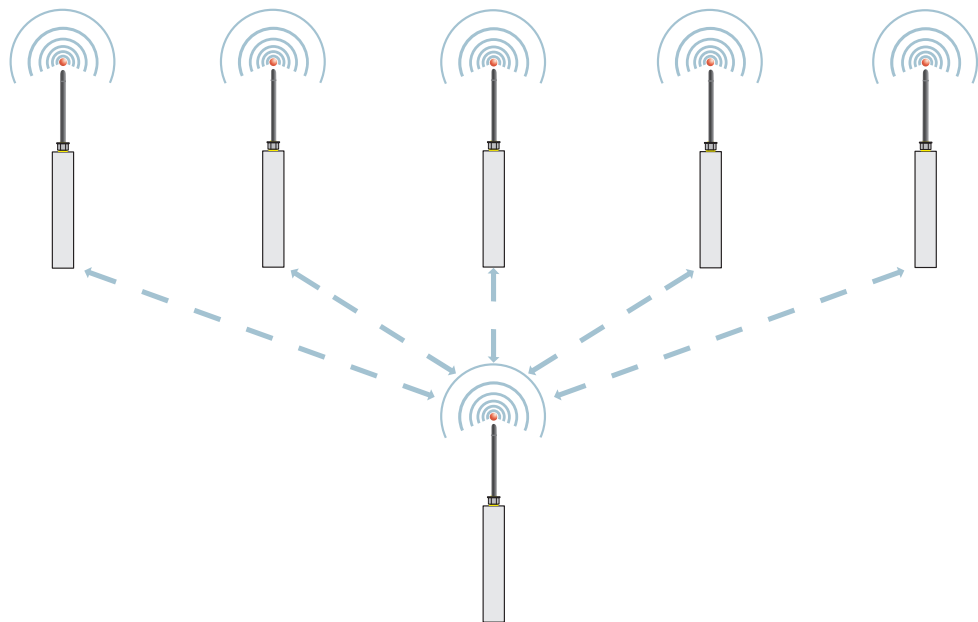

Star structure

Connection diagram

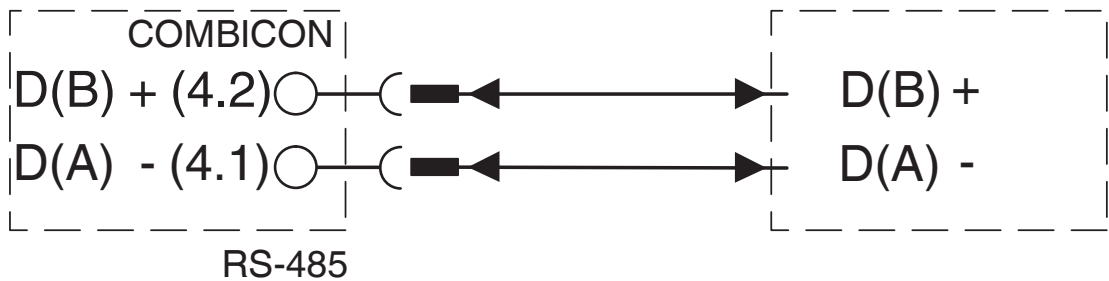

RS-485 connection


RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>



Schematic diagram

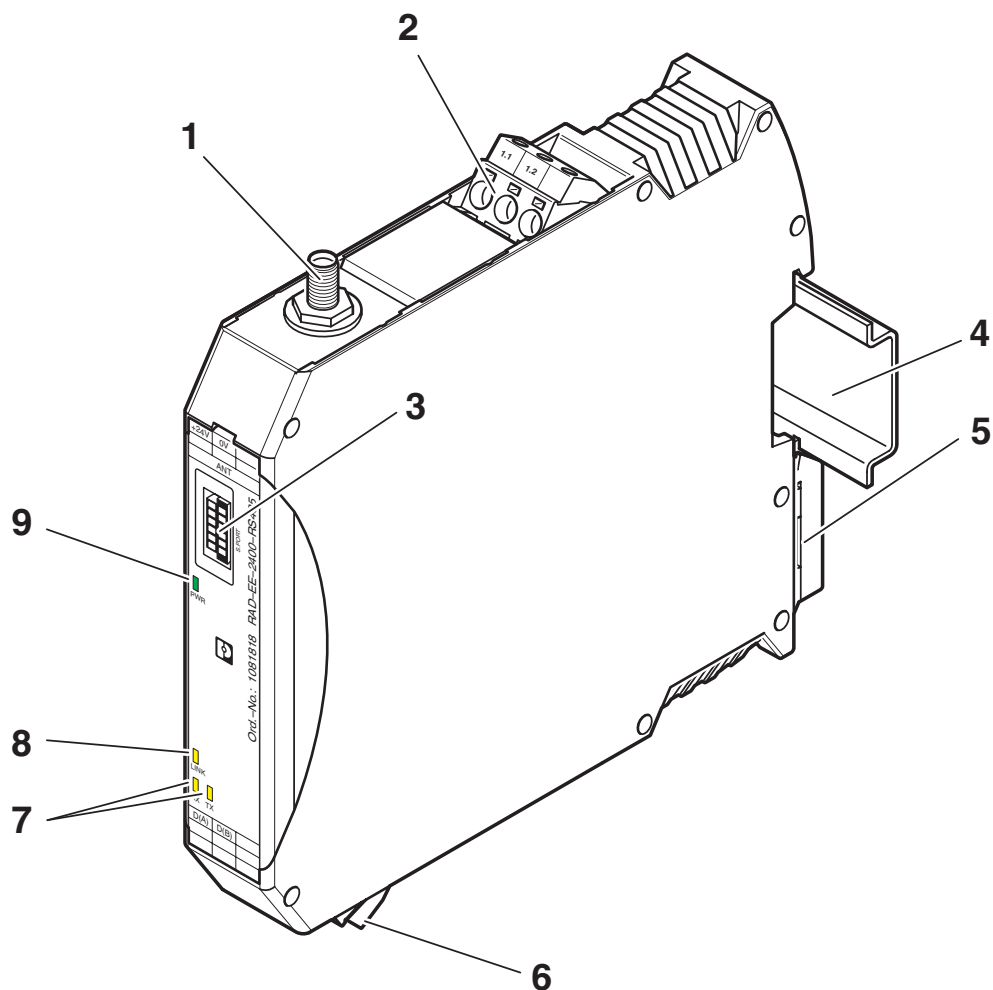

Function elements


RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>



Schematic diagram

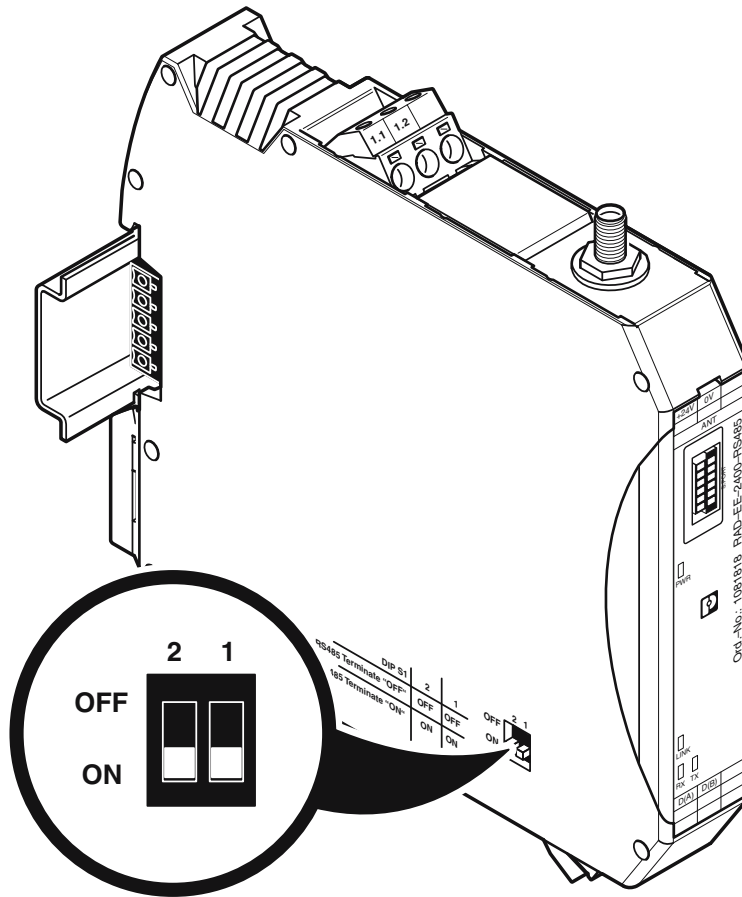

DIP switches


RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>



Schematic diagram

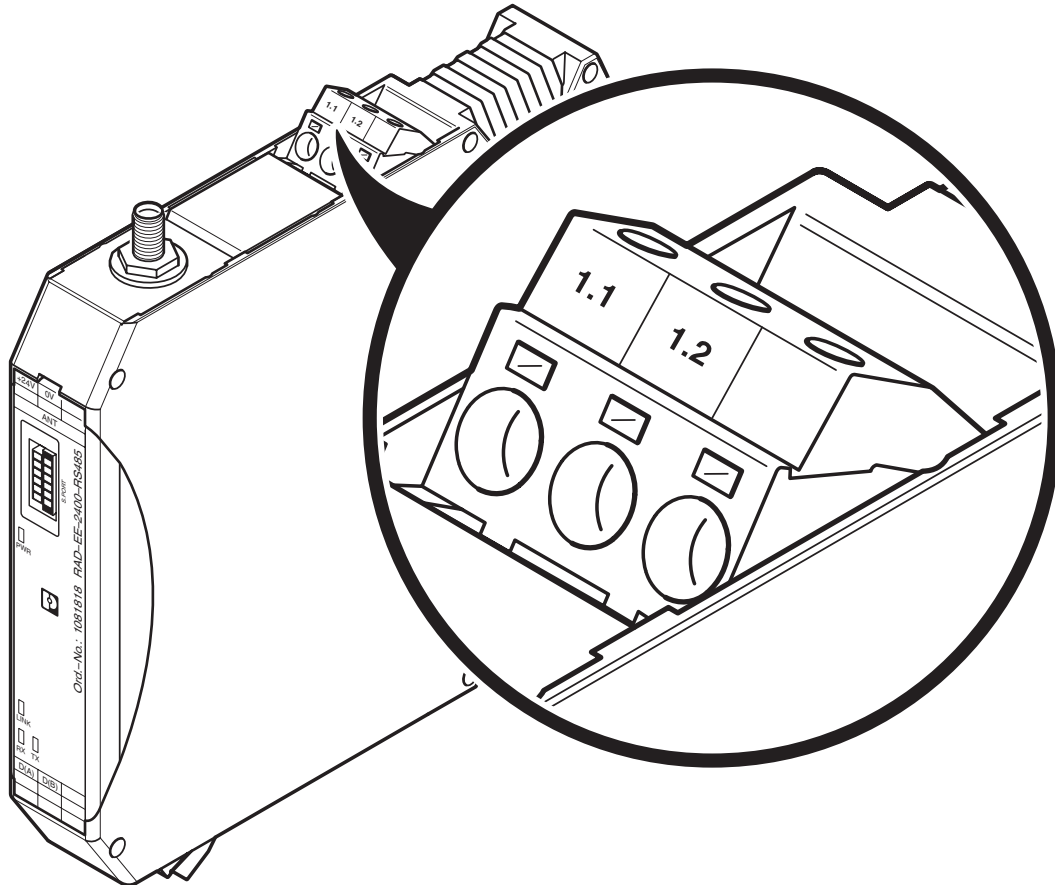


Power supply

RAD-EE-2400-RS485 - Wireless module

1081818

<https://www.phoenixcontact.com/au/products/1081818>

Block diagram

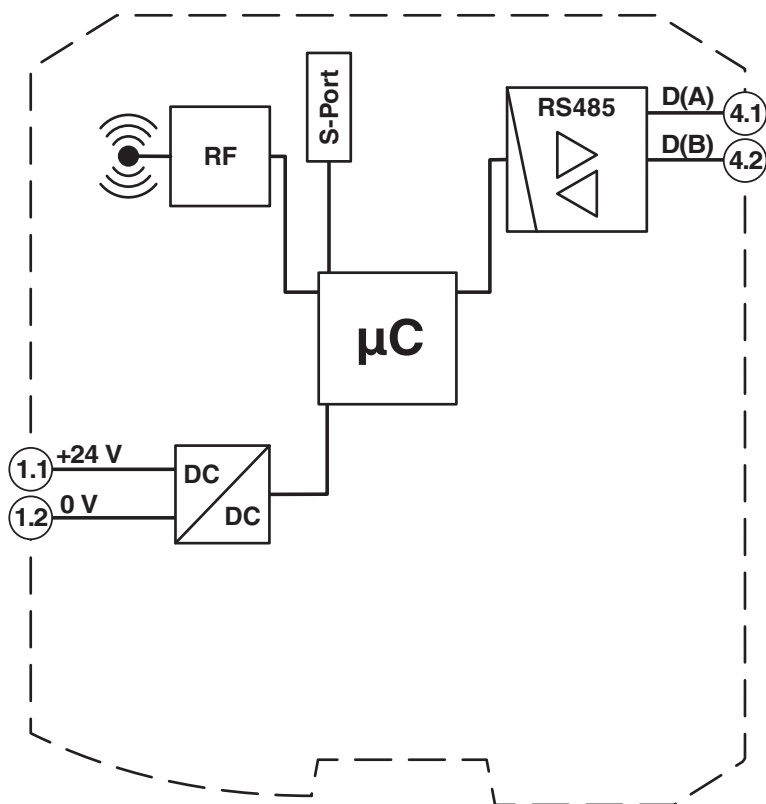

Basic circuit diagram

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1081818>



UL Listed
Approval ID: E238705



cUL Listed
Approval ID: E238705



KC
Approval ID: MSIP-CRI-PCK-2901541

ANATEL
Approval ID: 06279-19-06497

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Classifications

ECLASS

ECLASS-13.0	19179090
-------------	----------

ETIM

ETIM 9.0	EC000310
----------	----------

UNSPSC

UNSPSC 21.0	43222600
-------------	----------

RAD-EE-2400-RS485 - Wireless module



1081818

<https://www.phoenixcontact.com/au/products/1081818>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7d7b1b86-9926-42ae-9a9a-dc21b1e79c34

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

customerservice@phoenixcontact.com.au