

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power connector, Power, 4-position, unshielded, Socket straight M12, coding: T, Push-lock spring connection, knurl material: Brass, nickel-plated, external cable diameter 6 mm ... 11 mm

## Your advantages

- Time-saving Push-Lock connection: Tool-free connection and disconnection of conductors by opening the contact levers
- Intuitive connection: Easy assignment of individual litz wires with color-coded and numerical identification of the contact levers
- Integrated Push-in Technology: Wire rigid and pretreated conductors easily by means of simple, direct insertion
- Shock- and vibration-resistant connection: Proven spring-cage technology guarantees secure and reliable contacting
- Protected seal in the M12 socket

## Commercial data

Item number	1151366
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AF2CEP
Product key	AF2CEP
GTIN	4063151148522
Weight per piece (including packing)	90.95 g
Weight per piece (excluding packing)	90.95 g
Customs tariff number	85366990
Country of origin	DE

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

## Technical data

### Notes

Assembly note	<b>NOTE:</b> Observe the permissible bending radii when routing cables, since the degree of protection may be at risk if the bending forces are too high. Reduce mechanical loads upstream of the connector, e.g., by using cable ties.
---------------	---

### Mounting

Assembly note	The wires can be connected both with ferrules and without ferrules
---------------	--


### Product properties

Product type	Circular connector (cable-side)
Application	Power supply
Sensor type	Power
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	T
Cable outlet	straight

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

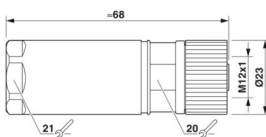Dimensional drawing	
Length	68 mm

### External dimensions

Outside diameter	6 mm ... 11 mm
------------------	----------------

### Housing

Diameter housing	23 mm
------------------	-------

### Material specifications

Flammability rating according to UL 94	V0
Material of grip body	Brass, nickel-plated
Contact surface material	Au
Material for screw connection	Brass, nickel-plated

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

## Connection data

### Conductor connection

Connection method	Push-lock spring connection
Connection cross section	1.5 mm² ... 2.5 mm²
	0.75 mm² ... 2.5 mm² (with ferrule)
	1.5 mm² ... 1.5 mm² (solid)
Connection cross section AWG	16 ... 14 (without ferrule)
	18 ... 14 (with ferrule)
Stripping length of the individual wire	10 mm
Tightening torque	0.6 Nm (M12 knurl)
	5 Nm (Pressure nut with connector housing)

### Pin assignment

Contact   Color (signal designation)   Contact (optional)	1 = BN
	2 = WH
	3 = BU
	4 = BK

## Electrical properties

Rated surge voltage	1.5 kV
Nominal voltage $U_N$	63 V DC
Nominal current $I_N$	12 A (when using 1.5 mm² conductors)
	12 A (at 40 °C)

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 100
-----------------------------	-------

## Connector

### Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	T

## Cable/line

Signal type/category	Power
Stripping length of the individual wire	10 mm

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
----------------------	------

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

Ambient temperature (operation) (male connector/female connector)
---

-40 °C ... 85 °C (Plug / socket)
----------------------------------

## Standards and regulations

Standard designation
----------------------

M12 connector
---------------

Standards/specifications
--------------------------

according to IEC 61076-2-111
------------------------------

## SACC-M12FST-4PL-CM - Power connector


1151366

<https://www.phoenixcontact.com/au/products/1151366>




## Drawings

## Dimensional drawing

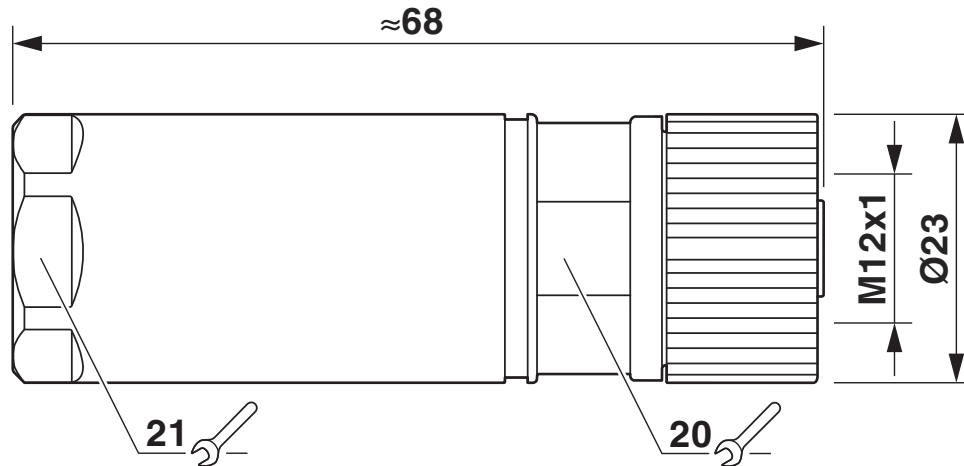

M12 x 1 socket, straight


## Functional drawing

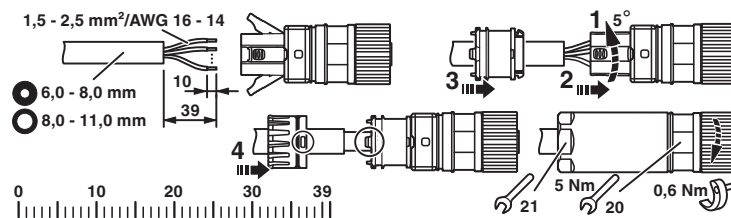

1151366

<https://www.phoenixcontact.com/au/products/1151366>

Schematic diagram

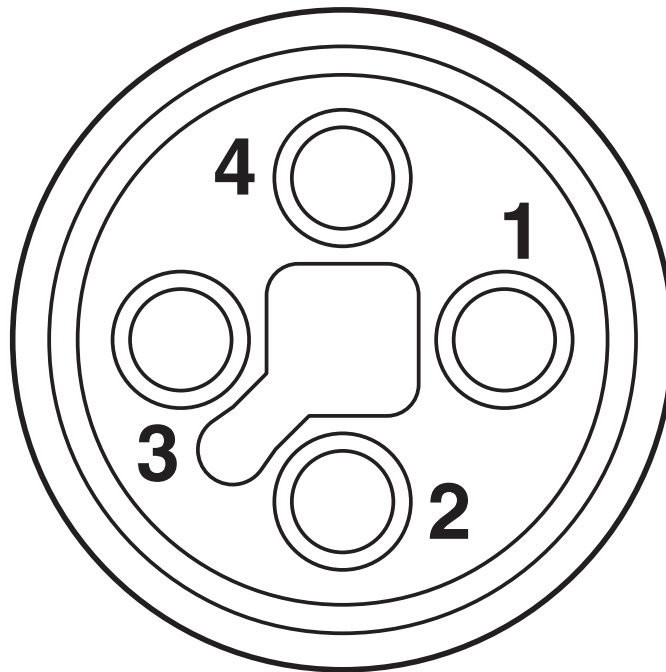

Pin assignment of M12 socket, 4-pos., T-coded, socket side view

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

## Classifications

### ECLASS

ECLASS-13.0	27440116
-------------	----------

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-M12FST-4PL-CM - Power connector



1151366

<https://www.phoenixcontact.com/au/products/1151366>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)