

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors, and light grids up to SIL 3, Cat. 4, PL e, 1 or 2-channel operation, automatic start, 2 enabling current paths (1-channel),  $U_S = 24 \text{ V DC}$ , fixed screw terminal block

## Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Low housing width of just 6.8 mm
- 2 channel control
- 2 single-channel enabling current paths
- Automatic activation

## Commercial data

Item number	2904958
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA171
Product key	DNA171
Catalog page	Page 219 (C-6-2019)
GTIN	4046356904889
Weight per piece (including packing)	82 g
Weight per piece (excluding packing)	68.188 g
Customs tariff number	85371098
Country of origin	DE

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Safety relays
Product family	PSRmini
Application	Emergency stop
	Safety door
	Light grid
	Magnetic switch
	Transponder
Control	1 and 2 channel
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

### Insulation characteristics

Overvoltage category	III
Degree of pollution	2

### Times

Typical response time	< 175 ms
Typ. starting time with $U_S$	< 250 ms (when controlled via A1)
Typical release time	< 20 ms (when controlled via A1 or S12 and S22.)
Restart time	1 s (Boot time, after switching on the supply voltage)
Recovery time	< 500 ms

### Electrical properties

Maximum power dissipation for nominal condition	3 W ( $U_S = 26.4$ V, $I_L^2 = 36$ A <sup>2</sup> , $P_{Total\ max} = 1.2$ W + 1.8 W)
Nominal operating mode	100% operating factor
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	See data sheet, section "Insulation coordination".

### Supply

Designation	A1/A2
Rated control circuit supply voltage $U_S$	20.4 V DC ... 26.4 V DC
Rated control circuit supply voltage $U_S$	24 V DC -15 % / +10 %
Rated control supply current $I_S$	typ. 40 mA
Power consumption at $U_S$	typ. 0.96 W
Inrush current	4.5 A ( $\Delta t < 120$ $\mu$ s at $U_S$ )
Filter time	1 ms (at A1 in the event of voltage dips at $U_S$ )
Protective circuit	Surge protection; Suppressor diode
	Serial protection against polarity reversal

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

## Input data

Digital: Sensor circuit (S12, S22)

Description of the input	safety-related sensor inputs
Input voltage range "0" signal	0 V DC ... 5 V DC (for safe Off; at S12 and S22)
Input voltage range "1" signal	20.4 V DC ... 26.4 V DC
Input current range "0" signal	0 mA ... 2 mA (for safe Off; at S12 and S22)
Inrush current	< 20 mA (typ. with $U_S$ )
Filter time	max. 1.5 ms (Test pulse width of low test pulses) Test pulse rate = 5 x Test pulse width
Concurrency	$\infty$
Max. permissible overall conductor resistance	150 $\Omega$
Protective circuit	Suppressor diode
Voltage at input/start and feedback circuit	24 V DC -15 % / +10 %
Current consumption	< 5 mA (with $U_S/I_x$ to S12) < 5 mA (with $U_S/I_x$ to S22)

## Output data

Relay: Enabling current path (13/14, 23/24)

Output description	safety-related N/O contacts (1-channel)
Number of outputs	2 (undelayed)
Contact switching type	2 enabling current paths
Contact material	AgSnO <sub>2</sub>
Switching voltage	min. 12 V AC/DC max. 250 V AC/DC
Switching capacity	min. 60 mW
Inrush current	min. 3 mA max. 6 A
Limiting continuous current	max. 6 A
Sq. Total current	72 A <sup>2</sup> (observe derating)
Switching frequency	max. 0.1 Hz
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	6 A gL/gG (N/O contact) 4 A gL/gG (for low-demand applications)

## Connection data

Connection technology

pluggable	no
-----------	----

Conductor connection

Connection method	Screw connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

Conductor cross-section AWG	26 ... 12
Stripping length	12 mm
Screw thread	M3
Tightening torque	0.5 Nm ... 0.6 Nm

## Signaling

Status display	2 x LED (green)
Operating voltage display	1 x LED (green)

## Dimensions

Width	6.8 mm
Height	93.1 mm
Depth	102.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	PBT

## Characteristics

### Safety data

Stop category	0
---------------	---

### Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (4 A DC13; 2 A AC15; 8760 switching cycles/year)

### Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-40 °C ... 55 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

Vibration (operation)	10 Hz ... 150 Hz, 2g
-----------------------	----------------------

## Approvals

CE

Certificate	CE-compliant
-------------	--------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal


# PSR-MS60-2NO-24DC-SC - Safety relays

2904958


<https://www.phoenixcontact.com/au/products/2904958>

## Drawings

Application drawing

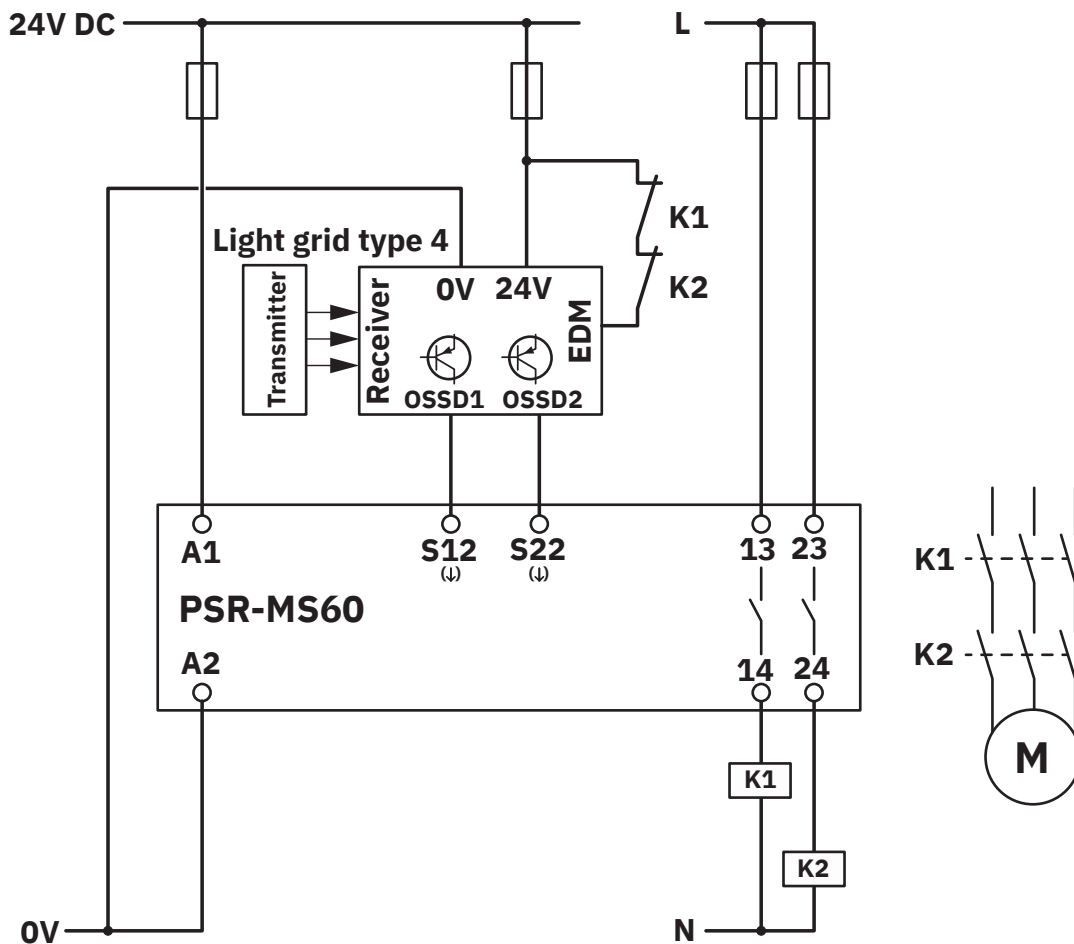

Block diagram

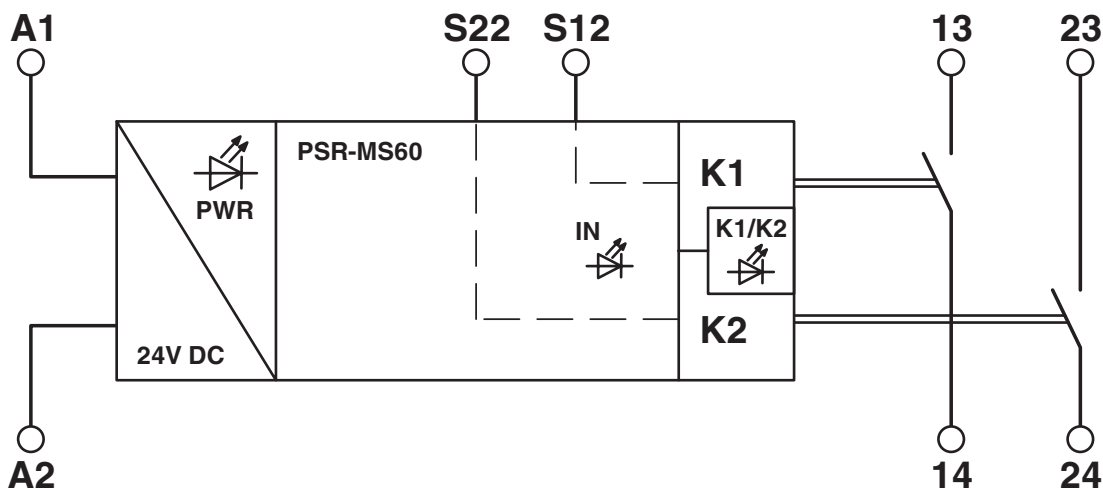

Block diagram


# PSR-MS60-2NO-24DC-SC - Safety relays

2904958

<https://www.phoenixcontact.com/au/products/2904958>

Block diagram

## PSR-MS60

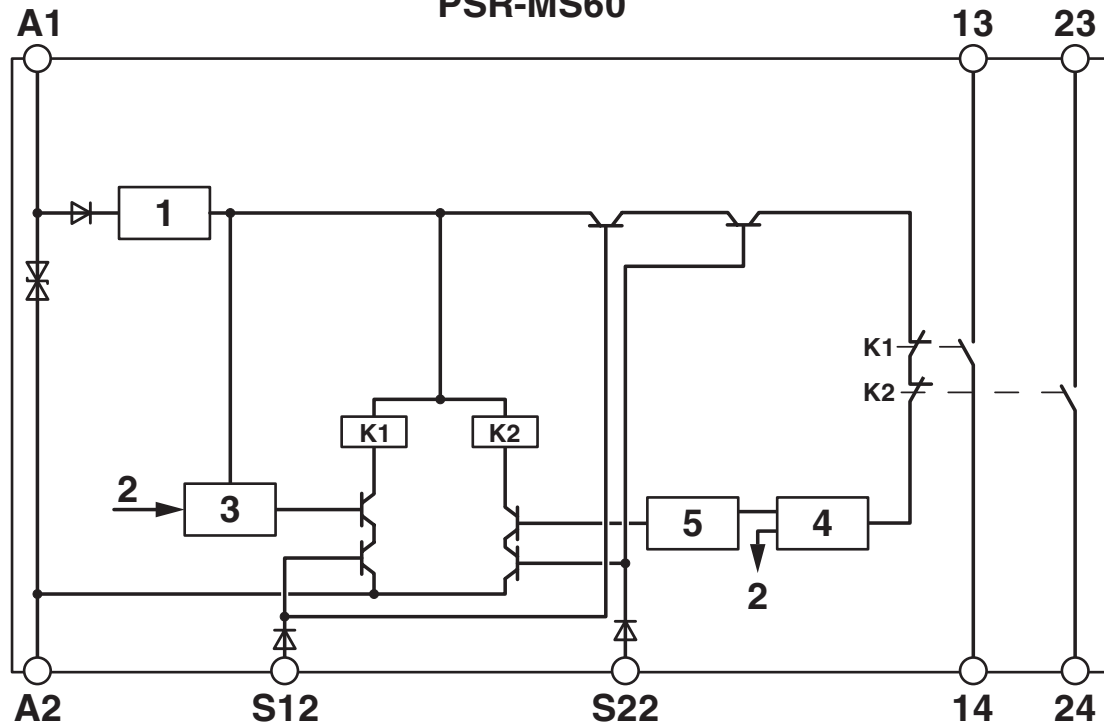

### Key:

- 1 = Voltage limitation
- 2 = Channel 1
- 3 = Control circuit channel 1
- 4 = Start channel 1 and 2
- 5 = Control circuit channel 2
- K1, K2 = Force-guided elementary relays


# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2904958>



### Functional Safety

Approval ID: 44 205 13755202



### cULus Listed

Approval ID: E140324



### Functional Safety

Approval ID: 44 780 13755207



# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

## Classifications

### ECLASS

ECLASS-13.0

27371819

### ETIM

ETIM 9.0

EC001449

### UNSPSC

UNSPSC 21.0

39122200

# PSR-MS60-2NO-24DC-SC - Safety relays



2904958

<https://www.phoenixcontact.com/au/products/2904958>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	56d78635-8cd2-4cb8-8997-bfc8194eeaff

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)