

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925

<https://www.phoenixcontact.com/au/products/2907925>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

Your advantages

- Surge protection family for universal use with optimum energy coordination from the lightning current arrester to the device protection
- Easy to maintain due to consistently pluggable protection modules
- Excellent level of information provided by mechanical/visual status indicator and remote indication contact
- Your preferred connection technology can be selected as both screw connection and Push-in connection are available
- Optimal additional protection of the industrial power supply for a longer service life and increased availability of the system

Commercial data

Item number	2907925
Packing unit	5 pc
Minimum order quantity	1 pc
Sales key	CL14A3
Product key	CL14A3
Catalog page	Page 82 (C-4-2019)
GTIN	4055626257495
Weight per piece (including packing)	91.22 g
Weight per piece (excluding packing)	77.16 g
Customs tariff number	85363030
Country of origin	DE

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925
<https://www.phoenixcontact.com/au/products/2907925>

Technical data

Product properties

Product type	Device protection
Product family	SEC Family
IEC power supply system	TN-S
Type	DIN rail module, two-section, divisible
Number of positions	2
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Overvoltage category	III
Pollution degree	2
IEC test classification	III
EN type	T3
Number of ports	One

Electrical properties

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	250 V AC
	125 V DC (200 mA DC)
Operating current	0.5 A AC
	0.5 A DC (75 V DC)

Connection data

Connection method	Push-in connection
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section rigid	0.2 mm² ... 4 mm²
Conductor cross section AWG	24 ... 12

Dimensions

Dimensional drawing	
Width	17.7 mm
Height	101 mm
Depth	74.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	1 Div.

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925

<https://www.phoenixcontact.com/au/products/2907925>

Material specifications

Color (Male connector)	light gray (RAL 7035)
Color (Base element)	gray (RAL 7042)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6-FR 20 % GF
	PA 6.6-FR
Housing material	PA 6.6-FR 20 % GF
	PA 6.6-FR

Protective circuit

Mode of protection	L-N
	L-PE
	N-PE
Direction of action	1L-N & N-PE
Nominal voltage U_N	24 V AC (TN-S)
Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_C	34 V AC
Rated load current I_L	26 A (at 30 °C)
Protective conductor current I_{PE}	$\leq 5 \mu A$
Standby power consumption P_C	$\leq 2.7 \text{ mVA}$ (at U_{REF})
	$\leq 4.8 \text{ mVA}$ (at U_C)
Reference test voltage U_{REF}	27 V AC
Nominal discharge current I_n (8/20) μs	1 kA
Combination wave U_{OC}	2 kV
Voltage protection level U_p (L-N)	$\leq 0.2 \text{ kV}$
Voltage protection level U_p (L-PE)	$\leq 0.6 \text{ kV}$
Voltage protection level U_p (N-PE)	$\leq 0.6 \text{ kV}$
TOV behavior at U_T (L-N)	50 V AC (120 min / withstand mode)
TOV behavior at U_T (L-PE)	50 V AC (120 min / withstand mode)
Response time t_A (L-N)	$\leq 25 \text{ ns}$
Response time t_A (L-PE)	$\leq 100 \text{ ns}$
Response time t_A (N-PE)	$\leq 100 \text{ ns}$
Short-circuit current rating I_{SCCR}	10 kA AC
Max. backup fuse with branch wiring	32 A (gG / B / C)

Additional technical data

Short-circuit current rating I_{SCCR}	0.25 kA DC (Without additional backup fuse in the DC branch wiring)
	5 kA DC (for 20 A gG / B backup fuse)
Maximum discharge current I_{max} (8/20) μs	4 kA
Nominal discharge current I_n (8/20) μs	3 kA
Residual voltage U_{res} (L-N)	$\leq 0.16 \text{ kV}$ (at 0.5 kA)
	$\leq 0.2 \text{ kV}$ (at 1 kA)

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925

<https://www.phoenixcontact.com/au/products/2907925>

Residual voltage U_{res} (L-PE)	$\leq 0.35 \text{ kV}$ (at 0.5 kA)
	$\leq 0.4 \text{ kV}$ (at 1 kA)
Residual voltage U_{res} (N-PE)	$\leq 0.35 \text{ kV}$ (at 0.5 kA)
	$\leq 0.4 \text{ kV}$ (at 1 kA)
Maximum continuous voltage U_{C}	44 V DC
Mode of protection	(DC+) - (DC-)
	(DC+/DC-) - PE

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	$\leq 2000 \text{ m}$ (operating voltage remote contact $\leq 250 \text{ V}$)
	$\leq 6000 \text{ m}$ (operating voltage remote contact $\leq 150 \text{ V}$)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	30g (Half-sine / 11 ms / 3x $\pm X$, $\pm Y$, $\pm Z$)
Vibration (operation)	5g (5 ... 500 Hz / 2.5 h / X, Y, Z)

Standards and regulations

Standards/specifications	IEC 61643-11
Note	2011

EN 61643-11

Standards/specifications	EN 61643-11
Note	2012

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device




2907925

<https://www.phoenixcontact.com/au/products/2907925>

Drawings

Dimensional drawing

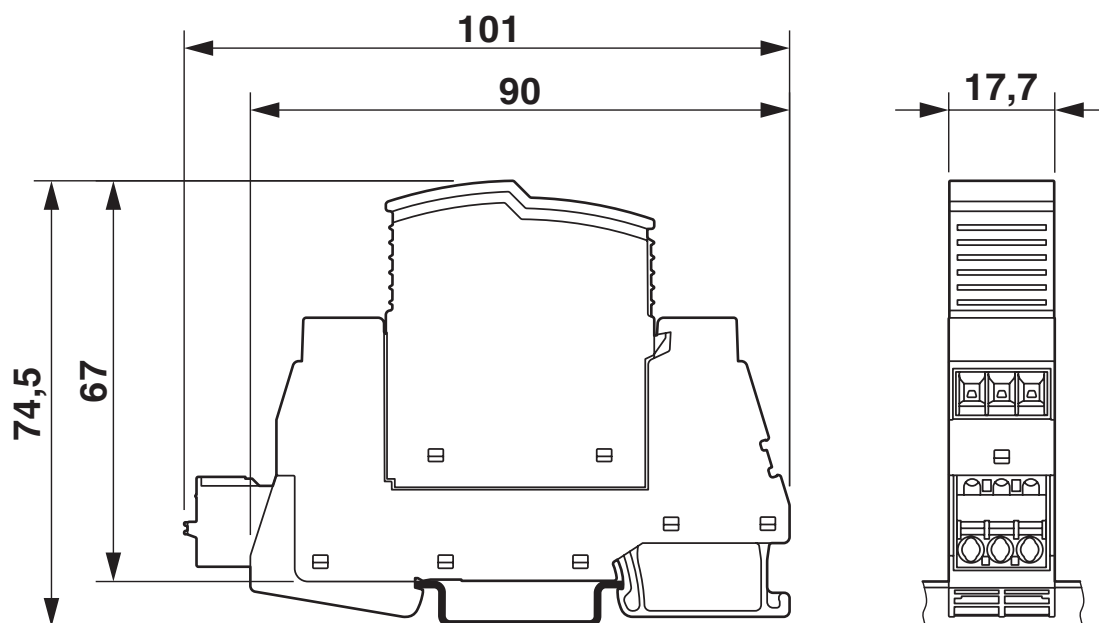


PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925

<https://www.phoenixcontact.com/au/products/2907925>

Product drawing

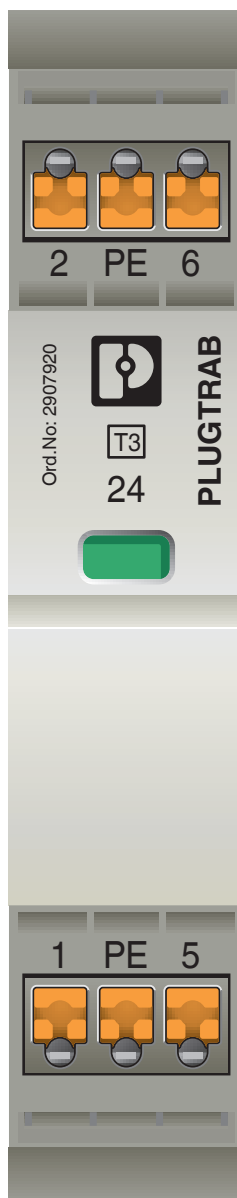


PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925


<https://www.phoenixcontact.com/au/products/2907925>

Diagram

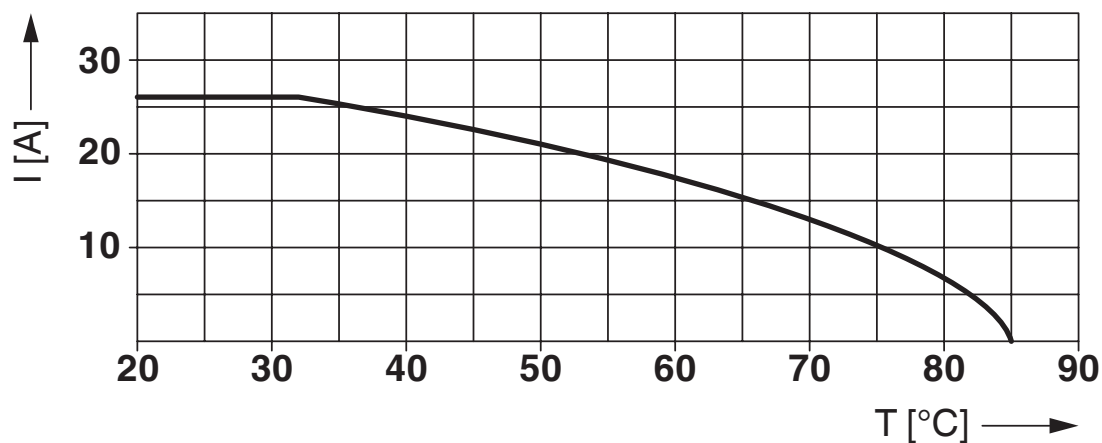

Nominal current depending on ambient temperature

Circuit diagram

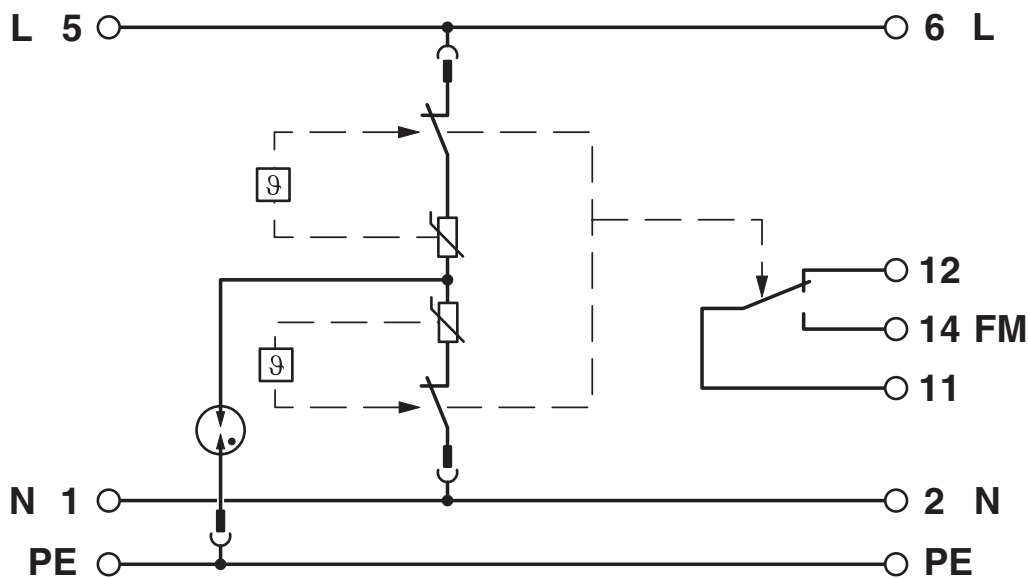

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925

<https://www.phoenixcontact.com/au/products/2907925>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2907925>



IECEE CB Scheme

Approval ID: NL-51083



EAC

Approval ID: RU C-DE.*09.B.00169

CCA

Approval ID: NTR-NL 7676



KEMA-KEUR

Approval ID: 71-103027

UAE-RoHS

Approval ID: 23-10-88891

PLT-SEC-T3-24-FM-PT - Type 3 surge protection device



2907925
<https://www.phoenixcontact.com/au/products/2907925>

Classifications

ECLASS

ECLASS-13.0	27171203
-------------	----------

ETIM

ETIM 9.0	EC000942
----------	----------

UNSPSC

UNSPSC 21.0	39121600
-------------	----------

2907925
<https://www.phoenixcontact.com/au/products/2907925>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au