

https://www.phoenixcontact.com/au/products/3001594



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

Commercial data

| Item number | 3001594 |
|--------------------------------------|--------------------|
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE2Z2X |
| Product key | BE2Z2X |
| Catalog page | Page 98 (C-1-2019) |
| GTIN | 4046356890861 |
| Weight per piece (including packing) | 1.81 g |
| Weight per piece (excluding packing) | 1.682 g |
| Customs tariff number | 85366990 |
| Country of origin | CN |



https://www.phoenixcontact.com/au/products/3001594



Technical data

Product properties

| Product type | Plug-in bridge |
|---------------------|----------------|
| Number of positions | 3 |
| Pitch | 6.2 mm |

Electrical properties

| Maximum load current | 24 A (The current values for the jumpers can deviate when used |
|----------------------|---|
| | in different modular terminal blocks. The precise values can be |
| | found in the accessories data for the respective modular terminal |
| | blocks.) |

Connection data

| Maximum load current | 24 A (The current values for the jumpers can deviate when used |
|----------------------|---|
| | in different modular terminal blocks. The precise values can be |
| | found in the accessories data for the respective modular terminal |
| | blocks.) |

Dimensions

Material specifications

| Color | red (RAL 3001) |
|--|----------------|
| Material | Copper |
| Flammability rating according to UL 94 | V0 |
| Insulating material | PA |

Mounting

| Mounting type | Plug-in mounting |
|---------------|------------------|


3001594

https://www.phoenixcontact.com/au/products/3001594



Drawings

Schematic diagram

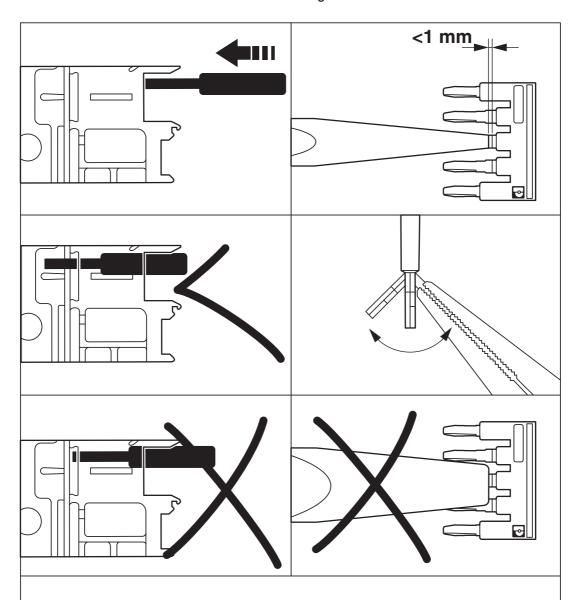

Please note a reduction of the nominal voltage if the FBS bridges are configured by breaking out contact tabs or cutting to a specific length



https://www.phoenixcontact.com/au/products/3001594



Classifications

UNSPSC 21.0

| _ | \sim | 1 100 |
|---|--------|-------|
| _ | | |
| | | |

| | ECLASS-13.0 | 27250303 |
|----|-------------|----------|
| ΕΊ | ТМ | |
| | ETIM 9.0 | EC000489 |
| U | ISPSC | |

39121400



https://www.phoenixcontact.com/au/products/3001594



Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--|
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT PTY Ltd Unit 7, 2-8 South Street Rydalmere NSW 2116 1300 786 411 customerservice@phoenixcontact.com.au