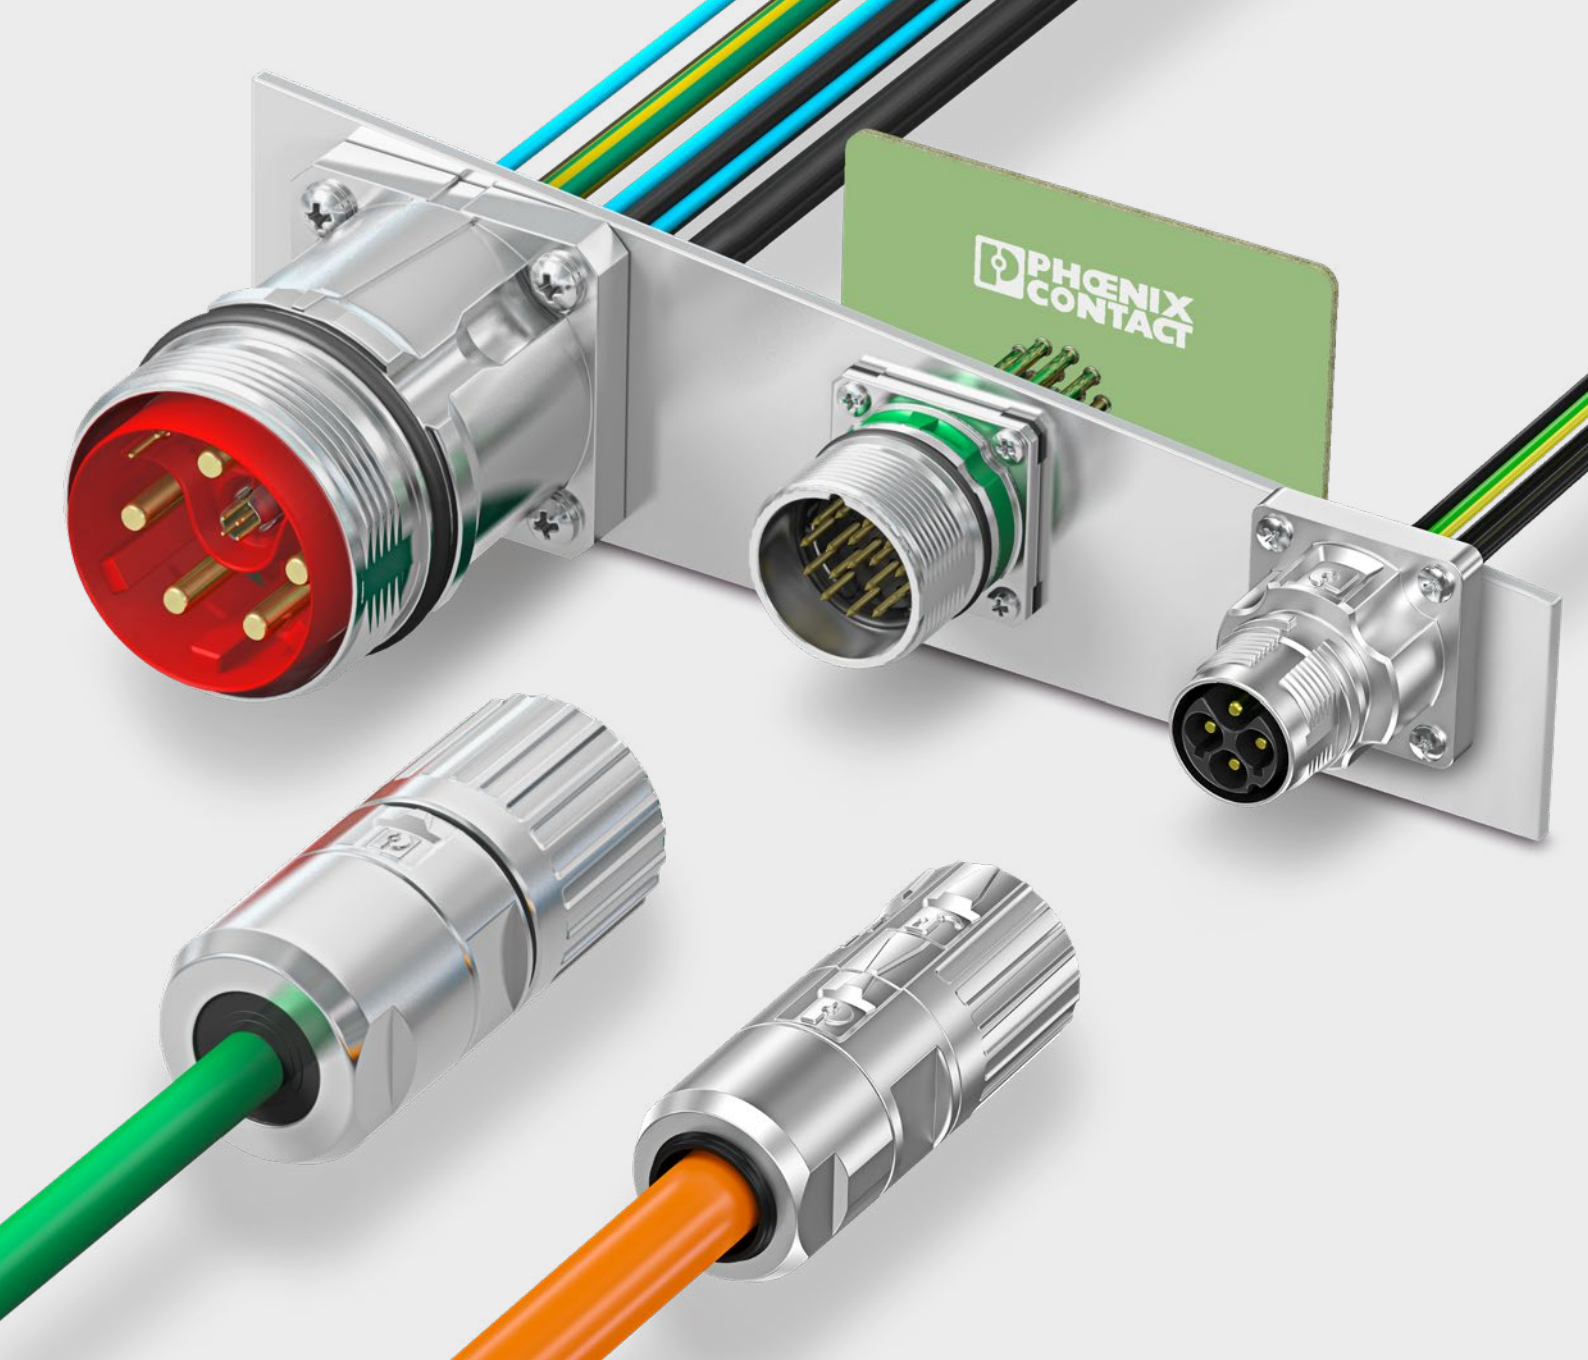




M17 to M58 circular connectors

Product overview 2025

M17 to M58 circular connectors

As a specialist in the field, Phoenix Contact offers circular connectors from M5 to M58 – the largest range of robust circular connectors on the market, from small to large, straight or angled, for signals or power, molded or designed for assembly on site. These products have been tried and tested over many years, in various fields – industrial automation, electrical drive technology, and in infrastructure applications.

SIGNAL

Signal connectors up to 19-position

- 6- to 19-position
- Sizes M17 and M23
- All housings can be fitted with male or female contacts
- EMC protection
- IP67 degree of protection
- Plastic-molded designs

 **Web code:** #0253



Find out more with the web code

For detailed information, use the web codes provided in this brochure. Simply enter # and the four-digit number in the search field on our website.

 **Web code:** #1234 (example)

Or use the direct link:
phoenixcontact.com/webcode/#1234



HYBRID

Hybrid connectors up to 70 A/850 V DC/630 V AC

- Transmission of signals, data, and power in a single connector
- Sizes M23 and M40
- Connectors with external thread suitable for standard and SPEEDCON locking
- Data interface, optionally with 4-pos. CAT5 shielded, 6-pos. shielded, 4-pos. signal unshielded, and without extension
- Connection cross-sections up to 16 mm²
- Plastic-molded designs

 **Web code: #0254**

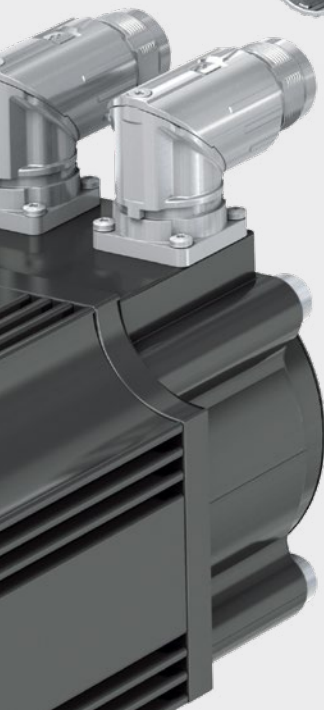


POWER

Power connectors up to 150 A/630 V

- Sizes M17, M23, M40, and M58
- 3+PE up to 5+3+PE
- Connection cross-sections up to 50 mm²
- IP67 degree of protection
- Plastic-molded designs

 **Web code: #0255**



Contents

Unrivalled variety for signals, data, and power	4
Cross-manufacturer compatible connectors – M17 to M40 PRO	6
Page navigation	8
M17 and M23 PRO signal connectors	10
M17 and M23 PRO power connectors	16
M17 and M23 signal connectors	20
M23 and M40 hybrid connectors	28
M17 to M58 power connectors	38
M17 and M23 signal connectors, plastic-molded	48
M23 hybrid connectors, plastic-molded	50
M17 and M23 power connectors, plastic-molded	51
Excellent services	54

Unrivalled variety for signals, data, and power

The circular connector product line ranges from signal connectors in sizes M17 and M23 to hybrid connectors and finally power connectors in sizes M17 to M58 for a maximum of 150 A and 630 V. The wide range of designs and pin assignments facilitates consistent solutions for transmitting signals and data as well as supplying power to electrical devices and drives. For smaller sizes and connectors for data transmission up to 10 Gbps, go to phoenixcontact.com



Sustainable and future-proof

Phoenix Contact is empowering sustainable products and already offers a comprehensive portfolio which is produced in accordance with future EU directives, with a reduced lead content below 0.1%. This corresponds to RoHS II without Exemption 6c.

You will find items that comply with the future EU directive and have a maximum lead content of 0.1% on our website via the standard item, using the filter “Lead content (EU-RoHS) – lead-free (Pb < 0.1%)”, or by entering the respective web code in the search field.

Web code: #2904

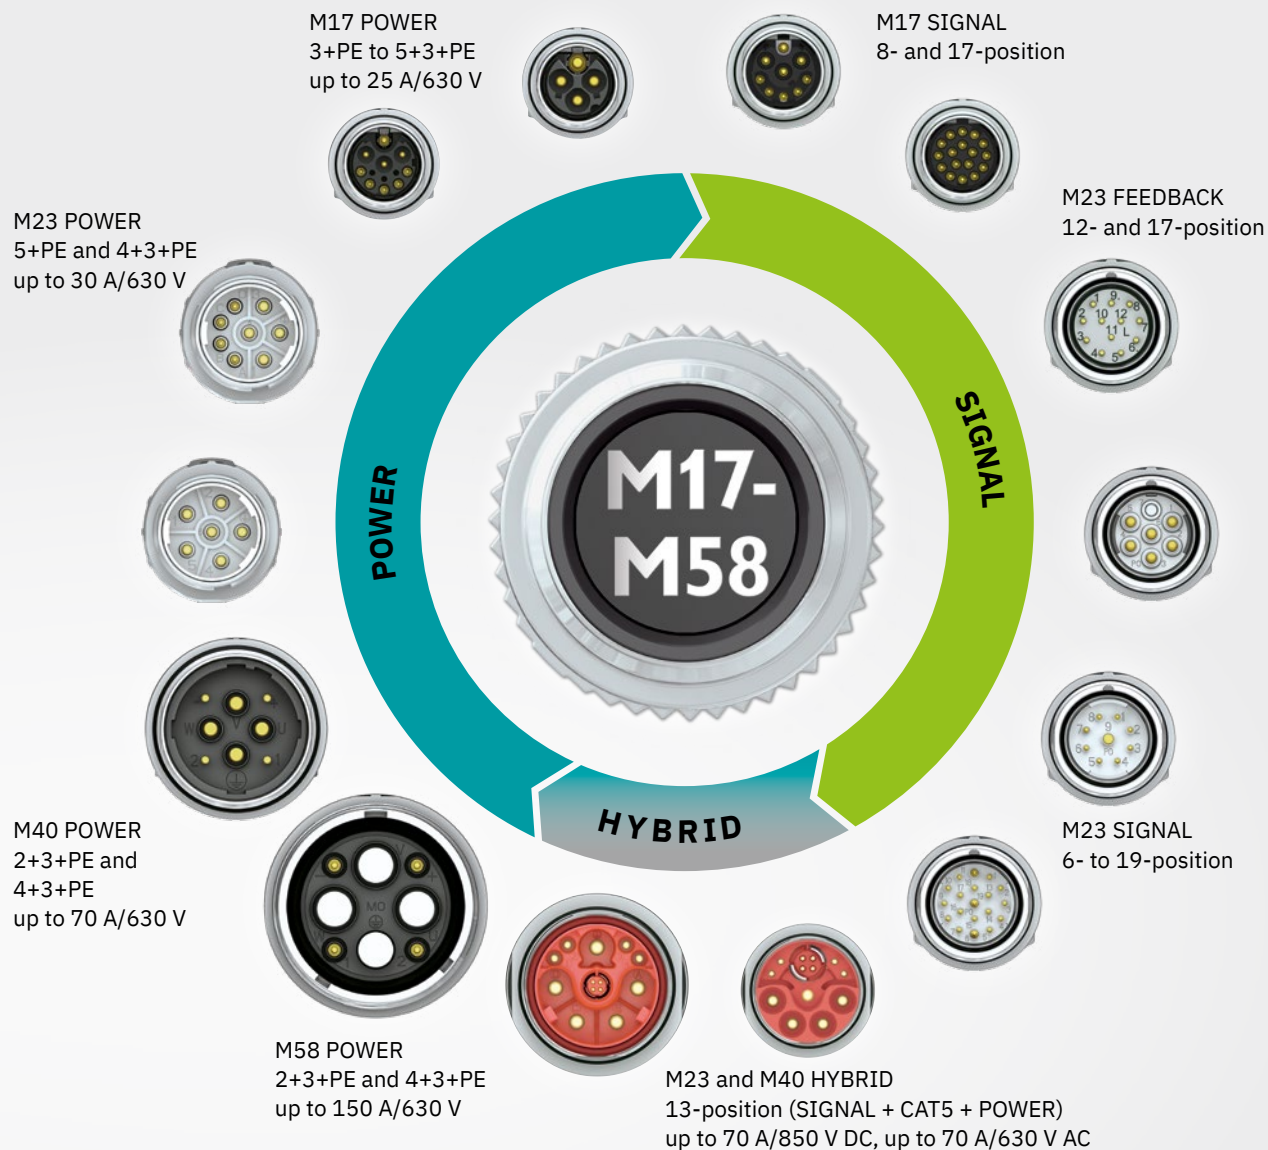
RoHS

Pb < 0,1%



Wide range of pin assignments

Consistent solutions for signal, data, and power transmission.



Compact device connection

Straight front or rear mounting and angled, rotatable with infinitely variable adjustment of the outlet direction.



Flexible cable connection

Cable and coupler connectors for secure cable assembly.

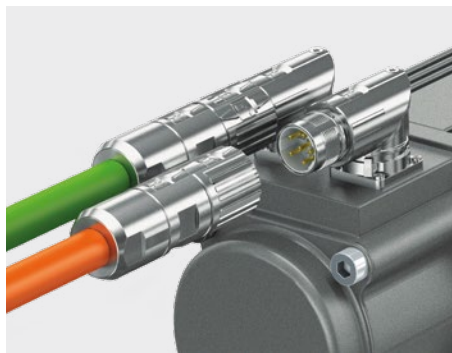


Easy cabling

Preassembled cables in straight and angled design with signal, power, and hybrid pin assignments.

Cross-manufacturer compatible connectors – M17 to M40 PRO

Cross-manufacturer compatible: signal and power connectors from the M17 to M40 PRO series offer consistent solutions for signal and power transmission. With the unique ONECLICK fast-locking system, you can connect your device quickly and securely.



Available worldwide

Cross-manufacturer compatible solutions for standard and fast-locking systems.

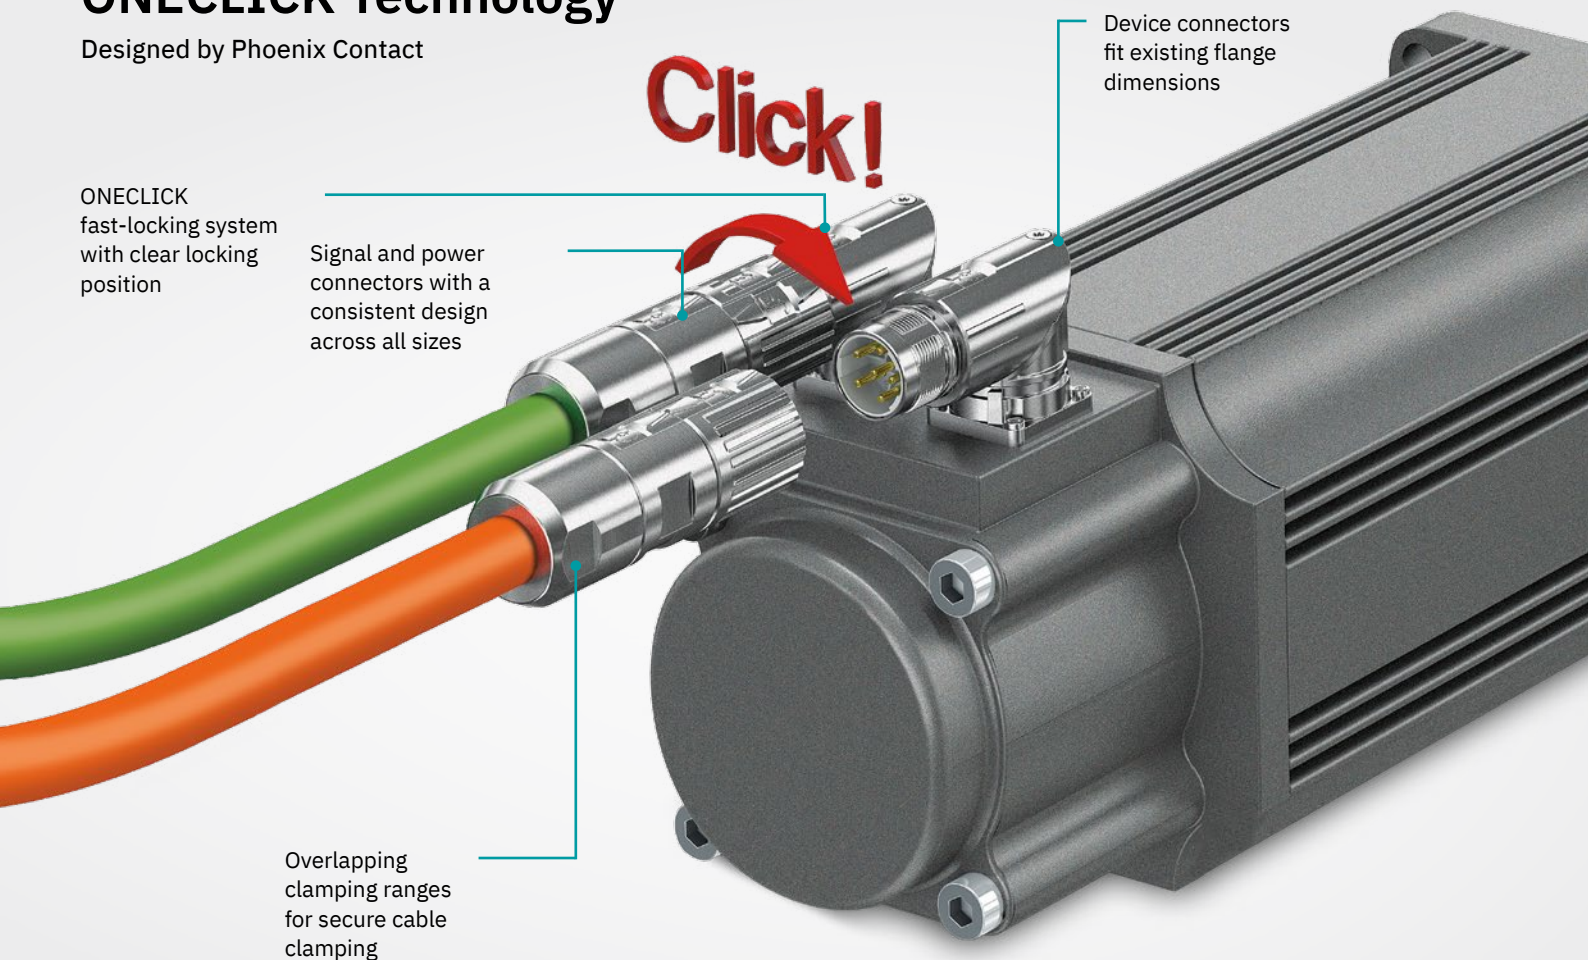


Secure locking

ONECLICK fast-locking system with an optically, haptically, and acoustically clear locking position.

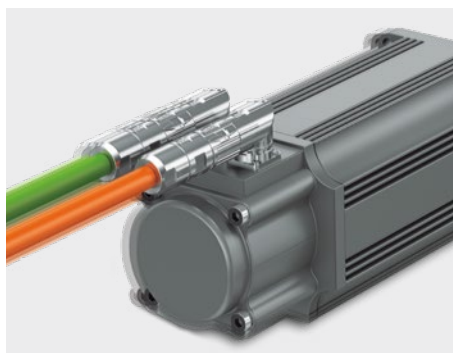
ONECLICK Technology

Designed by Phoenix Contact



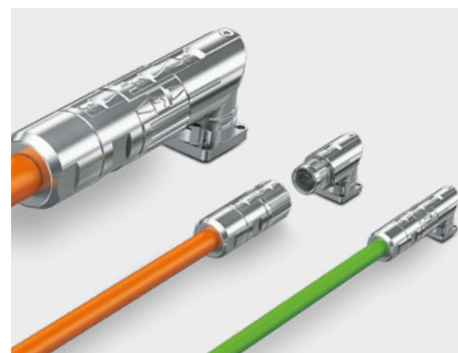
Designed for easy assembly

Easy and reliable shield connection for cost-effective cable assembly.



Vibration-resistant connection

Vibration brake in the cable connector for reliable connection under particularly harsh conditions.



Consistent design




Modern, consistent design for highly convenient operation.

Page navigation

M17 to M58 circular connectors										
Design	Size	Number of positions	6	7	8	8+1	12	12 reverse	16	17
Cable connectors, cross-manufacturer compatible, ONECLICK fast-locking system										
	M17 PRO	–	–	10	–	–	–	–	–	10
	M23 PRO	12	12	–	12	12	12	12	12	12
Cable connectors, cross-manufacturer compatible, standard locking										
	M17 PRO	–	–	10	–	–	–	–	–	10
	M23 PRO	12	12	–	12	12	12	12	12	12
Coupler connectors, cross-manufacturer compatible										
	M17 PRO	–	–	10	–	–	–	–	–	10
	M23 PRO	12	12	–	12	12	12	12	12	12
Device connectors, cross-manufacturer compatible										
	M17 PRO, straight	–	–	11	–	–	–	–	–	11
	M17 PRO, angled, rotatable	–	–	11	–	–	–	–	–	11
	M23 PRO, straight	14	14	–	14	14	–	14	14	14
	M23 PRO, angled, rotatable	14	14	–	14	14	14	14	14	14
Cable connectors, SPEEDCON fast-locking system										
	M23	–	–	–	–	–	–	–	–	–
	M40	–	–	–	–	–	–	–	–	–
Cable connectors, standard locking										
	M17	–	–	22	–	–	–	–	–	22
	M23	24	24	–	24	24	–	24	24	24
	M23 angled	24	24	–	24	24	–	24	24	24
	M40	–	–	–	–	–	–	–	–	–
	M58	–	–	–	–	–	–	–	–	–
Coupler connectors										
	M17	–	–	22	–	–	–	–	–	22
	M23	24	24	–	24	24	–	24	24	24
	M40	–	–	–	–	–	–	–	–	–
	M58	–	–	–	–	–	–	–	–	–
Panel feed-throughs										
	M23	–	–	–	–	–	–	–	–	–
Device connectors										
	M17, straight	–	–	23	–	–	–	–	–	23
	M17, angled, rotatable	–	–	23	–	–	–	–	–	23
	M23, straight	26	26	–	26	26	–	26	26	26
	M23, angled, rotatable	26	26	–	26	26	–	26	26	26
	M40, straight	–	–	–	–	–	–	–	–	–
	M40, angled, rotatable	–	–	–	–	–	–	–	–	–
	M58, straight	–	–	–	–	–	–	–	–	–
Plastic-molded cables										
	M17	–	–	–	–	–	–	–	–	48
	M23	–	–	–	–	48	48	–	–	–
	M23 angled	–	–	–	–	48	48	–	–	48



**SIGNAL****HYBRID****POWER**

16+3 16+2+PE	Hybrid 13	Hybrid 15 / 9	3+PE	5+PE	2+3+PE	6+PE	7+PE	4+3+PE	5+3+PE
–	–	–	16	16	–	16	16	–	16
12	–	–	–	18	–	–	–	18	–
–	–	–	16	16	–	16	16	–	16
12	–	–	–	18	–	–	–	18	–
–	–	–	16	16	–	16	16	–	16
12	–	–	–	18	–	–	–	18	–
–	–	–	16	16	–	16	16	–	16
12	–	–	–	18	–	–	–	18	–
–	–	–	16	16	–	16	16	–	16
–	–	–	16	16	–	16	16	–	16
14	–	–	–	19	–	–	–	19	–
14	–	–	–	19	–	–	–	19	–
–	30	31	–	–	–	–	–	–	–
–	34	35	–	–	–	–	–	–	–
–	–	–	40	40	–	40	40	–	40
24	38	38	–	42	–	–	–	42	–
24	–	–	–	–	–	–	–	–	–
–	–	–	–	–	44	–	–	44	–
–	–	–	–	–	46	–	–	46	–
–	–	–	40	40	–	40	40	–	40
24	38	38	–	42	–	–	–	42	–
–	–	–	–	–	44	–	–	44	–
–	–	–	–	–	46	–	–	46	–
–	–	–	–	43	–	–	–	43	–
–	–	–	40	40	–	40	40	–	40
–	–	–	40	44	–	44	44	–	44
26	32	33	–	43	–	–	–	43	–
26	32	33	–	43	–	–	–	43	–
–	36	37	–	–	44	–	–	44	–
–	36	37	–	–	44	–	–	44	–
–	–	–	–	–	47	–	–	47	–
–	–	–	51	51	–	–	51	–	–
–	50	–	52	52	–	–	–	52	–
–	50	–	–	53	–	–	–	53	–

M17 PRO series			8-position		17-position		
 Web code: #2068  Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method		Crimp		Crimp		
	Rated voltage	[V AC/DC]	60		60		
	Rated current ¹⁾	[A]	8		3.6		
	Number of contacts / diameter	[mm]	8 x 1.0		17 x 0.6		
	Litz wire cross-sections	[mm²]	0.06 ... 1.0		0.06 ... 0.5		
	Pin assignment		Male	Female	Male	Female	
							
Cable connectors, ONECLICK fast-locking system							
	Cable clamping range	[mm]	3.5 ... 6.5	1629016	1629013	1629010	1629007
			5.5 ... 9.5	1629015	1629012	1629009	1629006
			8.5 ... 12	1629014	1629011	1629008	1629005
Cable connectors, standard locking							
	Cable clamping range	[mm]	3.5 ... 6.5	1629058	1629055	1629052	1629049
			5.5 ... 9.5	1629057	1629054	1629051	1629048
			8.5 ... 12	1629056	1629053	1629050	1629047
Coupler connectors							
	Cable clamping range	[mm]	3.5 ... 6.5	1628974	1628971	1628968	1628965
			5.5 ... 9.5	1628973	1628970	1628967	1628964
			8.5 ... 12	1628972	1628969	1628966	1628963







¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M17 PRO series		8-position		17-position	
 Web code: #2068  Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	60		60	
	Rated current ¹⁾ [A]	8		3.6	
	Number of contacts / diameter [mm]	8 x 1.0		17 x 0.6	
	Litz wire cross-sections [mm²]	0.06 ... 1.0		0.06 ... 0.5	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1628932	1628931	1628928	1628927
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1628930	1628929	1628926	1628925
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1628527	1628526	1628523	1628522
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1628525	1628524	1628521	1628520

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M23 PRO series			6-position		7-position		9(8+1)-position		
Web code: #2068 RoHS Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method		Crimp, solder		Crimp, solder		Crimp, solder		
	Rated voltage [V AC/DC]		300		300		300		
	Rated current ¹⁾ [A]		20		20		8 / 20		
	Number of contacts / diameter [mm]		6 x 2.0		7 x 2.0		8 x 1.0 / 1 x 2.0		
	Litz wire cross-sections [mm²]		0.06 ... 2.5		0.06 ... 2.5		0.08 ... 1.0 / 0.06 ... 2.5		
	Pin assignment		Male	Female	Male	Female	Male	Female	
									
Cable connectors, ONECLICK fast-locking system									
	Cable clamping range [mm] Solder connection	3 ... 15	1341720	1341726	1341731	1341737	1342194	1342198	
		4 ... 8.5	1341715	1341722	1341727	1341733	1342191	1342195	
		ONECLICK Technology [®] Designed by Phoenix Contact	6 ... 10	1341718	1341723	1341728	1341734	1342192	1342196
			9 ... 15	1341719	1341724	1341729	1341735	1342193	1342197
	Cable clamping range [mm] Crimp connection	3 ... 15	1629188	1629184	1629176	1629180	1629168	1629172	
		4 ... 8.5	1629191	1629187	1629179	1629183	1629171	1629175	
		ONECLICK Technology [®] Designed by Phoenix Contact	6 ... 10	1629190	1629186	1629178	1629182	1629170	1629174
			9 ... 15	1629189	1629185	1629177	1629181	1629169	1629173
Cable connectors, standard locking									
	Cable clamping range [mm] Solder connection	3 ... 15	1340661	1340669	1340674	1340681	1340685	1340690	
		4 ... 8.5	1340657	1340663	1340670	1340675	1340682	1340686	
		6 ... 10	1340658	1340665	1340672	1340675	1340683	1340688	
		9 ... 15	1340659	1340667	1340673	1340679	1340684	1340689	
	Cable clamping range [mm] Crimp connection	3 ... 15	1629232	1629236	1629224	1629228	1629216	1629220	
		4 ... 8.5	1629235	1629239	1629227	1629231	1629219	1629223	
		6 ... 10	1629234	1629238	1629226	1629230	1629218	1629222	
		9 ... 15	1629233	1629237	1629225	1629229	1629217	1629221	
Coupler connectors									
	Cable clamping range [mm] Solder connection	3 ... 15	1467190	1467199	1467430	1467435	1467235	1467246	
		4 ... 8.5	1467180	1467191	1467426	1467432	1467232	1467239	
		6 ... 10	1467181	1467193	1467428	1467433	1467233	1467242	
		9 ... 15	1467187	1467197	1467429	1467434	1467234	1467244	
	Cable clamping range [mm] Crimp connection	3 ... 15	1629140	1629136	1629128	1629132	1629120	1629124	
		4 ... 8.5	1629143	1629139	1629131	1629135	1629123	1629127	
		6 ... 10	1629142	1629138	1629130	1629134	1629122	1629126	
		9 ... 15	1629141	1629137	1629129	1629133	1629121	1629125	

¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing.

Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page a

12-position		12-position reverse		16-position		17-position		19(16+2+PE)-position		19 (16+3)-position	
Crimp, solder		Crimp, solder		Crimp, solder		Crimp, solder		Crimp		Crimp, solder	
150		150		125		125		150		150	
8		8		8		8		8 / 10		8 / 10	
12 x 1.0		12 x 1.0		16 x 1.0		17 x 1.0		16 x 1.0 / 3 x 1.5		16 x 1.0 / 3 x 1.5	
0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1342202	1342207	1543937	1543942	1679700	1679696	1342724	1342728	–	–	1342732	1342739
1342199	1342203	1543933	1543938	1679697	1679692	1342720	1342725	–	–	1342729	1342733
1342200	1342205	1543934	1543940	1679698	1679693	1342722	1342726	–	–	1342730	1342734
1342201	1342206	1543936	1543941	1679699	1679695	1342723	1342727	–	–	1342731	1342735
1629160	1629164	1069326	1069322	1681371	1681375	1629152	1629156	1629144	1629148	1718400	1718406
1629163	1629167	1069323	1069319	1681367	1681372	1629155	1629159	1629147	1629151	1718396	1718402
1629162	1629166	1069324	1069320	1681368	1681373	1629154	1629158	1629146	1629150	1718398	1718404
1629161	1629165	1069325	1069321	1681370	1681374	1629153	1629157	1629145	1629149	1718399	1718405
1340694	1340703	1543928	1543932	1679686	1679686	1341224	1341228	–	–	1341232	1341236
1340691	1340695	1543925	1543929	1679681	1679681	1341221	1341225	–	–	1341229	1341233
1340692	1340696	1543926	1543930	1679682	1679682	1341222	1341226	–	–	1341230	1341234
1340693	1340700	1543927	1543931	1679684	1679684	1341223	1341227	–	–	1341231	1341235
1629208	1629212	1069317	1069313	1681358	1681366	1629200	1629204	1629192	1629196	1720043	1718395
1629211	1629215	1069314	1069309	1681354	1681360	1629203	1629207	1629195	1629199	1720041	1718392
1629210	1629214	1069315	1069311	1681354	1681364	1629202	1629206	1629194	1629198	1326011	1718393
1629209	1629213	1069316	1069312	1681357	1681365	1629201	1629205	1629193	1629197	1718849	1718394
1467144	1467148	1543945	1543950	1679705	1679709	1467459	1467463	–	–	1467481	1467486
1467140	1467145	1543943	1543946	1679702	1679706	1467456	1467460	–	–	1467476	1467482
1467142	1467146	1473127	1543947	1679703	1679707	1467457	1467461	–	–	1467479	1467483
1467143	1467147	1543944	1543949	1679704	1679708	1467458	1467462	–	–	1467480	1467484
1629112	1629116	1329285	1329277	1681466	1681474	1629104	1629108	1629096	1629100	1718412	1718418
1629115	1629119	1329282	1329272	1681463	1681467	1629107	1629111	1629099	1629103	1718408	1718413
1629114	1629118	1329283	1329274	1681464	1681469	1629106	1629110	1629098	1629102	1718409	1718415
1629113	1629117	1329284	1329276	1681465	1681472	1629105	1629109	1629097	1629101	1718411	1718416

M23 PRO series

Web code: #2068

RoHS

Pb < 0,1%

Items are lead-free
(RoHS II without
Exemption 6c)

Connection method

Crimp, solder

Crimp, solder

Crimp, solder

Rated voltage [V AC/DC]

300

300

300

Rated current ¹⁾ [A]

20

20

8 / 20

Number of contacts / diameter [mm]

6 x 2.0

7 x 2.0

8 x 1.0 / 1 x 2.0

Litz wire cross-sections [mm²]

0.06 ... 2.5

0.06 ... 2.5

0.08 ... 1.0 / 0.06 ... 2.5

Pin assignment

Male







Female

Male

Female

Male

Female



Device connectors, straight, front mounting



**Solder connection, flange dimensions:
26 mm x 26 mm**
Mounting holes: 4 x Ø 2.7 mm

1339315

1339317

1339319

1339322

1339324

1339326

**Solder connection, flange dimensions:
26 mm x 26 mm**
Mounting holes: 4 x Ø 3.2 mm

1339314

1339316

1339318

1339321

1339323

1339325

**Solder connection, flange dimensions:
28 mm x 28 mm**
Mounting holes: 4 x Ø 3.2 mm

—

—

—

—

—

—

**Crimp connection, flange dimensions:
26 mm x 26 mm**
Mounting holes: 4 x Ø 2.7 mm

1132736

1132558

1132738

1132737

1132741

1132740

**Crimp connection, flange dimensions:
26 mm x 26 mm**
Mounting holes: 4 x Ø 3.2 mm

1629095

1629094

1629092

1629093

1629090

1629091

**Crimp connection, flange dimensions:
28 mm x 28 mm**
Mounting holes: 4 x Ø 3.2 mm

—

—

—

—

—

—

Device connectors, angled, rotatable, front mounting



**Crimp connection, flange dimensions:
26 mm x 26 mm**
Mounting holes: 4 x Ø 3.2 mm

1341925

1341926

1341927

1341929

1341930

1341932

**Crimp connection, flange dimensions:
28 mm x 28 mm**
Mounting holes: 4 x Ø 3.2 mm

1341934

1341933

1341935













1341948

1341950

1341949

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page.

12-position		12-position reverse		16-position		17-position		19(16+2+PE)-position		19 (16+3)-position	
Crimp, solder		Crimp		Crimp, solder		Crimp, solder		Crimp		Crimp, solder	
150		150		125		125		150		150	
8		8		8		8		8 / 10		8 / 10	
12 x 1.0		12 x 1.0		16 x 1.0		17 x 1.0		16 x 1.0 / 3 x 1.5		16 x 1.0 / 3 x 1.5	
0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
											
1339330	1339333	1543921	1543924	1679717	1679720	1339336	1339339	—	—	—	—
1339327	1320259	1543918	1543917	1679710	1679718	1339334	1339337	—	—	1339340	1339341
1339329	1339332	1543920	1543923	1679716	1679719	1339335	1339338	—	—	—	—
1132744	1132742	1329289	1329280	1681137	1681138	1132747	1132745	—	—	1718623	1718624
1629088	1629089	1329286	1329278	1681133	1681135	1629086	1629087	1629084	1629085	1718620	1718622
1629082	1629083	1329288	1329279	1681134	1681136	1629080	1629081	—	—	—	—
1628498	1628499	1069328	1069327	1681475	1681478	1628496	1628497	—	—	1718625	1718626
1628494	1628495	1069330	1069329	1681477	1681479	1628492	1628493	—	—	—	—

at phoenixcontact.com.

POWER

M17 PRO series			4 (3+PE)-position	
Web code: #2067 RoHS Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method		Crimp	
	Rated voltage [V AC/DC]		630	
	Rated current ¹⁾ [A]		20	
	Number of contacts / diameter [mm]		4x 1.5	
	Litz wire cross-sections [mm²]		0.25 ... 2.5	
	Pin assignment		Male	Female
				
Cable connectors, ONECLICK fast-locking system				
	Cable clamping range [mm]	3.5 ... 6.5	1069487	1069490
		5.5 ... 9.5	1069488	1069491
		8.5 ... 12	1069489	1069492
ONECLICK Technology ¹⁾ Designed by Phoenix Contact				
Cable connectors, standard locking				
	Cable clamping range [mm]	3.5 ... 6.5	1069481	1069484
		5.5 ... 9.5	1069482	1069485
		8.5 ... 12	1069483	1069486
Coupler connectors				
	Cable clamping range [mm]	3.5 ... 6.5	1069495	1069498
		5.5 ... 9.5	1069496	1069499
		8.5 ... 12	1069497	1069509
Device connectors, front mounting				
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm		1069502	1069500
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm		1069503	1069504
Device connectors, angled, rotatable, front mounting				
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm		1069505	1069506
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm		1069507	1069508





¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing.

Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page a

6 (5+PE)-position		7 (6+PE)-position		8 (7+PE)-position		9 (5+3+PE)-position	
Crimp		Crimp		Crimp		Crimp	
630		630		630		60 / 630	
14		14		14		3.6 / 14	
6 x 1.0		7 x 1.0		8 x 1.0		5 x 0.6 / 4 x 1.0	
0.06 ... 1.0		0.06 ... 1.0		0.06 ... 1.0		0.06 ... 0.5 / 0.06 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female
							
1628998	1628995	1628992	1628989	1628986	1628983	1628980	1628977
1628997	1628994	1628991	1628988	1628985	1628982	1628979	1628976
1628996	1628993	1628990	1628987	1628984	1628981	1628978	1628975
1629040	1629037	1629034	1629031	1629028	1629025	1629022	1629019
1629039	1629036	1629033	1629030	1629027	1629024	1629021	1629018
1629038	1629035	1629032	1629029	1629026	1629023	1629020	1629017
1628956	1628953	1628950	1628947	1628944	1628941	1628938	1628935
1628955	1628952	1628949	1628946	1628943	1628940	1628937	1628934
1628954	1628951	1628948	1628945	1628942	1628939	1628936	1628933
1628920	1628919	1628916	1628915	1628912	1628911	1628908	1628907
1628918	1628917	1628914	1628913	1628910	1628909	1628906	1628905
1628515	1628514	1628511	1628510	1628507	1628506	1628503	1628502
1628513	1628512	1628509	1628508	1628505	1628504	1628501	1628500




at phoenixcontact.com.

M23 PRO series			6 (5+PE)-position		8 (4+3+PE)-position	
Web code: #2067 RoHS Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method		Crimp		Crimp	
	Rated voltage [V AC/DC]		630		250 / 630	
	Rated current ¹⁾ [A]		30		9 / 30	
	Number of contacts / diameter [mm]		6 x 2		4 x 1 / 4 x 2	
	Litz wire cross-sections [mm²]		0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors, ONECLICK fast-locking system						
	Cable clamping range [mm]	5.5 ... 15	1628871	1628815	1628867	1628811
	Short version Cable Ø 5.5 mm ... 14.5 mm ONECLICK Technology ¹⁾ Designed by Phoenix Contact	5.5 ... 8	1628874	1628818	1628869	1628813
		7.5 ... 12	1628873	1628817	1628870	1628814
		9.5 ... 14.5	1628872	1628816	1628868	1628812
	Cable clamping range [mm]	7.5 ... 17	1628852	1628796	1628847	1628791
	Long version Cable Ø 5.5 mm ... 17 mm ONECLICK Technology ¹⁾ Designed by Phoenix Contact	5.5 ... 8	1628856	1628800	1628850	1628795
		7.5 ... 12	1628855	1628799	1628851	1628794
		9.5 ... 14.5	1628854	1628798	1628849	1628793
		14 ... 17	1628853	1628797	1628848	1628792
Cable connectors, standard locking						
	Cable clamping range [mm]	5.5 ... 15	1628879	1628823	1628875	1628819
	Short version Cable Ø 5.5 mm ... 14.5 mm	5.5 ... 8	1628882	1628826	1628878	1628822
		7.5 ... 12	1628881	1628825	1628877	1628821
		9.5 ... 14.5	1628880	1628824	1628876	1628820
	Cable clamping range [mm]	7.5 ... 17	1628862	1628806	1628857	1628801
	Long version Cable Ø 5.5 mm ... 17 mm	5.5 ... 8	1628866	1628810	1628861	1628805
		7.5 ... 12	1628865	1628809	1628860	1628804
		9.5 ... 14.5	1628864	1628808	1628859	1628803
		14 ... 17	1628863	1628807	1628858	1628802
Coupler connectors						
	Cable clamping range [mm]	5.5 ... 15	1628786	1628842	1628780	1628836
	Cable Ø 5.5 mm ... 17 mm	7.5 ... 17	1628785	1628841	1628779	1628835
		5.5 ... 8	1628790	1628846	1628784	1628840
		7.5 ... 12	1628789	1628845	1628783	1628839
		9.5 ... 14.5	1628788	1628844	1628782	1628838
		14 ... 17	1628787	1628843	1628781	1628837

¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

POWER

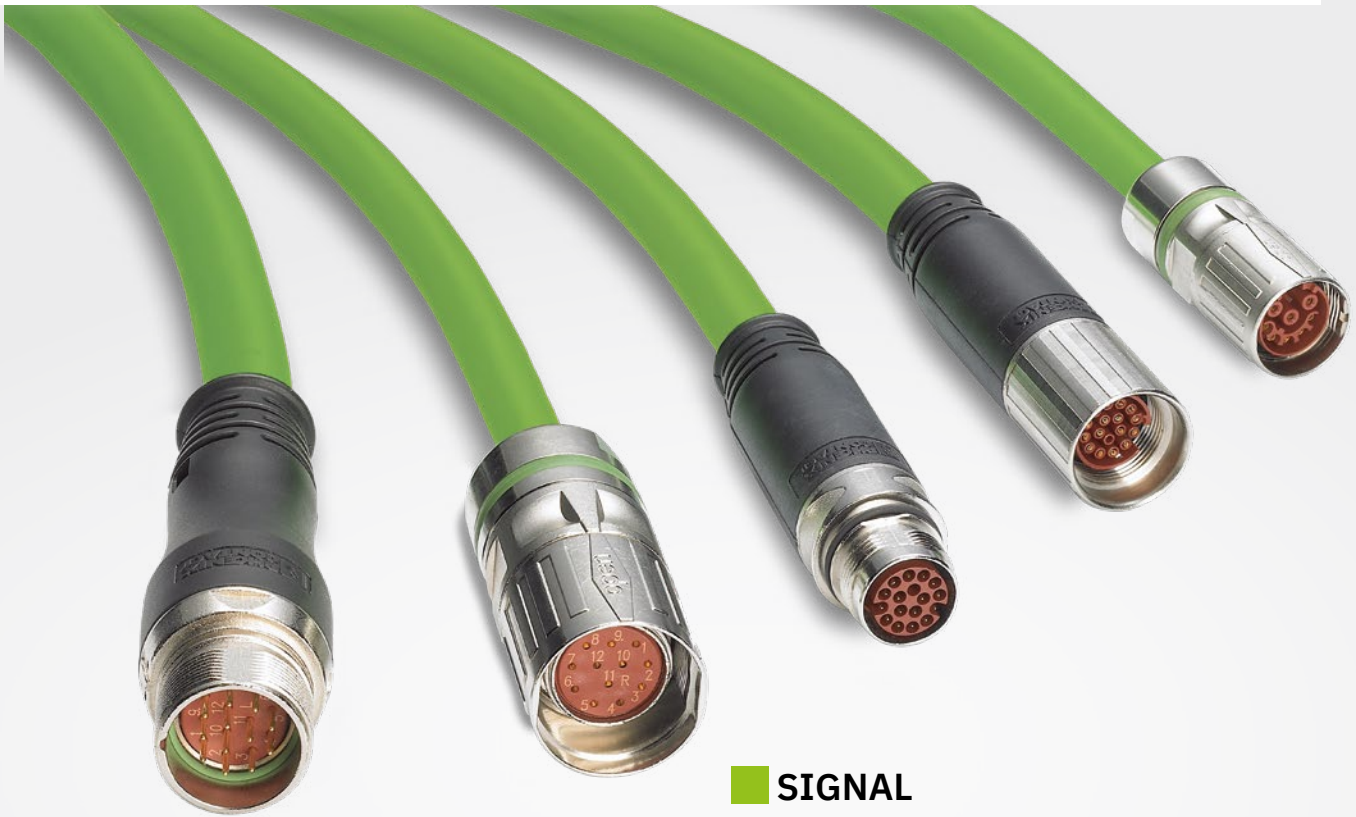
M23 PRO series		6 (5+PE)-position		8 (4+3+PE)-position	
 Web code: #2067  RoHS Pb < 0,1% Items are lead-free (RoHS II without Exemption 6c)	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	630		250 / 630	
	Rated current ¹⁾ [A]	30		9 / 30	
	Number of contacts/diameter [mm]	6 x 2		4 x 1 / 4 x 2	
	Litz wire cross-sections [mm²]	0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, straight, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1628778	1628834	1628777	1628833
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1628776	1628832	1628775	1628831
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1628487	1628491	1628486	1628490
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1628485	1628489	1628484	1628488

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching turned and punched-rolled crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M17 and M23 signal connectors

The M17 and M23 circular connectors cover numerous industrial signal applications. They also satisfy requirements relating to tightness of seal, vibration resistance, and EMC protection. The 6- to 19-position circular connectors are supplemented by a complete range with plastic-molded designs.



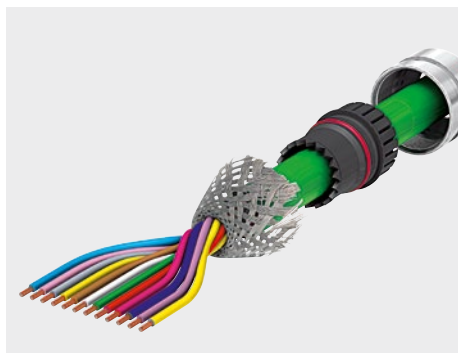
SIGNAL

Signal connectors up to 19-position

- 6- to 19-position
- Sizes M17 and M23
- All housings can be fitted with male or female contacts
- Connectors with external thread suitable for standard and SPEEDCON locking
- EMC protection
- IP67 degree of protection
- Plastic-molded designs



Your advantages at a glance



Reliable transmission

All connectors with 360° shield connection.



Various connection methods

Crimp connection, solder connection, and device connectors with additional solder-in connection.



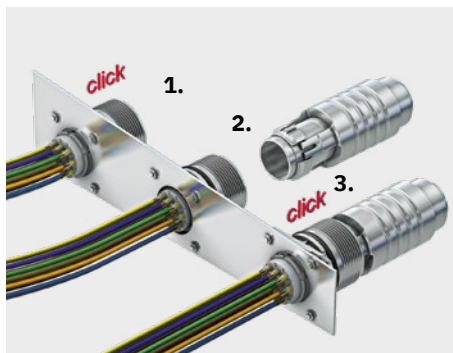
Visual color coding

Mismatching is prevented with customer-specific marking of the connectors with color rings.



High contact density

6- to 19-pos. for a variety of signal and feedback applications.







Easy mounting and removal

1. Insert M23 contact carrier from the connection side and snap into place
2. Attach removal tool on the plug side
3. Release contact carrier





Flexible assembly

All housings can be fitted with male or female contacts.

M17			8-position		17-position		
 Web code: #0256  Lead-free alternative items available	Connection method		Crimp		Crimp		
	Rated voltage [V AC/DC]		48 / 74		48 / 74		
	Rated current ¹⁾ [A]		8		3.6		
	Number of contacts / diameter [mm]		8 x 1.0		17 x 0.6		
	Litz wire cross-sections [mm²]		0.06 ... 1.0		0.06 ... 0.5		
	Pin assignment		Male	Female	Male	Female	
							
Cable connectors							
		Cable clamping range [mm]	5 ... 8	1618995	1619003	1607624	1607641
			8 ... 10	1618996	1619004	1607626	1607643
			10 ... 12.5	1618997	1619005	1624528	1624531
Coupler connectors							
		Cable clamping range [mm]	5 ... 8	1619011	1619015	1607630	1607647
			8 ... 10	1619012	1619016	1607631	1607649
			10 ... 12.5	1619013	1619017	1624530	1624533





¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M17		8-position		17-position	
Web code: #0258 RoHS Lead-free alternative items available	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	48 / 74		48 / 74	
	Rated current ¹⁾ [A]	8		3.6	
	Number of contacts / diameter [mm]	8 x 1.0		17 x 0.6	
	Litz wire cross-sections [mm²]	0.06 ... 1.0		0.06 ... 0.5	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 21.6 mm x 21.6 mm Snap-in contact insert Mounting holes: 4 x Ø 2.7 mm	1619037	1619038	1607634	1607653
	Flange dimensions: 21.6 mm x 21.6 mm Contact insert for support on the device Mounting holes: 4 x Ø 2.7 mm	1613286	1619039	1607636	1607654
Device connectors, front mounting					
	Flange dimensions: 25.75 mm x 25.75 mm Snap-in contact insert Mounting holes: 4 x Ø 3.2 mm	1619219	1619220	1619225	1619226
	Flange dimensions: 25.75 mm x 25.75 mm Contact insert for support on the device Mounting holes: 4 x Ø 3.2 mm	1619196	1619197	1619202	1619206
Device connectors, angled, rotatable, front mounting					
	See the M17 PRO series, more information starting on page 10.				
Device connectors, front mounting, central fastening					
	Fastening thread: M18 x 0.75 mm	1618584	1619036	1613540	1613542
	Accessories: M18 x 0.75 mm locking nut	1613831			
Device connectors, rear mounting, central fastening					
	Fastening thread: M20 x 1.5	1619034	1619035	1613541	1613543
	Accessories: M20 x 1.5 locking nut	1600417			

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.








M23 ADVANCE				6-position		7-position		
Web code: #0259 RoHS Lead-free alternative items available	Connection method		Crimp, solder		Crimp, solder			
	Rated voltage [V AC/DC]		48 / 74		48 / 74			
	Rated current ¹⁾ [A]		20		20			
	Number of contacts / diameter [mm]		6 x 2.0		7 x 2.0			
	Litz wire cross-sections [mm²]		0.06 ... 2.5		0.06 ... 2.5			
	Pin assignment		Male	Female	Male	Female		
								
Cable connectors								
	Cable clamping range [mm]	3 ... 14.5	1619775	1619776	1619771	1619772		
		Solder connection		4 ... 6	1619749	1619750	1619745	1619746
				6 ... 10	1619723	1619724	1619719	1619720
				10 ... 14.5	1619658	1619659	1619654	1619655
	Cable clamping range [mm]	3 ... 14.5	1619773	1619774	1619769	1619770		
		Crimp connection		4 ... 6	1619747	1619748	1619743	1619744
				6 ... 10	1619721	1619722	1619717	1619718
				10 ... 14.5	1619656	1619657	1619652	1619653
Cable connectors, angled								
	Cable clamping range [mm]	3 ... 14.5	1619342	1619343	1619338	1619339		
		Solder connection		4 ... 6	1620290	1620291	1620286	1620287
				6 ... 10	1620261	1620262	1620257	1620258
				10 ... 14.5	1620211	1620212	1620207	1620208
	Cable clamping range [mm]	3 ... 14.5	1619340	1619341	1619336	1619337		
		Crimp connection		4 ... 6	1620288	1620289	1620284	1620285
				6 ... 10	1620259	1620260	1620255	1620256
				10 ... 14.5	1620209	1620210	1620191	1620192
Coupler connectors								
	Cable clamping range [mm]	3 ... 14.5	1620171	1620172	1620167	1620168		
		Solder connection		4 ... 6	1620144	1620145	1620140	1620141
				6 ... 10	1620118	1620119	1620114	1620115
				10 ... 14.5	1620045	1620046	1620041	1620042
	Cable clamping range [mm]	3 ... 14.5	1620169	1620170	1620165	1620166		
		Crimp connection		4 ... 6	1620142	1620143	1620138	1620139
				6 ... 10	1620116	1620117	1620080	1620081
				10 ... 14.5	1620043	1620044	1620037	1620038





¹⁾ Rated current for maximum connection cross-section.

²⁾ 16+2+FE for 19-position crimp connection, 16+3 (without FE) available on request.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing.

For crimp connection: Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.











9(8+1)-position		12-position		16-position		17-position		19(16+3)-position ²⁾	
Crimp, solder		Crimp, solder		Crimp, solder		Crimp, solder		Crimp, solder	
48 / 74		48 / 74		48 / 74		48 / 74		48 / 74	
8 / 20		8		8		8		8 / 10	
8 x 1.0 / 1 x 2.0		12 x 1.0		16 x 1.0		17 x 1.0		16 x 1.0 / 3 x 1.5	
0.08 ... 1.0 / 0.06 ... 2.5		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
									
1619767	1619768	1619763	1619764	1619759	1619760	1619755	1619756	1619751	1619752
1619741	1619742	1619737	1619738	1619733	1619734	1619729	1619730	1619725	1619726
1619715	1619716	1619709	1619710	1619705	1619706	1619701	1619702	1619660	1619661
1619650	1619651	1619646	1619647	1619642	1619643	1619638	1619639	1619634	1619635
1619765	1619766	1619761	1619762	1619757	1619758	1619753	1619754	1623845	1623846
1619739	1619740	1619735	1619736	1619731	1619732	1619727	1619728	1623843	1623844
1619711	1619714	1619707	1619708	1619703	1619704	1619699	1619700	1623841	1623842
1619648	1619649	1619644	1619645	1619640	1619641	1619636	1619637	1623839	1623840
1619334	1619335	1619330	1619331	1620300	1620301	1620296	1620297	1620292	1620293
1620282	1620283	1620278	1620279	1620274	1620275	1620267	1620268	1620263	1620264
1620253	1620254	1620249	1620250	1620245	1620246	1620217	1620218	1620213	1620214
1620189	1620190	1620185	1620186	1620181	1620182	1620177	1620178	1620173	1620174
1619332	1619333	1620302	1620303	1620298	1620299	1620294	1620295	1624075	1624071
1620280	1620281	1620276	1620277	1620271	1620273	1620265	1620266	1624076	1624072
1620251	1620252	1620247	1620248	1620219	1620244	1620215	1620216	1624077	1624073
1620187	1620188	1620183	1620184	1620179	1620180	1620175	1620176	1624078	1624074
1620163	1620164	1620159	1620160	1620155	1620156	1620150	1620151	1620146	1620147
1620136	1620137	1620132	1620133	1620128	1620129	1620124	1620125	1620120	1620121
1620078	1620079	1620074	1620075	1620070	1620071	1620051	1620052	1620047	1620048
1620035	1620036	1620031	1620032	1620027	1620028	1620023	1620024	1620019	1620020
1620161	1620162	1620157	1620158	1620152	1620154	1620148	1620149	1624010	1624006
1620134	1620135	1620130	1620131	1620126	1620127	1620122	1620123	1624013	1624009
1620076	1620077	1620072	1620073	1620053	1620069	1620049	1620050	1624012	1624008
1620033	1620034	1620029	1620030	1620025	1620026	1620021	1620022	1624011	1624007

M23 ADVANCE				6-position		7-position	
Web code: #0260 RoHS de: #0260 Lead-free alternative items available	Connection method		Crimp, solder, solder-in		Crimp, solder, solder-in		
	Rated voltage [V AC/DC]		48 / 74		48 / 74		
	Rated current ¹⁾ [A]		20		20		
	Number of contacts / diameter [mm]		6 x 2.0		7 x 2.0		
	Litz wire cross-sections [mm²]		0.06 ... 2.5		0.06 ... 2.5		
	Pin assignment		Male	Female	Male	Female	
							
Device connectors, front mounting, central fastening Pg13.5							
	Solder connection, axial seal		1619902	1619903	1619898	1619899	
	Crimp connection, axial seal		1619900	1619901	1619896	1619897	
Device connectors, front mounting, central fastening M20 x 1.5							
	Solder connection, axial seal		1619876	1619877	1619872	1619873	
	Accessories: M20 x 1.5 locking nut						
	Crimp connection, axial seal		1619874	1619875	1619870	1619871	
	Accessories: M20 x 1.5 locking nut						
Device connectors, front mounting, can be positioned, central fastening M20 x 1.5							
	Solder connection, axial seal		1624044	1624045	1624046	1624047	
	Crimp connection, axial seal		1624022	1624030	1624023	1624031	
Device connectors, front mounting, flange dimensions: 25 mm x 25 mm							
	Solder connection Mounting holes: 4 x Ø 3.2 mm, flat gasket		1619992	1619993	1619988	1619989	
	Crimp connection Mounting holes: 4 x Ø 3.2 mm, flat gasket		1619990	1619991	1619986	1619987	
	Free solder pin length [mm]:	3.5	1619954	1619955	1619952	1619953	
		10.0	1619930	1619931	1619928	1619929	
		17.5	1619915	1619916	1619913	1619914	
	Solder-in connection Mounting holes: 4 x Ø 3.2 mm, flat gasket						
Device connectors, angled, rotatable, front mounting, flange dimensions: 26 mm x 26 mm							
	See the M23 PRO series, more information starting on page 14						
Device connectors, rear mounting, central fixing nut M25 x 1.5							
	Solder connection Axial seal		1619850	1619851	1619846	1619847	
	Crimp connection Axial seal		1619848	1619849	1619844	1619845	

¹⁾ Rated current for maximum connection cross-section.

²⁾ 16+2+FE for 19-position crimp connection, 16+3 (without FE) available on request.

For crimp connection: Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

9(8+1)-position		12-position		16-position		17-position		19(16+3)-position ²⁾	
Crimp, solder, solder-in		Crimp, solder, solder-in		Crimp, solder, solder-in		Crimp, solder, solder-in		Crimp, solder	
48 / 74		48 / 74		48 / 74		48 / 74		48 / 74	
8 / 20		8		8		8		8 / 10	
8 x 1.0 / 1 x 2.0		12 x 1.0		16 x 1.0		17 x 1.0		16 x 1.0 / 3 x 1.5	
0.08 ... 1.0 / 0.06 ... 2.5		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0		0.08 ... 1.0 / 0.08 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
									
1619894	1619895	1619890	1619891	1619886	1619887	1619882	1619883	1619878	1619879
1619892	1619893	1619888	1619889	1619884	1619885	1619880	1619881	1624018	1624019
1619868	1619869	1619864	1619865	1619860	1619861	1619856	1619857	1619852	1619853
1600417									
1619866	1619867	1619862	1619863	1619858	1619859	1619854	1619855	1624016	1624017
1600417									
1624048	1624049	1624050	1624051	1624053	1624054	1624055	1624056	1624057	1624058
1624024	1624032	1624026	1624033	1624027	1624034	1624029	1624035	1623630	1623629
1619972	1619973	1619968	1619969	1619964	1619965	1619960	1619961	1619956	1619957
1619970	1619971	1619966	1619967	1619962	1619963	1619958	1619959	1624014	1624015
1619950	1619951	1619948	1619949	1619934	1619935	1619932	1619933	—	—
1619926	1619927	1619924	1619925	1619919	1619923	1619917	1619918	—	—
1619911	1619912	1619909	1619910	1619907	1619908	1619904	1619905	—	—
1619842	1619843	1619789	1619790	1619785	1619786	1619781	1619782	1619777	1619778
1619791	1619841	1619787	1619788	1619783	1619784	1619779	1619780	1624020	1624021

M23 and M40 hybrid connectors

The M23 and M40 hybrid connectors from Phoenix Contact allow you to reliably transmit signals, data, and power in a single connector.

The hybrid connectors are highly flexible: The data interface can be replaced by four unshielded signal contacts or six shielded data contacts. The hybrid connectors can also be ordered without a data element.



■ HYBRID

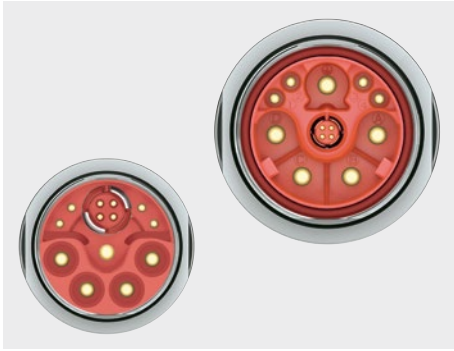
Hybrid connectors up to 70 A/850 V DC/630 V AC

- Transmission of signals, data, and power in a single connector
- Sizes M23 and M40
- Connectors with external thread suitable for standard and SPEEDCON locking
- Data interface, optionally with 4-pos. CAT5 shielded, 6-pos. shielded, 4-pos. signal unshielded, and without extension
- Connection cross-sections up to 16 mm²
- Plastic-molded designs



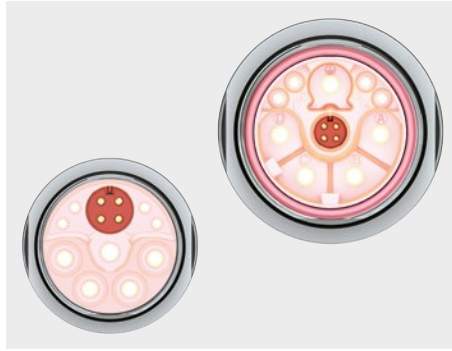
 Web code:
#0254

Your advantages at a glance



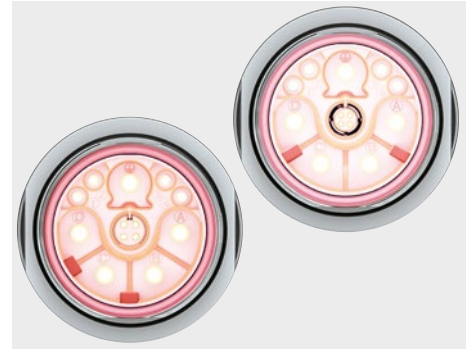
Reliable data transmission

Pin assignments 4+4+4+PE or 6+4+4+PE: reliable transmission of data (CAT5, RS485/EndAt 2,2), signals, and power.



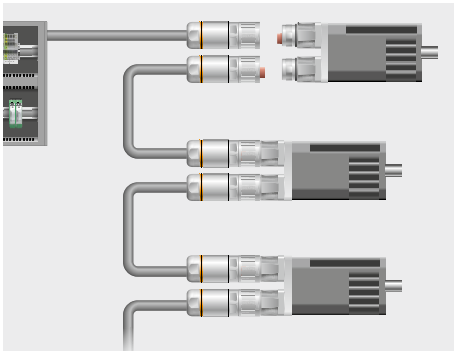
Additional flexibility

Pin assignments 8+4+PE or 4+4+PE: by replacing or eliminating the data interface.



Reliable connection

M40 with mechanical coding for all pin assignments reliably prevents mismatching.



Reduced cabling effort

Daisy chain application with hybrid connectors for distributed drive concepts.



Fast locking

Faster connection time with optional SPEEDCON fast-locking system, secure, and vibration-resistant.



Variable assembly

All housings can be fitted with male or female contacts.



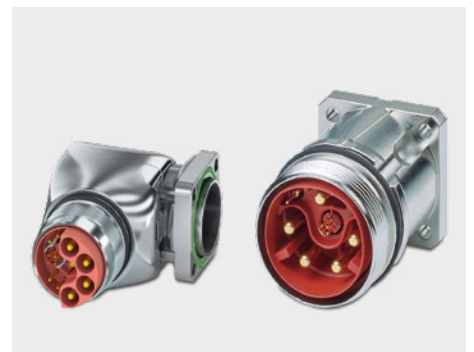
Preassembled M23 cables

Angled design with adjustable cable outlet direction, customer-specific assemblies and cable lengths available.







Visual color coding

Connection errors are prevented with customer-specific marking of the connectors with color rings.







Versatile device connection technology

Angled rotatable device connectors with infinitely variable adjustment of the outlet direction up to 310°.

M23, cable and coupler connectors			13(4+4+4+PE)-position		13 (8+4+PE)-position	
  Lead-free alternative items available	Signal type		Data, shielded		Signal, unshielded	
	Connection method		Crimp		Crimp	
	Rated voltage [V AC/DC]		50 / 50 / 630/850		50 / 630/850	
	Rated current ¹⁾ [A]		3.6 / 8 / 30		8 / 30	
	Number of contacts / diameter [mm]		4 x 0.8 / 4 x 1 / 5 x 2		8 x 1 / 5 x 2	
	Litz wire cross-sections [mm²]		0.06 ... 0.5 / 0.06 ... 1.0 / 0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors, SPEEDCON fast-locking system						
 	Cable clamping range [mm]	7.5 ... 18	1621529	1621517	1621534	1621524
		7.5 ... 9	1621530	1621520	1621535	1621525
		9 ... 12	1621531	1621521	1621536	1621526
		12 ... 15	1621532	1621522	1621537	1621527
		15 ... 18	1621533	1621523	1621538	1621528
Cable connectors, standard locking						
	Cable clamping range [mm]	7.5 ... 18	1622007	1621997	1622012	1622002
		7.5 ... 9	1622008	1621998	1622013	1622003
		9 ... 12	1622009	1621999	1622014	1622004
		12 ... 15	1622010	1622000	1622015	1622005
		15 ... 18	1622011	1622001	1622016	1622006
Coupler connectors						
	Cable clamping range [mm]	7.5 ... 18	1621549	1621539	1621554	1621544
		7.5 ... 9	1621550	1621540	1621555	1621545
		9 ... 12	1621551	1621541	1621556	1621546
		12 ... 15	1621552	1621542	1621557	1621547
		15 ... 18	1621553	1621543	1621558	1621548
Hybrid cables (accessories)						
	Cable length [m]	1	1623127		—	
		20	1622080		—	
		100	1623039		—	
		Hybrid cable, shielded, cable design: 5 x 2.5 + 2 x (2 x 0.5) + (4 x 22 AWG)C/C, outside cable diameter: 15.5 mm ±0.5 mm, suitable for drag chain applications, outer sheath color: orange, RAL 2003				

¹⁾ Rated current for maximum connection cross-section.





The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M23, cable and coupler connectors			15(6+4+4+PE)-position		9 (4+4+PE)-position	
 Web code: #0263  Lead-free alternative items available	Signal type		Data, shielded		–	
	Connection method		Crimp		Crimp	
	Rated voltage	[V AC/DC]	50 / 50 / 630/850		50 / 630/850	
	Rated current ¹⁾	[A]	3.6 / 8 / 30		8 / 30	
	Number of contacts / diameter	[mm]	6 x 0.6 / 4 x 1 / 5 x 2		4 x 1 / 5 x 2	
	Litz wire cross-sections	[mm ²]	0.06 ... 0.25 / 0.06 ... 1.0 / 0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors, SPEEDCON fast-locking system						
 	Cable clamping range ²⁾	[mm]				
		12 ... 15	1157072	1157073	1627107	1105729
Coupler connectors						
	Cable clamping range ²⁾	[mm]				
		12 ... 15	1762781	1762780	1105738	1762769

¹⁾ Rated current for maximum connection cross-section.





²⁾ Preferred types, other cable clamping ranges on request. The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M23, device connectors		13(4+4+4+PE)-position		13 (8+4+PE)-position	
Web code: #0264 RoHS Lead-free alternative items available	Signal type	Data, shielded		Signal, unshielded	
	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	50 / 50 / 630/850		50 / 630/850	
	Rated current ¹⁾ [A]	3.6 / 8 / 30		8 / 30	
	Number of contacts / diameter [mm]	4 x 0.8 / 4 x 1 / 5 x 2		8 x 1 / 5 x 2	
	Litz wire cross-sections [mm²]	0.06 ... 0.5 / 0.06 ... 1.0 / 0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1621569	1621567	1621570	1621568
Device connectors, with knurled nut, SPEEDCON fast-locking system, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm 	1096285	1096284	1096286	1096282
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1621565	1621563	1621566	1621564
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1621561	1621559	1621562	1621560
Device connectors, rear mounting					
	Central fastening M26 x 1	1627205	1624344	1627206	1627204













¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M23, device connectors		15(6+4+4+PE)-position		9 (4+4+PE)-position	
 Web code: #0264  Lead-free alternative items available	Signal type	Data, shielded		–	
	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	50 / 50 / 630/850		50 / 630/850	
	Rated current ¹⁾ [A]	3.6 / 8 / 30		8 / 30	
	Number of contacts / diameter [mm]	6 x 0.6 / 4 x 1 / 5 x 2		4 x 1 / 5 x 2	
	Litz wire cross-sections [mm²]	0.06 ... 0.25 / 0.06 ... 1.0 / 0.25 ... 4.0		0.06 ... 1.0 / 0.25 ... 4.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1568970	1568969	1762773	1762772
Device connectors, with knurled nut, SPEEDCON fast-locking system, front mounting					
 	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1568974	1568973	1762779	1762778
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1284853	1359727	1099395	1154847
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1568968	1568966	1105725	1762771
Device connectors, rear mounting					
	Central fastening M26 x 1	1568972	1568971	1762777	1762775

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M40, cable and coupler connectors			13(4+4+4+PE)-position		13(4+4+4+PE)-position																																			
Web code: #0560 RoHS Lead-free alternative items available <tr><td>Signal type</td><td colspan="2">Data, shielded</td><td colspan="2">Signal, unshielded</td></tr> <tr><td>Connection method</td><td colspan="2">Crimp</td><td colspan="2">Crimp</td></tr> <tr><td>Rated voltage [V AC/DC]</td><td colspan="2">50 / 500 / 630/850</td><td colspan="2">50 / 500 / 630/850</td></tr> <tr><td>Rated current ¹⁾ [A]</td><td colspan="2">3.6 / 8 / 70</td><td colspan="2">8 / 8 / 70</td></tr> <tr><td>Number of contacts / diameter [mm]</td><td colspan="2">4 x 0.8 / 4 x 1 / 5 x 3.6</td><td colspan="2">4 x 1 / 4 x 1 / 5 x 3.6</td></tr> <tr><td>Litz wire cross-sections [mm²]</td><td colspan="2">0.06 ... 0.5 / 0.06 ... 1.5 / 1.5 ... 16.0</td><td colspan="2">0.06 ... 1.0 / 0.06 ... 1.5 / 1.5 ... 16.0</td></tr> <tr><td>Pin assignment</td><td>Male</td><td>Female</td><td>Male</td><td>Female</td></tr> <tr><td></td><td></td><td></td><td></td><td></td></tr>	Signal type	Data, shielded		Signal, unshielded		Connection method	Crimp		Crimp		Rated voltage [V AC/DC]	50 / 500 / 630/850		50 / 500 / 630/850		Rated current ¹⁾ [A]	3.6 / 8 / 70		8 / 8 / 70		Number of contacts / diameter [mm]	4 x 0.8 / 4 x 1 / 5 x 3.6		4 x 1 / 4 x 1 / 5 x 3.6		Litz wire cross-sections [mm²]	0.06 ... 0.5 / 0.06 ... 1.5 / 1.5 ... 16.0		0.06 ... 1.0 / 0.06 ... 1.5 / 1.5 ... 16.0		Pin assignment	Male	Female	Male	Female					
	Signal type	Data, shielded		Signal, unshielded																																				
	Connection method	Crimp		Crimp																																				
	Rated voltage [V AC/DC]	50 / 500 / 630/850		50 / 500 / 630/850																																				
	Rated current ¹⁾ [A]	3.6 / 8 / 70		8 / 8 / 70																																				
	Number of contacts / diameter [mm]	4 x 0.8 / 4 x 1 / 5 x 3.6		4 x 1 / 4 x 1 / 5 x 3.6																																				
	Litz wire cross-sections [mm²]	0.06 ... 0.5 / 0.06 ... 1.5 / 1.5 ... 16.0		0.06 ... 1.0 / 0.06 ... 1.5 / 1.5 ... 16.0																																				
Pin assignment	Male	Female	Male	Female																																				
																																								

Cable connectors, SPEEDCON fast-locking system						
	Cable clamping range [mm]	9 ... 14	1623332	1623324	1623335	1623329
		14 ... 20.5	1623333	1623327	1623336	1623330
		20.5 ... 26.5	1623334	1623328	1623337	1623331

Coupler connectors						
	Cable clamping range [mm]	9 ... 14	1623356	1623339	1623359	1623344
		14 ... 20.5	1623357	1623341	1623360	1623345
		20.5 ... 26.5	1623358	1623342	1623361	1623346

Hybrid cables (accessories)					
	Cable length [m]	1	1627298		—
	Hybrid cable, shielded, cable design: (5 x 10 + 4 x 1.5 + (4 x 22 AWG)C)C, outside cable diameter: 21.4 mm ±0.7 mm, suitable for drag chain applications, outer sheath color: orange, RAL 2003	20	1627299		—





¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

M40, cable and coupler connectors			15(6+4+4+PE)-position		9 (4+4+PE)-position	
Web code: #0560 </						





¹⁾ Rated current for maximum connection cross-section.

²⁾ Preferred types, other cable clamping ranges on request. The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M40, device connectors		13(4+4+4+PE)-position		13(4+4+4+PE)-position	
Web code: #0560 RoHS Lead-free alternative items available	Signal type	Data, shielded		Signal, unshielded	
	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	50 / 500 / 630/850		50 / 500 / 630/850	
	Rated current ¹⁾ [A]	3.6 / 8 / 70		8 / 8 / 70	
	Number of contacts / diameter [mm]	4 x 0.8 / 4 x 1 / 5 x 3.6		4 x 1 / 4 x 1 / 5 x 3.6	
	Litz wire cross-sections [mm²]	0.06 ... 0.5 / 0.06 ... 1.5 / 1.5 ... 16.0		0.06 ... 1.0 / 0.06 ... 1.5 / 1.5 ... 16.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.2 mm	1623374	1623371	1623375	1623372
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.4 mm	1623368	1623365	1623369	1623366

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M40, device connectors		15(6+4+4+PE)-position		9 (4+4+PE)-position	
 Web code: #0560  Lead-free alternative items available	Signal type	Data, shielded		–	
	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	50 / 500 / 630/850		500 / 630/850	
	Rated current ¹⁾ [A]	3.6 / 8 / 70		8 / 70	
	Number of contacts / diameter [mm]	6 x 0.6 / 4 x 1 / 5 x 3.6		4 x 1 / 5 x 3.6	
	Litz wire cross-sections [mm²]	0.06 ... 0.25 / 0.06 ... 1.5 / 1.5 ... 16.0		0.06 ... 1.0 / 0.06 ... 1.5 / 1.5 ... 16.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.2 mm	1314981	1315000	1762785	1762784
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.4 mm	1314978	1314999	1099398	1762782

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M17 to M58 power connectors

Power connectors from Phoenix Contact are the right choice for the easy and time-saving connection of electrical drives at transmission capacities up to 150 A/630 V.

Characteristic features include the lateral, radial clip-in of contacts into the contact carrier and the elegant shield. This saves installation time and ensures fast and secure connection.



POWER

Power connectors up to 150 A/630 V

- Sizes M17, M23, M40, and M58
- Connectors with external thread suitable for standard and SPEEDCON locking
- 3+PE up to 5+3+PE
- Connection cross-sections up to 50 mm²
- IP67 degree of protection
- Plastic-molded designs



Web code:
#0255

Your advantages at a glance



Fast mounting

Lateral clip-in of contacts saves mounting time.



Simple shield

Protruding braided shield is simply screwed in, 360° shield connection.



Flexible connection

Numerous housing designs for the device and cable side in sizes M17 to M58.



Flexible cable outlet

Rotatable device connectors with infinitely variable adjustment of the outlet direction up to 310°.



Visual color coding

Mismatching is prevented with customer-specific marking of the connectors with color rings.



Simple device integration





Device connectors for front and rear mounting for various installation situations.

M17			4 (3+PE)-position	
Web code: #0266 / #0267 RoHS Lead-free alternative items available	Connection method		Crimp	
	Rated voltage [V AC/DC]		630	
	Rated current ¹⁾ [A]		25	
	Number of contacts / diameter [mm]		4 x 2	
	Litz wire cross-sections [mm²]		0.25 ... 2.5	
	Pin assignment		Male	Female
				
Cable connectors				
	Cable clamping range [mm]	5 ... 8	1607663	1607682
		8 ... 10	1607666	1607684
		10 ... 12.5	1624534	1624537
Coupler connectors				
	Cable clamping range [mm]	5 ... 8	1607670	1607688
		8 ... 10	1607671	1607689
		10 ... 12.5	1624536	1624539
Device connectors, front mounting, flange dimensions: 21.6 mm x 21.6 mm				
	Snap-in contact insert Mounting holes: 4 x Ø 2.7 mm		1607674	1607692
	Contact insert for support on the device Mounting holes: 4 x Ø 2.7 mm		1607675	1607694
Device connectors, front mounting, flange dimensions: 25.7 mm x 25.7 mm				
	Snap-in contact insert Mounting holes: 4 x Ø 3.2 mm		1619209	1619212
	Contact insert for support on the device Mounting holes: 4 x Ø 3.2 mm		1619186	1619189
Device connectors, angled, rotatable, front mounting				
	See the M17 PRO series, more information starting on page 16.			
Device connectors, front mounting, central fastening				
	Fastening thread: M18 x 0.75		1613544	1613546
	Accessories: M18 x 0.75 locking nut			
Device connectors, rear mounting, central fastening				
	Fastening thread: M20 x 1.5		1613545	1613547
	Accessories: M20 x 1.5 locking nut			

¹⁾ Rated current for maximum connection cross-section.





The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the "Accessories" area on the respective product page at phoenixcontact.com.

6 (5+PE)-position		7 (6+PE)-position		8 (7+PE)-position		9 (5+3+PE)-position	
Crimp		Crimp		Crimp		Crimp	
630		630		630		60 / 630	
14		14		14		3.6 / 14	
6 x 1		7 x 1		8 x 1		5 x 0.6 / 4 x 1	
0.06 ... 1.0		0.06 ... 1.0		0.06 ... 1.0		0.06 ... 0.5 / 0.06 ... 1.0	
Male	Female	Male	Female	Male	Female	Male	Female
							
1607699	1607717	1613558	1613577	1607735	1607755	1613600	1613619
1607701	1607719	1613560	1613579	1607737	1607758	1613602	1613621
1624540	1624543	1624546	1624549	1624552	1624555	1624636	1624638
1607706	1607723	1613564	1613583	1607741	1607764	1613606	1613625
1607707	1607724	1613565	1613584	1607742	1607765	1613607	1613626
1624542	1624545	1624548	1624551	1624554	1624557	1624653	1624654
1607710	1607727	1613569	1613588	1607746	1607768	1613611	1613630
1607711	1607728	1613570	1613589	1607747	1607769	1613612	1613631
1619213	1619214	1619215	1619216	1619217	1619218	1620462	1620461
1619190	1619191	1619192	1619193	1619194	1619195	1620460	1620459
1613548	1613550	1613553	1613572	1613590	1613592	1613595	1613614
1613831							
1613549	1613551	1613568	1613587	1613591	1613593	1613610	1613629
1600417							

M23			6 (5+PE)-position		8 (4+3+PE)-position	
 Web code: #0268  Lead-free alternative items available	Connection method		Crimp		Crimp	
	Rated voltage [V AC/DC]		630		250 / 630	
	Rated current ¹⁾ [A]		30		9 / 30	
	Number of contacts / diameter [mm]		6 x 2		4 x 1 / 4 x 2	
	Litz wire cross-sections [mm²]		0.06 ... 4.0		0.06 ... 1.0 / 0.06 ... 4.0	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors						
	Cable clamping range [mm] Short version Cable Ø 7.5 mm ... 14 mm	7.5 ... 14	–	1605532	–	1605602
		5.5 ... 8.5	–	1627038	–	1627033
		7.5 ... 9	–	1605524	–	1605595
		9 ... 11	–	1605526	–	1605596
		11 ... 14	–	1605529	–	1605597
	Cable clamping range [mm] Long version Cable Ø 7.5 mm ... 18 mm	7.5 ... 18	–	1605549	–	1605617
		7.5 ... 9	–	1605548	–	1605614
		9 ... 12	–	1605546	–	1605610
		12 ... 15	–	1605545	–	1605607
		15 ... 18	–	1605543	–	1605605
Coupler connectors						
	Cable clamping range [mm] Short version Cable Ø 7.5 mm ... 14 mm	7.5 ... 14	1605499	–	1605575	–
		5.5 ... 8.5	1627034	–	1627035	–
		7.5 ... 9	1605494	–	1605568	–
		9 ... 11	1605496	–	1605570	–
		11 ... 14	1605498	–	1605571	–
	Cable clamping range [mm] Long version Cable Ø 7.5 mm ... 18 mm	7.5 ... 18	1605510	–	1605583	–
		7.5 ... 9	1605509	–	1605582	–
		9 ... 12	1605508	–	1605581	–
		12 ... 15	1605507	–	1605580	–
		15 ... 18	1605505	–	1605578	–

¹⁾ Rated current for maximum connection cross-section.





The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M23		6 (5+PE)-position		8 (4+3+PE)-position	
 Web code: #0269 Lead-free alternative items available	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	630		250 / 630	
	Rated current ¹⁾ [A]	30		9 / 30	
	Number of contacts / diameter [mm]	6 x 2		4 x 1 / 4 x 2	
	Litz wire cross-sections [mm ²]	0.06 ... 4.0		0.06 ... 1.0 / 0.06 ... 4.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1605520	–	1605589	–
	Flange dimensions: 26 mm x 26 mm With reinforced contact carrier for angled mating connectors Mounting holes 4 x Ø 3.2 mm	1620619	–	1620620	–
Device connectors, angled, rotatable, front mounting					
	Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	1620657	–	1620660	–
	Flange dimensions: 28 mm x 28 mm Mounting holes: 4 x Ø 3.2 mm	1620661	–	1620662	–
Device connectors, with knurled nut, front mounting					
	Straight Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	–	1607082	–	1605622
	Angled Flange dimensions: 26 mm x 26 mm Mounting holes: 4 x Ø 3.2 mm	–	1607405	–	1607429
Panel feed-throughs, front mounting, male-female ²⁾					
	Fully wired internally and assembled with contacts, Mounting holes: 4 x Ø 3.2 mm	1605492		1605567	
Panel feed-throughs, rear mounting					
	Cable clamping range [mm] Short version Cable Ø 7.5 mm ... 14 mm Mounting holes: 4 x Ø 3.2 mm	7.5 ... 14	1605517	–	1607051
		7.5 ... 9	1605516	–	1607048
		9 ... 11	1607037	–	1607049
		11 ... 14	1607038	–	1607050
	Cable clamping range [mm] Long version Cable Ø 7.5 mm ... 18 mm Mounting holes: 4 x Ø 3.2 mm	7.5 ... 18	1605518	–	1607056
		7.5 ... 9	1607042	–	1607055
		9 ... 12	1607041	–	1607054
		12 ... 15	1607040	–	1607053
		15 ... 18	1607039	–	1607052

¹⁾ Rated current for maximum connection cross-section.





²⁾ Panel feed-through, male-female, only compatible with standard M23 screw locking mechanism.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M40			6 (2+3+PE)-position		8 (4+3+PE)-position	
Web code: #0270 RoHS Lead-free alternative items available	Connection method		Crimp		Crimp	
	Rated voltage [V AC/DC]		250 / 630		250 / 630	
	Rated current ¹⁾ [A]		30 / 70		30 / 70	
	Number of contacts / diameter [mm]		2 x 2 / 4 x 3.6		4 x 2 / 4 x 3.6	
	Litz wire cross-sections [mm²]		0.06 ... 4.0 / 0.25 ... 16.0		0.06 ... 4.0 / 0.25 ... 16.0	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors						
	Cable clamping range [mm]	9 ... 14	–	1613518	–	1613528
	Connection cross-section up to 16 mm²	14 ... 20.5	–	1613519	–	1613529
		20.5 ... 26.5	–	1613520	–	1613530
Coupler connectors						
	Cable clamping range [mm]	9 ... 14	1613425	–	1613431	–
	Connection cross-section up to 16 mm²	14 ... 20.5	1613426	–	1613432	–
		20.5 ... 26.5	1613427	–	1613433	–
Device connectors, front mounting						
	Straight Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.2 mm Connection cross-section up to 10 mm²		1613517	–	1613527	–
	Angled, rotatable Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.4 mm Connection cross-section up to 10 mm²		1620663	–	1620664	–





¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M40		6 (2+3+PE)-position		8 (4+3+PE)-position	
 Web code: #0272  RoHS Lead-free alternative items available	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	250 / 630		250 / 630	
	Rated current ¹⁾ [A]	30 / 70		30 / 70	
	Number of contacts / diameter [mm]	2 x 2 / 4 x 3.6		4 x 2 / 4 x 3.6	
	Litz wire cross-sections [mm²]	0.06 ... 4.0 / 0.25 ... 16.0		0.06 ... 4.0 / 0.25 ... 16.0	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, with knurled nut, standard locking, front mounting					
	Straight Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.2 mm Connection cross-section up to 16 mm²	—	1605823	—	1605865
	Angled Flange dimensions: 40 mm x 40 mm Mounting holes: 4 x Ø 4.2 mm Connection cross-section up to 16 mm²	—	1607532	—	1607543

¹⁾ Rated current for maximum connection cross-section.





Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

M58			6 (2+3+PE)-position		8 (4+3+PE)-position	
Web code: #0273 RoHS Lead-free alternative items available	Connection method		Crimp		Crimp	
	Rated voltage [V AC/DC]		250 / 630		250 / 630	
	Rated current ¹⁾ [A]		12 / 150		12 / 150	
	Number of contacts / diameter [mm]		2 x 1.6 / 4 x 10		4 x 1.6 / 4 x 10	
	Litz wire cross-sections [mm²]		0.75 ... 1.5 / 10 ... 50		0.75 ... 1.5 / 10 ... 50	
	Pin assignment		Male	Female	Male	Female
						
Cable connectors, standard locking						
	Cable clamping range [mm]	17 ... 25	–	1607503	–	1607508
		25 ... 36	–	1607501	–	1607507
Coupler connectors						
	Cable clamping range [mm]	17 ... 25	1607500	–	1607506	–
		25 ... 36	1607499	–	1607505	–

¹⁾ Rated current for maximum connection cross-section.

The cable clamping ranges specified may vary depending on the cable material and cable design. The user is responsible for selection and testing. Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.




POWER

M58		6 (2+3+PE)-position		8 (4+3+PE)-position	
 Web code: #0273  Lead-free alternative items available	Connection method	Crimp		Crimp	
	Rated voltage [V AC/DC]	250 / 630		250 / 630	
	Rated current ¹⁾ [A]	12 / 150		12 / 150	
	Number of contacts / diameter [mm]	2 x 1.6 / 4 x 10		4 x 1.6 / 4 x 10	
	Litz wire cross-sections [mm²]	0.75 ... 1.5 / 10 ... 50		0.75 ... 1.5 / 10 ... 50	
	Pin assignment	Male	Female	Male	Female
					
Device connectors, front mounting					
	Flange dimensions: 60 mm x 60 mm Mounting holes: 4 x Ø 5.4 mm	1615686	—	1615687	—

¹⁾ Rated current for maximum connection cross-section.

Please order crimp contacts separately. You will find the matching crimp contacts in the “Accessories” area on the respective product page at phoenixcontact.com.

SIGNAL

M17 and M23 signal connectors, plastic-molded			M17 straight	M23 straight	M23 angled
			17-position standard	12-position reverse	12-position reverse
Cable type			E01	E00	E00
Cable design [mm²]			3 × 2 × 0.14 + 2 × 0.5 + 4 × 0.14 + 4 × 0.22	4 × 2 × 0.25 + 2 × 0.5	4 × 2 × 0.25 + 2 × 0.5
Cable color			Green	Orange	Orange
Rated voltage [V AC/DC]			48 / 74	48 / 74	48 / 74
Rated current [A]			3.6	9	9
Temperature range, flexible [°C]			-30 ... +60	-20 ... +60	-20 ... +60
Temperature range, fixed [°C]			-30 ... +80	-40 ... +80	-40 ... +80
Grip / sheath / wire insulation material			TPU / TPU / TPM	TPU / TPU / PP	TPU / TPU / PP
Pin assignment			Female	Female	Female
 Web code: #0277  Lead-free alternative items available					
					
Free cable end	Pin assignment	Cable length			
		2 m	1624780	1619247	1619280
		5 m	1624781	1619248	1619281
		10 m	1624782	1619249	1619282
M17, male	17-pos.				
		2 m	1624778	—	—
		5 m	1624783	—	—
		10 m	1624784	—	—
M23, male	12- / 17-pos.				
		2 m	—	1619289	—
		5 m	—	1619290	—
		10 m	—	1619291	—





Customer-specific versions and lengths, also with SPEEDCON fast-locking system, are available on request.

Assignment: cable type E00, feedback, 12-position

Pin	Wire color	Pin	Wire color
1	PK	7	VT
2	RD	8	GY
3	BK	9	Outer shield
4	BU	10	WH
5	BN	11	n.c.
6	GN	12	BN

Assignment: cable type E01, feedback, 17-position

Pin	Wire color	Pin	Wire color
1	YE	10	BNRD
2	GN	11	BK
3	RD	12	BN
4	n.c.	13	OG
5	BU	14	WHBK
6	n.c.	15	BNGY
7	BNBU	16	BNYE
8	GNBK	17	n.c. Inner shields on housing
9	GNRD		


M23 straight	M23 angled	M23 straight	M23 angled
12-position standard	12-position standard	17-position standard	17-position standard
E00	E00	E01	E01
4 x 2 x 0.25 + 2 x 0.5	4 x 2 x 0.25 + 2 x 0.5	3 x 2 x 0.14 + 2 x 0.5 + 4 x 0.14 + 4 x 0.22	3 x 2 x 0.14 + 2 x 0.5 + 4 x 0.14 + 4 x 0.22
Orange	Orange	Green	Green
48 / 74	48 / 74	48 / 74	48 / 74
9	9	9	9
-20 ... +60	-20 ... +60	-30 ... +60	-30 ... +60
-40 ... +80	-40 ... +80	-30 ... +80	-30 ... +80
TPU / TPU / PP	TPU / TPU / PP	TPU / TPU / TPM	TPU / TPU / TPM
Female	Female	Female	Female
			
			
1619250	1619285	1619277	1619286
1619273	1619283	1619278	1619287
1619274	1619284	1619279	1619288
-	-	-	-
-	-	-	-
-	-	-	-
1619292	-	1619295	-
1619293	-	1619296	-
1619294	-	1619297	-

M23 hybrid connectors, plastic-molded			M23 straight		M23 angled	
			13(4+4+4+PE)-position (CAT5, 100 Mbps)			
Cable type			H00		H00	
Cable design [mm²]			(5 x 2.5 + 4 x 22 AWG/C + 4 x 0.5)C		(5 x 2.5 + 4 x 22 AWG/C + 4 x 0.5)C	
Cable color			Orange		Orange	
Rated voltage [V AC/DC]			630 / 850		630 / 850	
Rated current [A]			26 / 8		26 / 8	
Temperature range, flexible [°C]			-20 ... +80		-20 ... +80	
Temperature range, fixed [°C]			-40 ... +80		-40 ... +80	
Grip / sheath / wire insulation material			TPU / PUR / TPE, polyolefin		TPU / PUR / TPE, polyolefin	
Pin assignment			Female		Male	
</						

Customer-specific versions and lengths are available on request.

Assignment: cable type H00, hybrid, 4+4+4+PE							
Pin	Wire color		Cross-section	Pin	Wire color		Cross-section
			[mm²]				[mm²]
A	BK1		2.5	3	BK		0.5
B	BK2		2.5	4	GN		0.5
C	BK3		2.5	5	BU		0.34
D	BK4		2.5	6	YE		0.34
PE	GNYE		2.5	7	WH		0.34
1	BN		0.5	8	OG		0.34
2	VT		0.5				

POWER

M17 power connectors, plastic-molded			M17 straight		M17 straight	
			4 (3+PE)-position		6 (5+PE)-position	
Cable type			B00	B01	C00	C01
Cable design [mm²]			4x 1.5	4 x 2.5	4 x 0.75 + 2 x 0.5	4 x 1.0 + 2 x 0.5
Cable color			Orange	Orange	Orange	Orange
Rated voltage [V AC/DC]			630	630	630	630
Rated current [A]			18	26	12 / 9	15 / 9
Temperature range, flexible [°C]			-20 ... +60	-20 ... +70	-30 ... +70	-5 ... +70
Temperature range, fixed [°C]			-40 ... +80	-50 ... +80	-40 ... +80	-30 ... +70
Grip / sheath / wire insulation material			TPU / PUR / TPM	TPU / TPU / TPM	TPU / PUR / TPM	TPU / PUR / TPE
Pin assignment			Female	Female	Female	Female
 Web code: #0279  Lead-free alternative items available						
						
Free cable end	Pin assignment	Cable length				
		2 m	1619298	1619301	1619307	1619310
		5 m	1619299	1619302	1619308	1619311
		10 m	1619300	1619303	1619309	1619312
M17 straight, male	4- / 6-pos.					
		2 m	1619304	1619326	1619316	1619319
		5 m	1619305	1619327	1619317	1619321
		10 m	1619306	1619328	1619318	1619322

Customer-specific versions and lengths, also with SPEEDCON fast-locking system, are available on request. You will find versions with eight-wire conductors at phoenixcontact.com.

Assignment: cable type B00/B01, servo, 3+PE

Pin	Wire color		Function
1	BK U		U motor
2	BK V		V motor
3	BK W		W motor
PE	GNYE		.PE





Assignment: cable type C00, servo, 5+PE

Pin	Wire color		Function
1	BK1		U motor
6	BK2		V motor
7	BK3		W motor
PE	GNYE		PE
3	BK5		Brake
4	BK6		Brake

Assignment: cable type C01, servo, 5+PE

Pin	Wire color		Function
1	BK U		U motor
6	BK V		V motor
7	BK W		W motor
PE	GNYE		PE
3	BK		Brake
4	WH		Brake

POWER

M23 power connectors, plastic-molded			M23 straight		M23 straight	
			6 (5+PE)-position		8 (4+3+PE)-position	
Cable type			C02	C03	D02	D03
Cable design [mm²]			4 x 1.5 + 2 x 1.5	4 x 2.5 + 2 x 1.5	4 x 1.5 + 2 x 2 x 0.75	4 x 2.5 + 2 x 2 x 1.0
Cable color			Orange	Orange	Orange	Orange
Rated voltage [V AC/DC]			630	630	630 / 250	630 / 250
Rated current [A]			18	26 / 18	18 / 12	26 / 12
Temperature range, flexible [°C]			-20 ... +60	-20 ... +70	-20 ... +60	-20 ... +60
Temperature range, fixed [°C]			-40 ... +80	-50 ... +80	-40 ... +80	-40 ... +80
Grip / sheath / wire insulation material			TPU / PUR / TPM	TPU / TPU / TPM	TPU / PUR / TPM	TPU / PUR / TPM
Pin assignment			Female		Female	
 Web code: #0280 RoHS Lead-free alternative items available						
						
Free cable end	Pin assignment	Cable length				
		2 m	1618957	1620396	1620399	1620402
		5 m	1618958	1620397	1620400	1620404
		10 m	1618959	1620398	1620401	1620405
M23 straight, male	6- / 8-pos.					
	 	2 m	1618964	1620406	1620409	1620412
		5 m	1618965	1620407	1620410	1620413
		10 m	1618966	1620408	1620411	1620414

Customer-specific versions and lengths, also with SPEEDCON fast-locking system, are available on request. You will find versions with 4 x 4.0 mm² / 5 x 4.0 mm² conductors at phoenixcontact.com.



Assignment: cable type C02/C03, servo, 5+PE

Pin	Wire color	Function
1	BK U	U motor
6	BK V	V motor
7	BK W	W motor
PE	GN YE	PE
3	BK	Brake
4	WH	Brake

Assignment: cable type D02/D03, servo, 4+3+PE

Pin	Wire color	Function
1	BK 1	U motor
3	BK 2	V motor
4	BK 3	W motor
PE	GN YE	PE
A	BK 5	Brake
B	BK 6	Brake
C	BK 7	Temp +
D	BK 8	Temp -

POWER

M23 power connectors, plastic-molded		M23 angled		M23 angled	
		6 (5+PE)-position		8 (4+3+PE)-position	
Cable type		C02	C03	D02	D03
Cable design [mm²]		4 x 1.5 + 2 x 1.5	4 x 2.5 + 2 x 1.5	4 x 1.5 + 2 x 2 x 0.75	4 x 2.5 + 2 x 2 x 1.0
Cable color		Orange	Orange	Orange	Orange
Rated voltage [V AC/DC]		630	630	630 / 250	630 / 250
Rated current [A]		18	26 / 18	18 / 12	26 / 12
Temperature range, flexible [°C]		-20 ... +60	-20 ... +70	-20 ... +60	-20 ... +60
Temperature range, fixed [°C]		-40 ... +80	-50 ... +80	-40 ... +80	-40 ... +80
Grip / sheath / wire insulation material		TPU / PUR / TPM	TPU / TPU / TPM	TPU / PUR / TPM	TPU / PUR / TPM
Pin assignment		Female		Female	
 Web code: #0280  Lead-free alternative items available					
					
Free cable end		Cable length			
	2 m	1620415	1620418	1620421	1620424
	5 m	1620416	1620419	1620422	1620425
	10 m	1620417	1620420	1620423	1620426

Customer-specific versions and lengths, also with SPEEDCON fast-locking system, are available on request.
You will find versions with 4 x 4.0 mm² / 5 x 4.0 mm² conductors at phoenixcontact.com.

Assignment: cable type C02/C03, servo, 5+PE

Pin	Wire color		Function
1	BK U		U motor
6	BK V		V motor
7	BK W		W motor
PE	GN YE		PE
3	BK		Brake
4	WH		Brake

Assignment: cable type D02/D03, servo, 4+3+PE

Pin	Wire color		Function
1	BK 1		U motor
3	BK 2		V motor
4	BK 3		W motor
PE	GN YE		PE
A	BK 5		Brake
B	BK 6		Brake
C	BK 7		Temp +
D	BK 8		Temp -

Excellent services

Throughout your development process, Phoenix Contact will provide excellent services that make the difference. Discover how modern configurators, comprehensive technical data, and free product samples can make your daily work easier. As your partner, we will support you in the design-in process all the way to the development of customized connection and housing solutions.

The easy way to more choice

Choose online from 60,000 products and find the right solution quickly:

- Intuitive filter and search functions
- Comprehensive technical data for download including drawings and 3D models
- Personal on-site consultation

The easy way to more individuality

Customize your products with colors, printing, and special designs:

- Customer-specific versions
- Customized new products
- Intuitive online configurators

The easy way to more flexibility

Use our different procurement channels and benefit from worldwide availability:

- All items can be ordered simply online
- Free online sample service
- Globally reliable logistics through direct shipping or distribution


The easy way to more expertise

Always stay up to date on technologies and trends with us as your reliable partner:

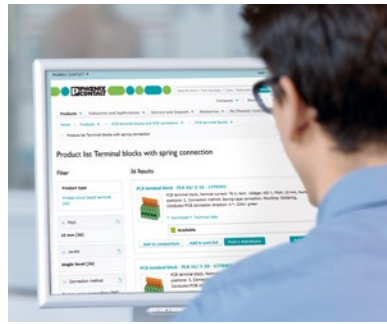
- Technology, industry, and design-in experts at your side
- We will provide you with custom training programs – either on site or digitally
- Free webinars, seminars, and video tutorials

Further information on Phoenix Contact services: simply enter the web code in the search field on our website.

 Web code: #2594



Simple selection using filters and technical data



There is a separate detail page for every product



A data sheet is available to download for every item



With our global network, Phoenix Contact is always nearby



Device connection technology can be comprehensively configured



Housing parts and connection technology are easy to configure



Cable and assembly systems can be matched easily



Phoenix Contact provides support from the initial idea right through to series production



Our online sample service is available in a large number of countries



Find the product you want quickly with intuitive filters



Product samples are available with free shipping



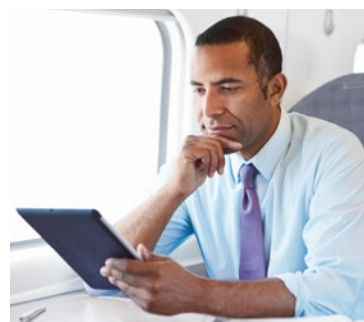
Reliable logistics worldwide



Keep up to date on new products, trends, and technologies



We will provide you with custom training programs – either on site or digitally



Stay updated via the Phoenix Contact apps and the Phoenix Contact YouTube channel



Remain reliably updated with the Phoenix Contact newsletter

Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing forward-thinking products and solutions for the comprehensive electrification, networking, and automation of all sectors of the economy and infrastructure. With a global network, we maintain close relationships with our customers, something we believe is essential for our common success.

You can find your local partner at
phoenixcontact.com

