

# AI 2,5 - 8 GY-B - Ferrule

3201550

<https://www.phoenixcontact.com/au/products/3201550>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ferrule, Length contact range: 8 mm, sleeve length: 14 mm, color: gray



## Your advantages

- The taped ferrules were developed specifically for the CF 3000-2,5 automatic crimping device
- Available in the main color ranges up to 2.5 mm<sup>2</sup>
- Can be used to wire all terminal blocks, especially those of the CLIPLINE complete system

## Commercial data

Item number	3201550
Packing unit	500 pc
Minimum order quantity	500 pc
Sales key	BH3414
Product key	BH3414
Catalog page	Page 515 (C-3-2019)
GTIN	4017918126261
Weight per piece (including packing)	0.243 g
Weight per piece (excluding packing)	0.243 g
Customs tariff number	85369010
Country of origin	DE

# AI 2,5 - 8 GY-B - Ferrule

3201550

<https://www.phoenixcontact.com/au/products/3201550>



## Technical data

### Product properties


Product type	Cable end sleeve
Conductor category	stranded conductors, class 2, 5, 6 / B, C, K, M
Product property	Taped design for automated production
	UL certified
	Made from soft tin-plated electrolytic copper
	Correspond to the requirements of DIN 46228-1 and UL 486F in terms of size
	Plastic collar made of polypropylene
	Halogen-free
	Long/short-term temperature: +105°C/+120°C

### Connection data

#### Conductor connection

Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG max.	14
Stripping length	11 mm

### Dimensions

Dimensional drawing	
Sleeve length	14 mm
Length contact range	8 mm
Maximum stripping length	11 mm
Ferrule diameter	2.3 mm
Sleeve wall thickness	0.15 mm
Insulating collar thickness	0.3 mm
Inner dimensions of the insulating collar	4.2 mm

### Material specifications

Color	gray (RAL 7042)
Material	CU-DHP
Flammability rating according to UL 94	HB
Coating	galvanically tin-plated
Surface characteristics	Tin-plated
Components	free from silicone and halogen

### Mechanical properties

# AI 2,5 - 8 GY-B - Ferrule

3201550

<https://www.phoenixcontact.com/au/products/3201550>



## Technical data

Sleeve length	14 mm
---------------	-------

## Environmental and real-life conditions

### Ambient conditions

Permanent temperature	105 °C (-40 °C no load / 0 °C dynamic load)
Short-term temperature	120 °C

## Standards and regulations

Design according to standard	UL 486F-E, NF C 63-023
------------------------------	------------------------

# Al 2,5 - 8 GY-B - Ferrule


3201550

<https://www.phoenixcontact.com/au/products/3201550>



## Drawings

Dimensional drawing

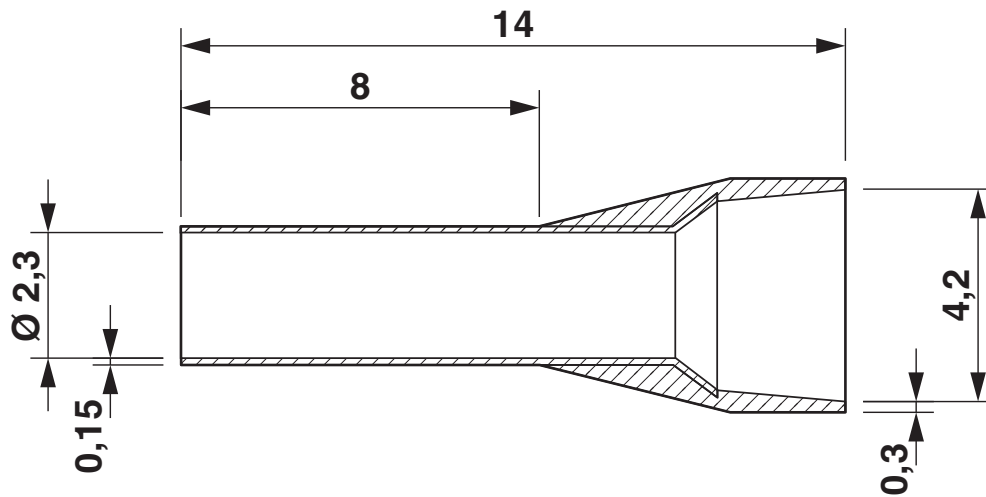

# AI 2,5 - 8 GY-B - Ferrule

3201550

<https://www.phoenixcontact.com/au/products/3201550>



## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3201550>



**cULus Listed**

Approval ID: E488001

# AI 2,5 - 8 GY-B - Ferrule



3201550

<https://www.phoenixcontact.com/au/products/3201550>

## Classifications

### ECLASS

ECLASS-13.0	27400201
-------------	----------

### ETIM

ETIM 9.0	EC000005
----------	----------

### UNSPSC

UNSPSC 21.0	27121700
-------------	----------

# AI 2,5 - 8 GY-B - Ferrule



3201550  
<https://www.phoenixcontact.com/au/products/3201550>

## Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)