

2744610

https://www.phoenixcontact.com/au/products/2744610

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch panel, one RJ45 jack to 4 screw connection terminal blocks (assignment 1, 2, 3, 6), CAT5e, 10/100 Mbps, DIN rail adapter, IP20, shield contacting on DIN rail

Product description

Ethernet patch panels enable quick and easy connection between the field cabling and control cabinet cabling. The passive termination panels are a convenient alternative to the on-site assembly of RJ45 connectors.

Your advantages

- · Safe shield connection to ground potential
- · Mounting on a DIN rail
- 10/100 Mbps
- CAT5e
- · Shipbuilding approval in accordance with DNV GL

Commercial data

Item number	2744610
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	DNC331
Product key	DNC331
GTIN	4017918819477
Weight per piece (including packing)	50.7 g
Weight per piece (excluding packing)	42.748 g
Customs tariff number	85366990
Country of origin	DE



2744610

https://www.phoenixcontact.com/au/products/2744610

Technical data

Notes

Note on application

Note on application Only for industrial use

Product properties

Product type	Patch panel
MTBF	6702 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))
	2962 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day))

Electrical properties

Supply

• • •	
Typical current consumption	< 1 A

Interfaces

Data: Ethernet interface, 10/100Base-T(X) in accordance with IEEE 802.3


Serial transmission speed	10/100 Mbps
Connection method	Screw connection
No. of channels	1
Tightening torque	0.22 Nm 0.25 Nm
Pin assignment	1:1
Transmission length	100 m (including patch cables)
Single conductor/terminal point, rigid	0.14 mm² 1.5 mm²
Single-wire/terminal point, flexible	0.14 mm² 1 mm²
Single-wire/terminal point, rigid AWG max.	16
Single-wire/terminal point, rigid AWG min.	26

Data: Ethernet interface, 10/100Base-T(X) in accordance with IEEE 802.3

Connection method	RJ45 CAT5e
No. of channels	1

Dimensions

Dimensional drawing





2744610

Mounting

Mounting type

https://www.phoenixcontact.com/au/products/2744610

Height	90 mm
Depth	52 mm
terial specifications	
Color (Housing)	green (RAL 6021)
Material (Housing)	PVC / PA
ble/line	
External cable diameter	6 mm 10 mm
Cable impedance	100 Ω
echanical properties	
Mechanical data	
Insertion/withdrawal cycles	≤ 2500
echanical tests	
Vibration resistance in accordance with EN 60068-2-	: 5g, 10150 Hz, 2.5 h, in XYZ direction
6/IEC 60068-2-6	
6/IEC 60068-2-6 Shock in accordance with EN 60068-2-27/IEC 60068-2-27 avironmental and real-life conditions	: 25g, 11 ms period, half-sine shock pulse
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 nvironmental and real-life conditions Ambient conditions	
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection	IP20
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation)	
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection	IP20 -25 °C 70 °C
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport)	IP20 -25 °C 70 °C -25 °C 85 °C
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation)	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation)	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation)	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C 25 % 95 % (non-condensing)
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation) Oprovals Shipbuilding Identification	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation) Oprovals Shipbuilding Identification Shipbuilding data	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C 25 % 95 % (non-condensing)
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation) Oprovals Shipbuilding Identification Shipbuilding data Temperature	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C 25 % 95 % (non-condensing)
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation) Oprovals Shipbuilding Identification Shipbuilding data	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C 25 % 95 % (non-condensing)
Shock in accordance with EN 60068-2-27/IEC 60068-2-27 Invironmental and real-life conditions Ambient conditions Degree of protection Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Permissible humidity (operation) Oprovals Shipbuilding Identification Shipbuilding data Temperature Humidity	IP20 -25 °C 70 °C -25 °C 85 °C -10 °C 70 °C 25 % 95 % (non-condensing)

DIN rail mounting





https://www.phoenixcontact.com/au/products/2744610



Drawings

Dimensional drawing

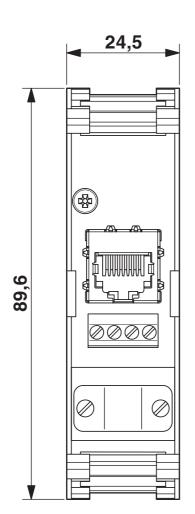

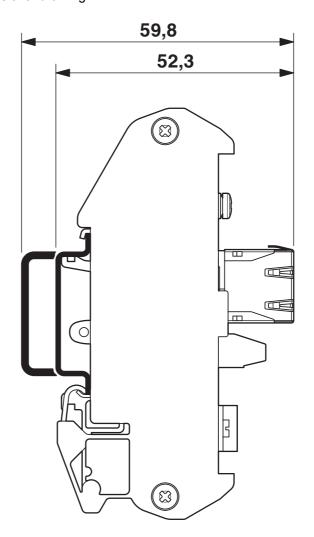


Dimensional drawing



2744610

https://www.phoenixcontact.com/au/products/2744610

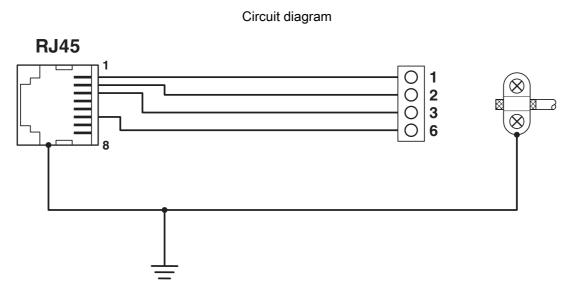

Circuit diagram



2744610

https://www.phoenixcontact.com/au/products/2744610

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/au/products/2744610



EAC

Approval ID: RU D-DE.GB09.B.00312



DNV GL

Approval ID: TAA00001KR



2744610

https://www.phoenixcontact.com/au/products/2744610

Classifications

UNSPSC 21.0

ECLASS

	ECLASS-13.0	19170112
	ECLASS-15.0	19170112
ET	ТІМ	
	ETIM 9.0	EC001128
UN	ISPSC	

43223300



2744610

https://www.phoenixcontact.com/au/products/2744610

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT PTY Ltd Unit 7, 2-8 South Street Rydalmere NSW 2116 1300 786 411 customerservice@phoenixcontact.com.au