


2862990

<https://www.phoenixcontact.com/au/products/2862990>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Inline terminal for power distribution (GND), complete with accessories, (connector and labeling field) connections for GND

Product description

The terminal is designed for use within an Inline station. The terminal has eight GND connections. They therefore enable connection to the station-internal GND of sensors and actuators, which are connected to the IB IL 24 DI.../HD-PAC or IB IL 24 DO.../HD-PAC terminal via 1-conductor technology. They therefore enable connection to the station-internal GND of actuators, which are connected to the IB IL 24 DO 32/HD terminal via 1-conductor technology.

Your advantages

- Connections for GND

Commercial data


Item number	2862990
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRI124
Product key	DRI124
GTIN	4017918910099
Weight per piece (including packing)	75 g
Weight per piece (excluding packing)	75 g
Customs tariff number	85389099
Country of origin	DE

2862990

<https://www.phoenixcontact.com/au/products/2862990>

Technical data

Dimensions

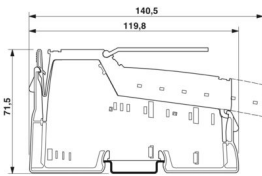Dimensional drawing	
Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm

Notes

Note on application	
Note on application	Only for industrial use

Interfaces

Inline local bus	
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps

System properties

Module	
ID code (dec.)	none
ID code (hex)	none
Register length	0 bit
Required parameter data	0 Byte
Required configuration data	0 Byte

Product properties

Product type	I/O component
Product family	Inline
Type	modular

Insulation characteristics	
Protection class	III (IEC 61140, EN 61140, VDE 0140-1)

Electrical properties

Maximum power dissipation for nominal condition	0 W
Test section	24 V supply (I/O) / functional ground 500 V AC 50 Hz 1 min

2862990

<https://www.phoenixcontact.com/au/products/2862990>

Supply

I/O voltage	GND
Max. current consumption	8 A

Connection data

Connection technology

Connection name	Inline connector
-----------------	------------------

Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.08 mm² ... 1.5 mm²
Conductor cross section flexible	0.08 mm² ... 1.5 mm²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.08 mm² ... 1.5 mm²
Conductor cross section, flexible	0.08 mm² ... 1.5 mm²
Conductor cross section AWG	28 ... 16
Stripping length	8 mm

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	75 % ... 85 %
Permissible humidity (storage/transport)	75 % ... 85 %

Mounting

Mounting type	DIN rail mounting
---------------	-------------------


Drawings

Dimensional drawing

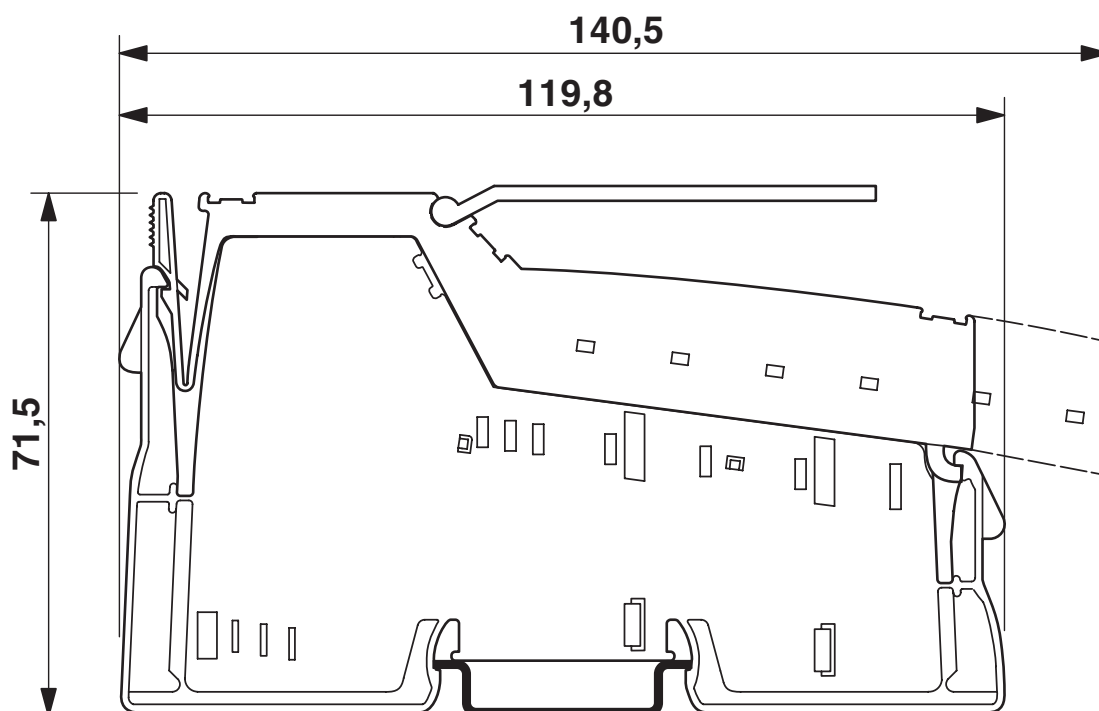

Connection diagram

E.g., for single-wire
connection with
IB IL 24 DO 32/HD

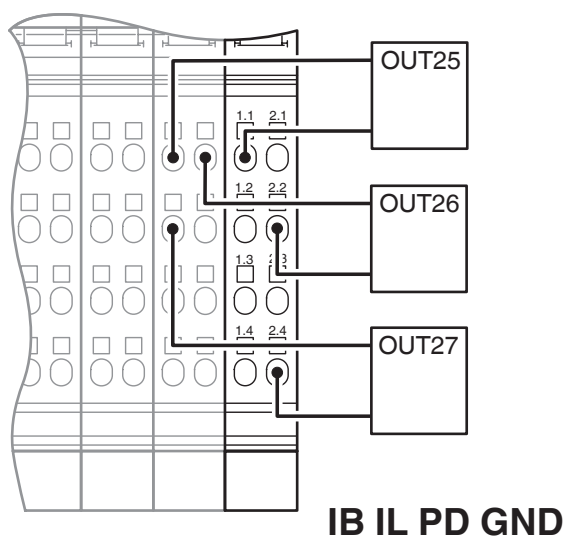

IB IL PD GND-PAC - Potential distributors



2862990

<https://www.phoenixcontact.com/au/products/2862990>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2862990>



LR

Approval ID: LR23398855TA



BV

Approval ID: 20989_C1 BV

ABS

Approval ID: 22-2226444-PDA

DNV

Approval ID: TAA00002CU

IB IL PD GND-PAC - Potential distributors



2862990

<https://www.phoenixcontact.com/au/products/2862990>

Classifications

ECLASS

ECLASS-13.0	27242692
ECLASS-15.0	27242692

ETIM

ETIM 9.0	EC002584
----------	----------

UNSPSC

UNSPSC 21.0	32151600
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%