

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors and light grids up to SIL 3, Cat. 4, PL e, 1 or 2-channel operation, automatic or manual, monitored start, 3 enabling current paths,  $U_S = 24 \text{ V DC}$ , pluggable Push-in terminal block

## Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Low housing width of just 12.5 mm
- 2 channel control
- 3 enabling current paths, 1 digital signal output
- Manually monitored and automatic activation in a single device

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2700570       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | DNA181        |
| Product key                          | DNA181        |
| GTIN                                 | 4046356912532 |
| Weight per piece (including packing) | 172.69 g      |
| Weight per piece (excluding packing) | 139.89 g      |
| Customs tariff number                | 85371098      |
| Country of origin                    | DE            |

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

## Technical data

### Notes

#### Note on application

|                     |                         |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

### Product properties

|                |  |
|----------------|--|
| Product type   | Safety relays  |
| Product family | PSRmini  |
| Application    | Emergency stop   |
|                | Safety door  |
|                | Light grid   |
|                | Magnetic switch  |
|                | Transponder  |
| Control        | 2-channel  |
| Relay type     | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

#### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 2   |

#### Times

|                               |  |
|-------------------------------|--|
| Typical response time         | < 175 ms (automatic start)                 |
|                               | < 175 ms (manual, monitored start)         |
| Typ. starting time with $U_S$ | < 250 ms (when controlled via A1)          |
| Typical release time          | < 20 ms (on demand via the sensor circuit) |
|                               | < 20 ms (on demand via A1)                 |
| Restart time                  | < 1 s (Boot time)                          |
| Recovery time                 | < 500 ms                                   |
| Start pulse length            | $\geq 500$ ms (manual start)               |

### Electrical properties

|   |   |
|---|---|
| Maximum power dissipation for nominal condition | 4.8 W ( $U_S = 26.4$ V, $I_L^2 = 48$ A <sup>2</sup> , $P_{\text{Total max}} = 2.4$ W + 2.4 W) |
| Nominal operating mode                          | 100% operating factor   |
| Rated insulation voltage                        | 250 V AC  |
| Rated surge voltage/insulation                  | See data sheet, section "Insulation coordination".  |

#### Supply

|  |  |
|--|--|
| Designation                                | A1/A2  |
| Rated control circuit supply voltage $U_S$ | 20.4 V DC ... 26.4 V DC                        |
| Rated control circuit supply voltage $U_S$ | 24 V DC -15 % / +10 %                          |
| Rated control supply current $I_S$         | typ. 80 mA                                     |
| Power consumption at $U_S$                 | typ. 1.92 W                                    |
| Inrush current                             | typ. 5 A ( $\Delta t = 200$ $\mu$ s at $U_S$ ) |

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

|                    |   |
|--------------------|---|
| Filter time        | 1 ms (at A1 in the event of voltage dips at $U_S$ )           |
| Protective circuit | Serial protection against polarity reversal; Suppressor diode |

## Input data

Digital: Sensor circuit (S12, S22)

|   |   |
|---|---|
| Description of the input                      | safety-related sensor inputs  |
| Number of inputs                              | 2   |
| Input voltage range "0" signal                | 0 V DC ... 5 V DC (for safe Off; at S12 and S22)  |
| Input current range "0" signal                | 0 mA ... 2 mA (for safe Off; at S12 and S22)  |
| Inrush current                                | < 20 mA (typ. with $U_S$ at S12)<br>< 5 mA (typ. with $U_S$ at S22)                         |
| Filter time                                   | max. 1.5 ms (Test pulse width of low test pulses)<br>Test pulse rate = 5 x Test pulse width |
| Concurrence                                   | $\infty$  |
| Max. permissible overall conductor resistance | 150 $\Omega$  |
| Protective circuit                            | Suppressor diode  |
| Current consumption                           | < 5 mA (typ. with $U_S$ )   |

Digital: Start circuit (S34)

|   |   |
|---|---|
| Description of the input                      | non-safety-related  |
| Number of inputs                              | 1   |
| Input voltage range "1" signal                | 20.4 V DC ... 26.4 V DC   |
| Inrush current                                | typ. 200 mA (typ. with $U_S$ )  |
| Max. permissible overall conductor resistance | 150 $\Omega$  |
| Protective circuit                            | Suppressor diode  |
| Current consumption                           | < 10 mA (typ. with $U_S$ at S34/24 V)<br>> -5 mA (typ. with $U_S$ at S34/0 V) |

## Output data

Relay: Enabling current paths (13/14, 23/24, 33/34)

|                             |   |
|-----------------------------|---|
| Output description          | 2 N/O contacts each in series, safety-related, floating |
| Number of outputs           | 3 (undelayed)   |
| Contact switching type      | 3 enabling current paths                                |
| Contact material            | AgSnO <sub>2</sub>                                      |
| Switching voltage           | min. 12 V AC/DC<br>max. 250 V AC/DC                     |
| Switching capacity          | min. 60 mW  |
| Inrush current              | min. 3 mA<br>max. 6 A                                   |
| Limiting continuous current | 6 A   |
| Sq. Total current           | 48 A <sup>2</sup> (observe derating)                    |
| Switching frequency         | 0.1 Hz  |
| Mechanical service life     | 10x 10 <sup>6</sup> cycles                              |
| Output fuse                 | 6 A gL/gG   |

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

|  |   |
|--|---|
|  | 4 A gL/gG (for low-demand applications) |
|--|---|

Signal: M1

|                        |   |
|------------------------|---|
| Output description     | non-safety-related                            |
| Number of outputs      | 1 (digital, PNP)                              |
| Voltage                | 22 V DC ( $U_s - 2 \text{ V}$ )               |
| Current                | max. 100 mA                                   |
| Maximum inrush current | 500 mA ( $\Delta t = 1 \text{ ms}$ at $U_s$ ) |
| Protective circuit     | Suppressor diode                              |

## Connection data

Connection technology

|           |     |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

|   |  |
|---|--|
| Connection method   | Push-in connection   |
| Conductor cross-section rigid   | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                  |
| Conductor cross-section flexible                                      | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                                  |
| Conductor cross-section, flexible, with ferrule, with plastic sleeve  | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6) |
| Conductor cross-section flexible, with ferrule without plastic sleeve | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6) |
| Conductor cross-section AWG   | 24 ... 16  |
| Stripping length  | 8 mm   |

## Signaling

|                           |                 |
|---------------------------|-----------------|
| Status display            | 3 x LED (green) |
| Operating voltage display | 1 x LED (green) |

## Dimensions

|        |          |
|--------|----------|
| Width  | 12.5 mm  |
| Height | 116.6 mm |
| Depth  | 114.5 mm |

## Material specifications

|                  |                   |
|------------------|-------------------|
| Color (Housing)  | yellow (RAL 1018) |
| Housing material | PA                |

## Characteristics

Safety data

|               |   |
|---------------|---|
| Stop category | 0 |
|---------------|---|

Safety data: EN ISO 13849

|                        |  |
|------------------------|--|
| Category               | 4  |
| Performance level (PL) | e (4 A DC13; 5 A AC15; 8760 switching cycles/year) |

Safety data: IEC 61508 - High demand

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

|                                     |   |
|-------------------------------------|---|
| Safety Integrity Level (SIL)        | 3 |
| Safety data: IEC 61508 - Low demand |   |
| Safety Integrity Level (SIL)        | 3 |
| Safety data: EN IEC 62061           |   |
| Safety Integrity Level (SIL)        | 3 |

## Environmental and real-life conditions

### Ambient conditions

|  |   |
|--|---|
| Degree of protection                           | IP20  |
| Min. degree of protection of inst. location    | IP54  |
| Ambient temperature (operation)                | -40 °C ... 55 °C (observe derating)                 |
| Ambient temperature (storage/transport)        | -40 °C ... 85 °C                                    |
| Maximum altitude                               | ≤ 2000 m (Above sea level)                          |
| Max. permissible humidity (storage/transport)  | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock  | 15g   |
| Vibration (operation)                          | 10 Hz ... 150 Hz, amplitude 0.15 mm, 2g             |

## Approvals

### CE

|                |              |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

## Mounting

|                   |                        |
|-------------------|------------------------|
| Mounting type     | DIN rail mounting      |
| Assembly note     | See derating curve     |
| Mounting position | vertical or horizontal |


PSR-MC40-3NO-1DO-24DC-SP - Safety relays




2700570  
<https://www.phoenixcontact.com/au/products/2700570>

Drawings

Circuit diagram

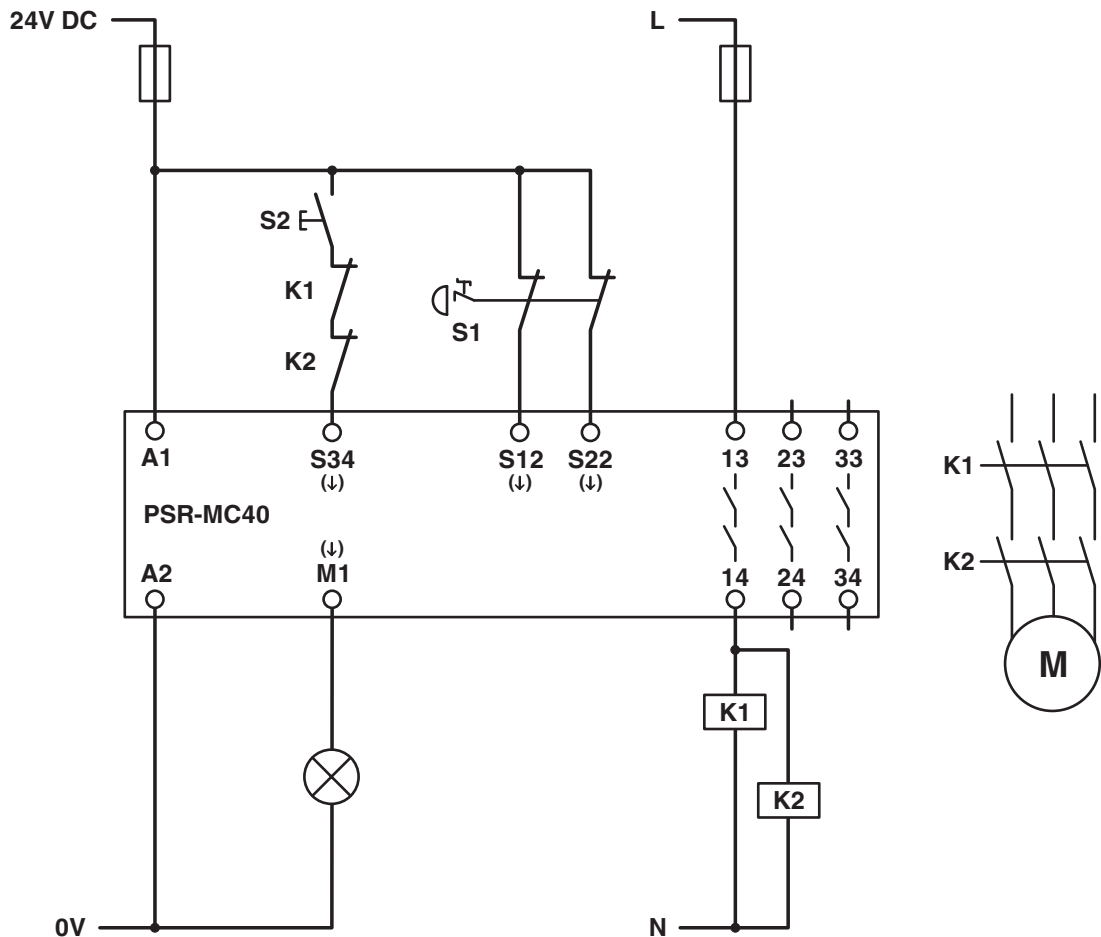

Block diagram

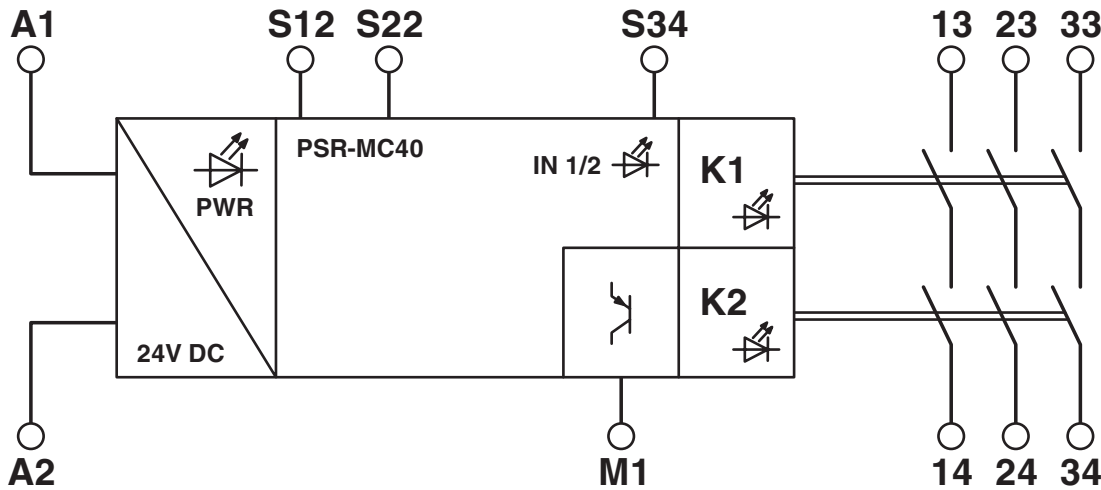

Block diagram


# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

Block diagram

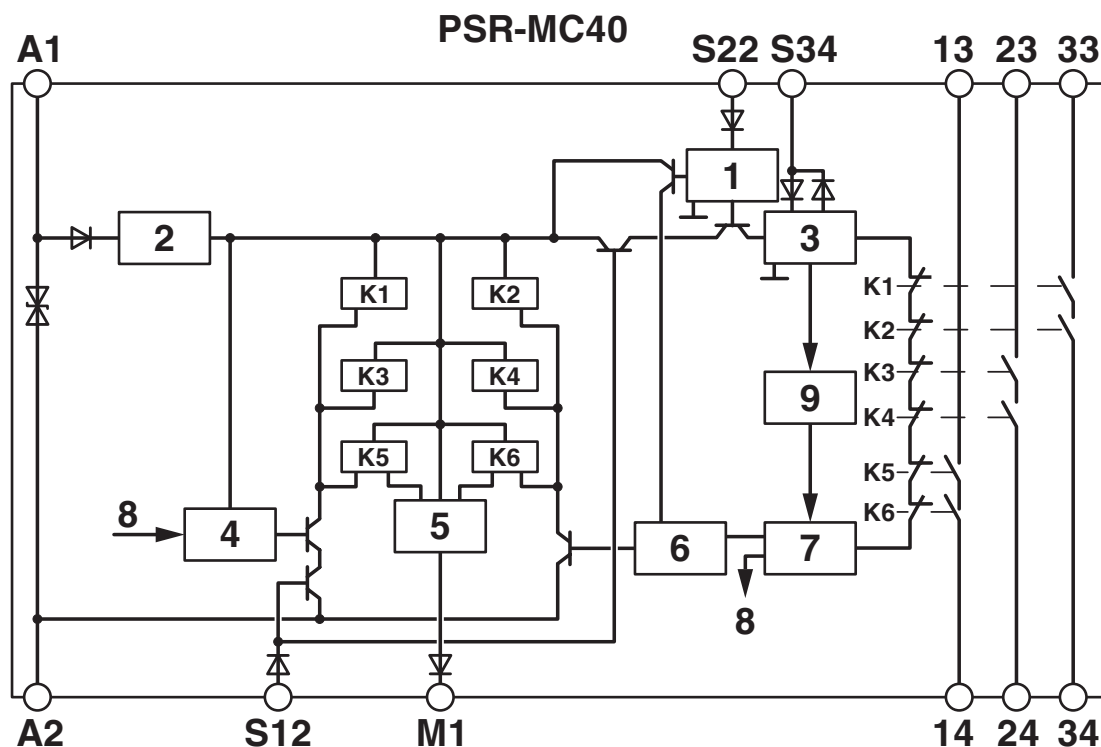

## Key:

1 = Input circuit

2 = Voltage limitation

3 = Start circuit

4 = Control circuit channel 1

5 = Control circuit signal output

6 = Control circuit channel 2

7 = Start channel 1 and 2

8 = Channel 1

9 = Diagnostics

K1, K2 ... K6 = Force-guided elementary relays


# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/2700570>



### Functional Safety

Approval ID: 44 205 13755201



### Functional Safety

Approval ID: 44 780 13755201



### cULus Listed

Approval ID: E140324



# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

## Classifications

### ECLASS

|                   |          |
|-------------------|----------|
| ECLASS-13.0       | 27371819 |
| ECLASS-15.0       | 27371819 |
| ECLASS-15.0 ASSET | 27250101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

# PSR-MC40-3NO-1DO-24DC-SP - Safety relays



2700570

<https://www.phoenixcontact.com/au/products/2700570>

## Environmental product compliance

### EU RoHS

|   |              |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 6eddaf88-97ff-4762-a24a-2e5e8897c811 |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)