

Data Sheet for Article: YRTS0626--

Screw Type terminal socket I/O with pinning 5mm


for XT, RT2x, RT3x, RT4x relays



Technical Data

Net weight (kg)	0,04
Connection type	Screw clamps
Initial breakdown voltage	
Between contact and coil	4000V/S
Rated voltage	300V
Rated current (A)	10
Max. tightening torque (Nm)	1
Temperature range - Operation (°C)	-40 to +85
Solid wire diameter (mm ²)	0.5 - 2.5
Flexible wire diameter (mm ²)	0.5 - 2.5
Flexible wire with ferrule (diameter) (mm ²)	0.5 - 2.5

Dimensioned drawing: Screw Type terminal socket I/O with pinning 5mm

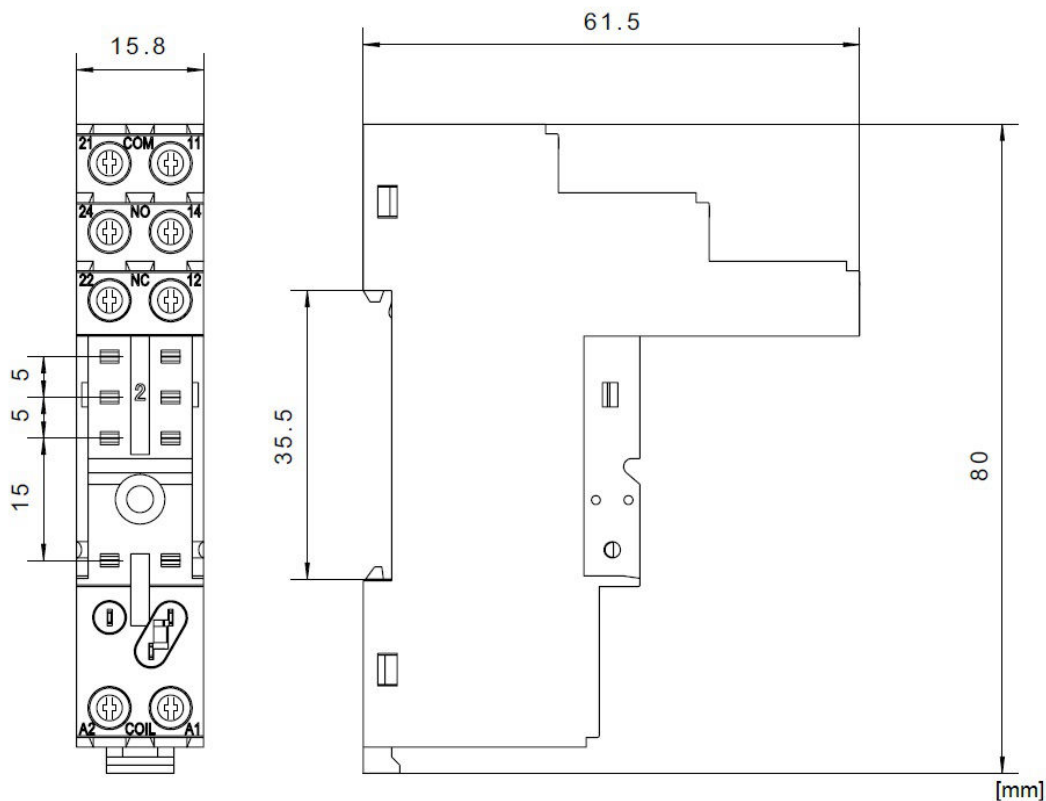

Article Table

DESCRIPTION	Order No.
Screw Type terminal socket I/O with pinning 5mm for XT, RT2x, RT3x, RT4x relays	YRTS0626
Optional Accessories	
Retaining clip for RT2, RT3, RT4 relays	YRTS4000
Protection diode module 6-250VDC for S-Relay socket	YRS13250
LED+PD module green 6-24VDC A1+ for S-Relay socket	YRS12024
LED module green 110-240VAC for S-Relay socket	YRS11730
RC-Network module 6-24VAC for S-Relay socket	YRS14524
RC-Network module 110-240VAC for S-Relay socket	YRS14730
Marking tag for YRXT and YRTS socket	YRXT2000