

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable



1400605

<https://www.phoenixcontact.com/au/products/1400605>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PVC, black RAL 9005, free cable end, on Valve connector CI (9.4 mm), with 1 LED, Wiring: Z diode, cable length: 10 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Convenient: increased machine availability thanks to quick and easy diagnostics

## Commercial data

Item number	1400605
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AF1DFA
Product key	AF1DFA
Catalog page	Page 229 (C-2-2019)
GTIN	4046356513258
Weight per piece (including packing)	372 g
Weight per piece (excluding packing)	370 g
Customs tariff number	85444290
Country of origin	PL

## Technical data

### Product properties

Product type	Sensor/actuator cable with valve connector
Application	Standard
Number of positions	3
No. of cable outlets	1
Shielded	no

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	V0
Seal material	TPU
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6.6
Contact surface material	Sn

### Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	24 V AC
	24 V DC
Nominal current $I_N$	4 A

### Valve connector characteristics

Fixing screws	M3 x 29
Pulse power	40 W (at 100 $\mu\text{s}$ square-wave pulse)
Terminal voltage	70 V (at 2 mA constant current)
Reverse voltage	50 V

### Signaling

Status display	1 LED
Status display present	yes

### Connector

#### Connection 1

Type	free cable end
------	----------------

#### Connection 2

Type	Valve connector CI (9.4 mm)
Number of positions	3
	CuSn (Contact)

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable



1400605


<https://www.phoenixcontact.com/au/products/1400605>

Material	Sn (Contact surface)
	PA 6.6 (Contact carrier)
	TPU (Housing)
Protective circuit	Z diode

## Cable/line

Cable length	10 m
--------------	------

### PVC black [PVC]

Dimensional drawing	
Cable weight	38.6 kg/km
UL AWM Style	2464
Number of positions	3
Shielded	no
Cable type	PVC black [PVC]
Conductor structure signal line	16x 0.20 mm
AWG signal line	20
Conductor cross section	3x 0.5 mm <sup>2</sup>
Wire diameter incl. insulation	1.5 mm ±0.05 mm
External cable diameter	4.80 mm ±0.2 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	black 1, black 2, green/yellow
Overall twist	3 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	≥ 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Minimum bending radius, fixed installation	5 x D
Smallest bending radius, fixed installation	24 mm
Flame resistance	DIN VDE 0482 DIN EN 50265-2-1
Resistance to oil	in accordance with DIN EN 60811-2-1
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -5 °C ... 80 °C (Cable, flexible installation)

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable



1400605

<https://www.phoenixcontact.com/au/products/1400605>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation) (Valve connector)	-20 °C ... 85 °C (Valve connector)

## Standards and regulations

### Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable

1400605

<https://www.phoenixcontact.com/au/products/1400605>

## Drawings

Dimensional drawing




Valve connector, type CI

Dimensional drawing



Valve connector, type CI, side view

Schematic diagram

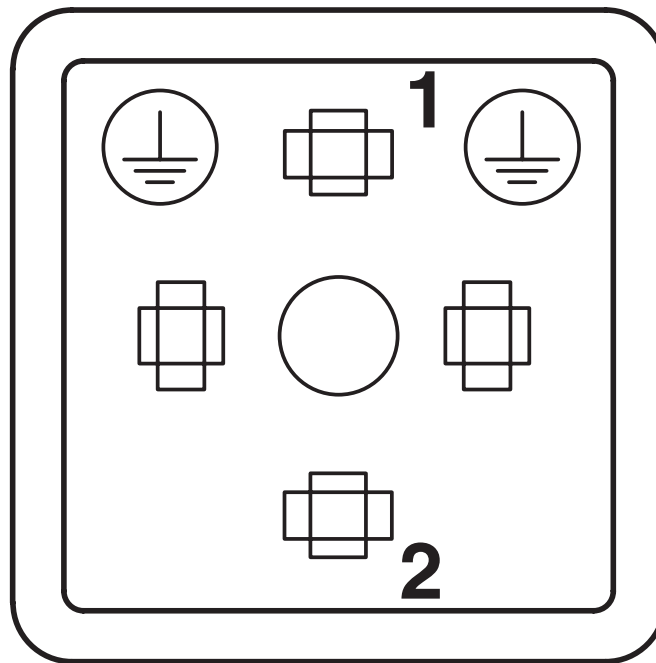

Valve connector connector pin assignment, type CI

Circuit diagram



Contact assignment of the valve plug

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable




1400605

<https://www.phoenixcontact.com/au/products/1400605>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1400605>

 <b>CSAus</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	24 V	6 A	-	-

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable



1400605

<https://www.phoenixcontact.com/au/products/1400605>

## Classifications

### ECLASS

ECLASS-13.0

27060312

### ETIM

ETIM 9.0

EC001855

### UNSPSC

UNSPSC 21.0

31251500

# SAC-3P-10,0-PVC/CI-1L-Z - Sensor/actuator cable



1400605

<https://www.phoenixcontact.com/au/products/1400605>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Diboron trioxide(CAS: 1303-86-2)
	Lead monoxide (lead oxide)(CAS: 1317-36-8)

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd

Unit 7, 2-8 South Street

Rydalmere NSW 2116

1300 786 411

[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)