

**■ DATASHEET:**  
MODULAR PUSH-BUTTON SWITCH 1 NO+1 NC 16A + 230V AC/DC LED



BZ117531


**■ SCHRACK-INFO**

- LED-indicator
- force guided lift terminal


**■ TECHNICAL DATA**

Function	push-button
Function of contact	1 NO and 1 NC
Indicator	LED
LED-color	orange
LED-brightness	15 mcd
Rated voltage - contact	250 V AC
Rated current - contact	16 A
Rated frequency	50/60 Hz
Max. back up fuse	20 A gG
LED-rated voltage	230V AC/DC
Power loss	2W
Cap-dimensions	45mm
Dimensions of sockets	90mm
Width of sockets	17,5 mm (1TE)
Special snap-on mounting	according to IEC/EN 60715
Degree of protection	IP40
Terminals	force-guided lift-terminals with force
Terminal capacity	1-10 mm <sup>2</sup>
Finger and hand touch safe	according to BGV A3, ÖVE-EN 6
Climatic conditions	according to IEC/EN 60068

■ DIMENSIONS

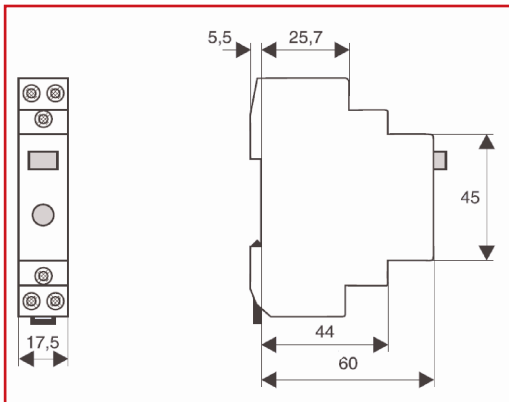

■ WIRING DIAGRAM

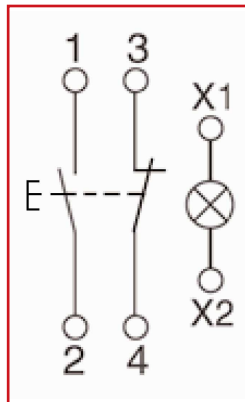

RATED CURRENT / CONTACTS	TE	TYPE	EAN-CODE	ORDER NO.
16 A/1 NO and 1 NC (LED 230V AC/DC)	1	BZ TS16/1S/1OE	9004840406467	BZ117531