

## 28841.6 KES-E 14/24 B GR



Cable entry with membrane for unassembled cables, Sheet thickness 2.5 - 4 mm, Mounting type: Snap-in, Length: 142 mm, Width: 44 mm, IP54, Colour: Grey

**RAL:** Ähnlich 7035

### Business data

|  |                  |
|--|------------------|
| Article number                             | 28841.6          |
| Article name                               | KES-E 14/24 B GR |
| GTIN (EAN)                                 | 4044211234195    |
| Packaging unit                             | 10               |
| Quantity unit                              | PC               |
| Weight per piece (not including packaging) | 44.1 g           |
| Weight per piece (including packaging)     | 44.98 g          |
| Unit of weight                             | G                |
| Customs number                             | 39259020         |
| Country of origin                          | DE               |
| Product description                        | Cable Entry      |
| Colour                                     | Grey             |

### Technical data

#### Dimensions

|                       |        |
|-----------------------|--------|
| Length                | 142 mm |
| Length of wall cutout | 112 mm |
| Width                 | 44 mm  |
| Width of wall cutout  | 36 mm  |
| Height                | 12 mm  |
| Installation height   | 5 mm   |

#### Materials

|                           |        |
|---------------------------|--------|
| Material                  | TPE    |
| Flammability class UL 94  | V-0    |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 90 °C  |
| Sealing material          | TPE    |
| Halogen-free              | ✓      |
| Silicone-free             | ✓      |

#### Further technical data

|  |         |
|--|---------|
| Mounting type                                      | Snap-on |
| Degree of protection                               | IP54    |
| Sheet thickness min.                               | 2.5 mm  |
| Sheet thickness max.                               | 4 mm    |
| NEMA Type  | 1, 12   |
| Number of wires                                    | 14      |
| Number of cables for cable diameters 1.0 - 12.1 mm | 14      |

#### Environmental Product Compliance

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2023-06-14 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

---

### Approvals

---

#### cUL Recognized

---

|                 |                 |
|-----------------|-----------------|
| cUL approval    | C22.2 No. 14-18 |
| cUL File Number | E489821         |
| cUL Recognized  | 1               |

---



#### UL Recognized

---

|                |         |
|----------------|---------|
| UL approval    | UL 508A |
| UL File Number | E489821 |
| UL Recognized  | 1       |
| UL Type Rating | 1, 12   |

---

### Media

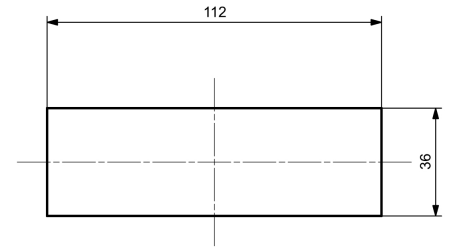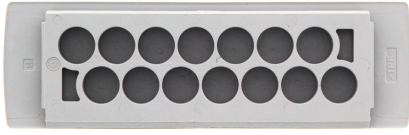

---

### Accessories

---