

TCP 8A - Thermal device circuit breaker



0712291
<https://www.phoenixcontact.com/au/products/0712291>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



1-channel thermal device circuit breaker for protecting loads at 250 V AC / 72 V DC in the event of an overload. For installation on fuse terminal blocks and interfaces for flat plug-in fuse of type C according to standard ISO 8820-3. With fixed nominal current: 8 A

Your advantages

- Fast, replacement part-free recommissioning after an event with the reconnection options
- Easy to retrofit in existing systems with vehicle flat-type fuses with identical pin connector pattern
- System disconnection for maintenance actions via the integrated device switch

Commercial data

Item number	0712291
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	CLA111
Product key	CLA111
Catalog page	Page 401 (C-4-2019)
GTIN	4017918848408
Weight per piece (including packing)	10.975 g
Weight per piece (excluding packing)	10.63 g
Customs tariff number	85362010
Country of origin	ID

TCP 8A - Thermal device circuit breaker



0712291

<https://www.phoenixcontact.com/au/products/0712291>

Technical data

Notes

General	When mounted in rows, the nominal device current can be limited to just 80% or must be oversized accordingly.
---------	---

Product properties

Product type	Thermal device circuit breakers
Type	Male
Number of positions	1
No. of channels	1

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Electrical properties

Fuse type	Automatic device
Fuse	Slow-blow

General

Rated voltage	250 V AC
	65 V DC
	250 V AC (AC according to UL 1077)
	72 V DC (DC according to UL 1077)
Rated current I_N	8 A
Rated surge voltage	2.5 kV
Insulation resistance R_{iso}	> 100 M Ω (500 V DC)
Tripping method	T (thermal)
Device resistance	0.05 Ω
Rated short-circuit switching capacity I_{cn}	64 A (250 V AC / 65 V DC)
	160 A (30 V DC)
Short-circuit switching capacity	2000 A (250 V AC / UL 1077)
	2000 A (72 V DC / UL 1077)
Dielectric strength	3000 V AC (Actuation area)
	1500 V AC (Installation area)
Switching cycles, max.	6000 (At 1 x I_N , low-induction)
	3000 (At 1 x I_N , inductive)
	500 (At 2 x I_N , inductive)
Contact switching type	Type C in accordance with ISO 8820-3

Connection data

Nominal current	8 A
Nominal voltage	250 V AC
	65 V DC

TCP 8A - Thermal device circuit breaker




0712291

<https://www.phoenixcontact.com/au/products/0712291>

Connection method	pluggable
-------------------	-----------

Dimensions

Dimensional drawing



Width	8.2 mm
Height	24.4 mm
Height NS 35/7,5	55 mm
Depth	44.5 mm

Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V-0
Insulating material group	IIIb
Insulating material	PPS

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP40 (Actuation area)
Ambient temperature (operation)	-20 °C ... 60 °C
Altitude	4000 m
Humidity test	240 h, 95 % RH, 40 °C

Standards and regulations

Standards/specifications	EN 60934
--------------------------	----------

Mounting

Mounting type	on base element
---------------	-----------------

TCP 8A - Thermal device circuit breaker


0712291

<https://www.phoenixcontact.com/au/products/0712291>



Drawings

Dimensional drawing

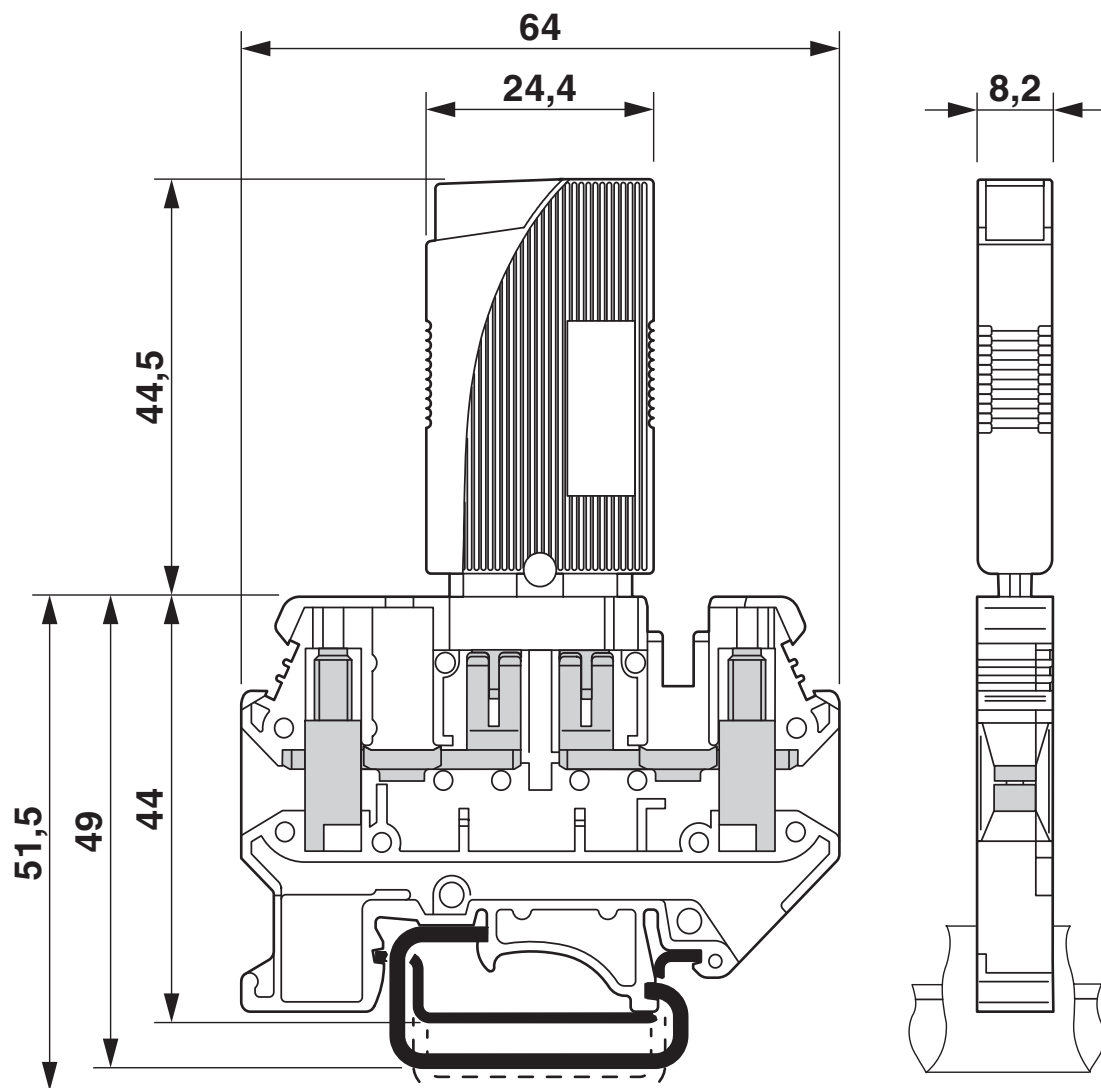


TCP 8A - Thermal device circuit breaker

0712291

<https://www.phoenixcontact.com/au/products/0712291>



Dimensional drawing

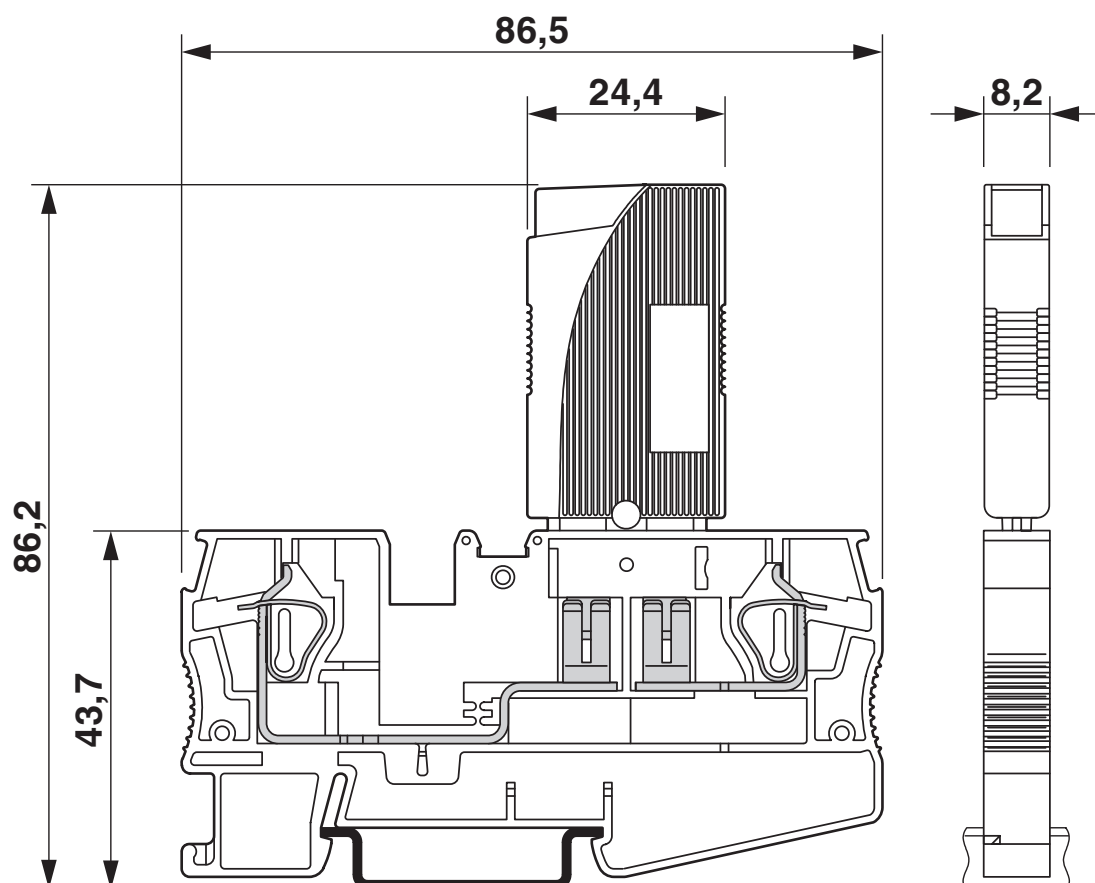

TCP 8A - Thermal device circuit breaker

0712291

<https://www.phoenixcontact.com/au/products/0712291>

Product drawing




The figure shows the product with the base element PT 6-FSI/C-LED 24 (Item No.: 3212172).

TCP 8A - Thermal device circuit breaker



0712291
<https://www.phoenixcontact.com/au/products/0712291>

Application drawing

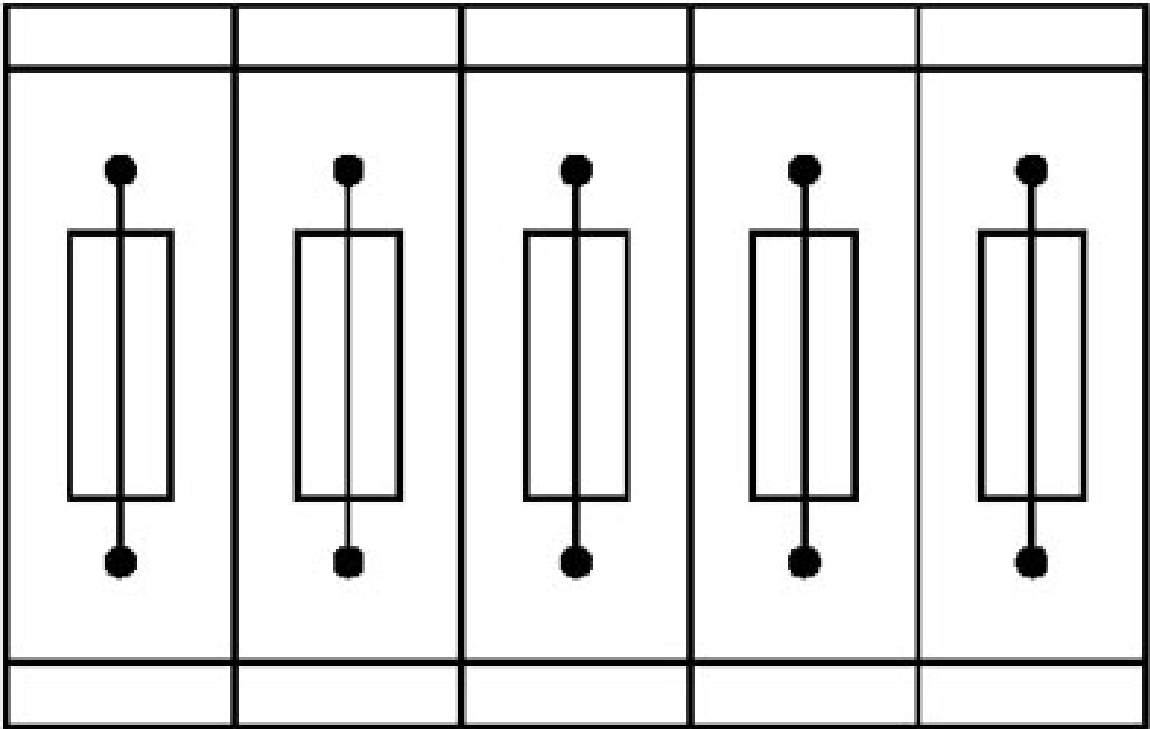


Fuse terminal blocks in interconnected arrangement,
block consisting of 5 fuse terminal blocks

TCP 8A - Thermal device circuit breaker



0712291
<https://www.phoenixcontact.com/au/products/0712291>

Application drawing

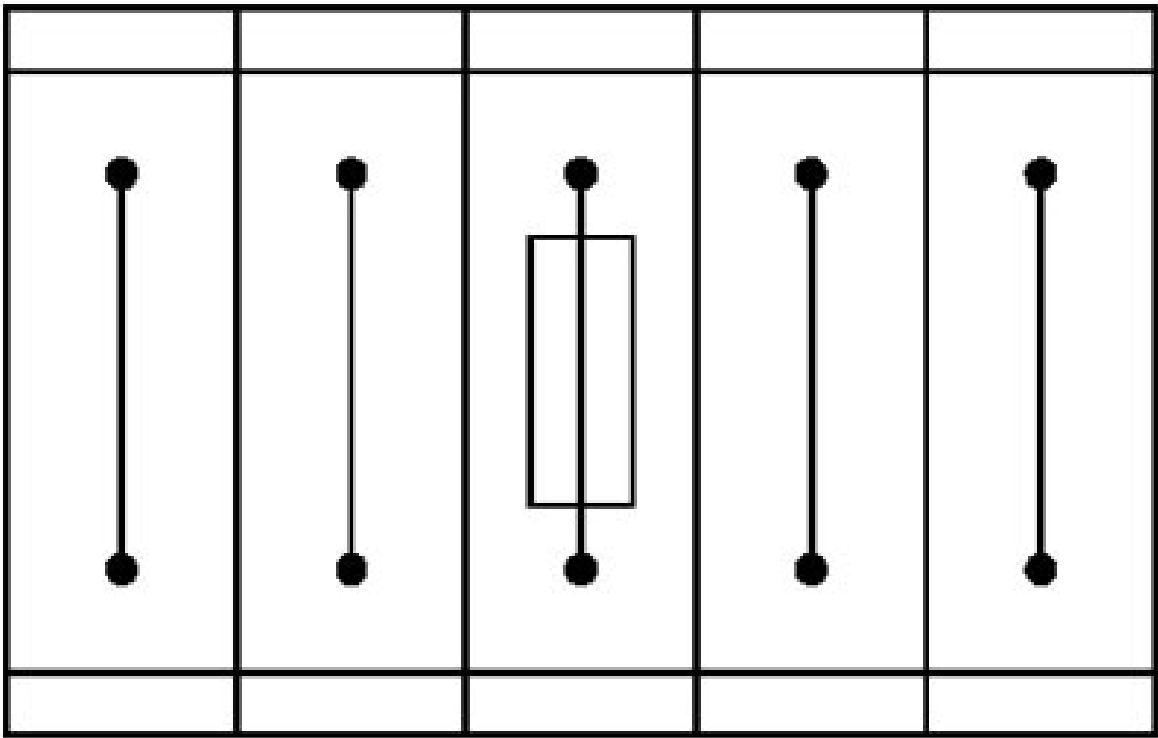


Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks

TCP 8A - Thermal device circuit breaker


0712291


<https://www.phoenixcontact.com/au/products/0712291>

Application drawing

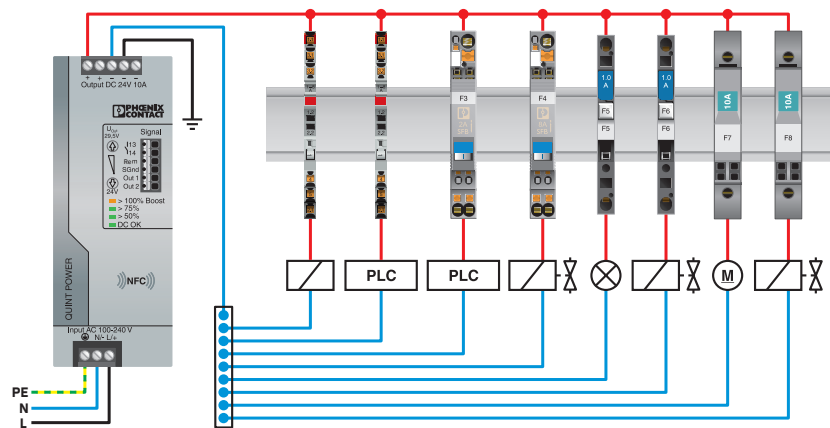

Application drawing

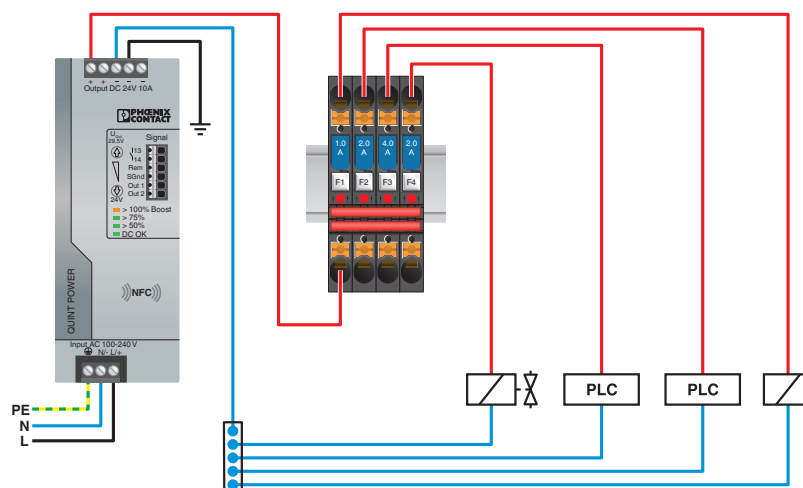

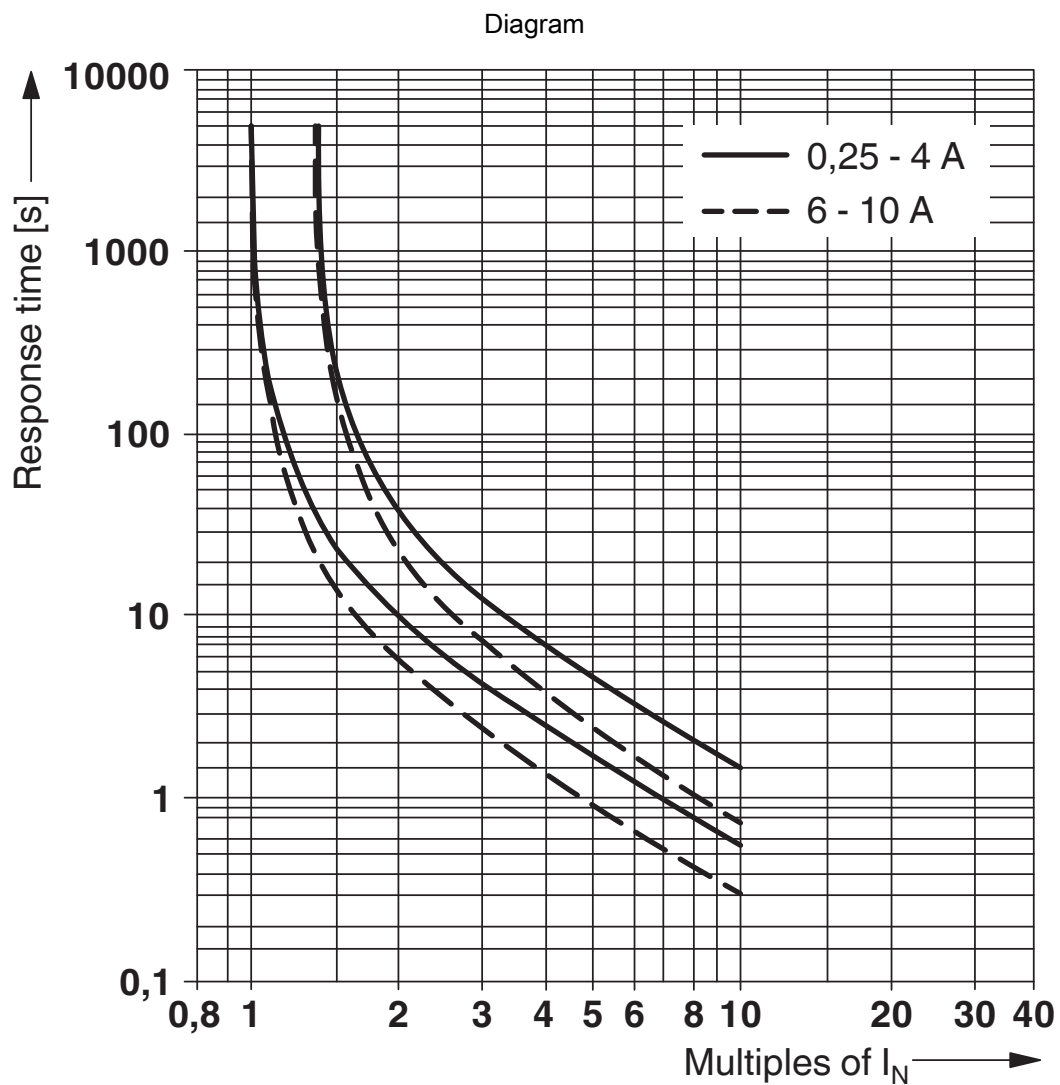

Trigger characteristic

TCP 8A - Thermal device circuit breaker



0712291

<https://www.phoenixcontact.com/au/products/0712291>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/0712291>

	CSA Approval ID: 074317			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	250 V	8 A	-	-

	cUL Recognized Approval ID: FILE E 140459
---	---

	UL Recognized Approval ID: FILE E 140459
---	--

	EAC Approval ID: EAC-Zulassung
---	--

	EAC Approval ID: RU C-DE.A*30.B01546
---	--

	VDE approval of drawings Approval ID: 40034332
---	--

	CCC Approval ID: 2025010307749780
---	---

UAE-RoHS Approval ID: 23-10-88896

TCP 8A - Thermal device circuit breaker



0712291

<https://www.phoenixcontact.com/au/products/0712291>

Classifications

ECLASS

ECLASS-13.0	27140401
-------------	----------

ETIM

ETIM 9.0	EC003538
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

TCP 8A - Thermal device circuit breaker



0712291
<https://www.phoenixcontact.com/au/products/0712291>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au