


NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable



1422211

<https://www.phoenixcontact.com/au/products/1422211>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch cable, CAT6_A, 4-pair, shielded, connection not crossed (line), assembled at both ends with RJ45/IP20 connectors, outer sheath material: PUR, length: 1.5 m

Your advantages

- Perfect for industrial applications
- Perfect for office, building, and protected industrial applications (e.g., in control cabinets)
- Compact angle

Commercial data

Item number	1422211
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	ABNABF
Product key	ABNABF
GTIN	4055626292656
Weight per piece (including packing)	94.6 g
Weight per piece (excluding packing)	80.286 g
Customs tariff number	85444210
Country of origin	PL

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable



1422211

<https://www.phoenixcontact.com/au/products/1422211>

Technical data

Product properties

Product type	Data cable preassembled
Product family	RJ45 INDUSTRIAL IE8 CAT6A
Sensor type	Ethernet
Number of positions	8
Shielded	yes

Electrical properties


Rated voltage (III/3)	72 V (DC)
Nominal voltage U_N	48 V
Nominal current I_N	0.5 A
Transmission characteristics (category)	CAT6 _A
Transmission speed	10 Gbps
Wave impedance	100 Ω

Material specifications

Outer sheath, material	PUR
Conductor material	Bare Cu litz wires

Connector

Connection 1

Dimensional drawing	 <p>Connector pin assignment plug RJ45</p>
Type	RJ45 Plug, straight, 8-position
Number of positions	8
Signal type/category	Ethernet CAT6 _A , 10 Gbps CC-Link IE CAT6 _A , 10 Gbps
Insertion/withdrawal cycles	≥ 750
Insulation resistance	$\geq 100 \Omega$
Overvoltage category	I
Degree of pollution	2
Material Contact	CuSn
Material Contact surface	Ni/Au
Material Contact carrier	PC

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable




1422211

<https://www.phoenixcontact.com/au/products/1422211>

Material Housing	PA
Color (Housing)	gray
Flammability rating according to UL 94	V2
Degree of protection	IP20 (RJ45 connector)
Ambient temperature (operation)	-25 °C ... 60 °C


Connection 2

Dimensional drawing	 <p>Connector pin assignment plug RJ45</p>
Type	RJ45 Plug, straight, 8-position
Number of positions	8
Signal type/category	Ethernet CAT6 _A , 10 Gbps CC-Link IE CAT6 _A , 10 Gbps
Insertion/withdrawal cycles	≥ 750
Insulation resistance	≥ 100 Ω
Overvoltage category	I
Degree of pollution	2
Material Contact	CuSn
Material Contact surface	Ni/Au
Material Contact carrier	PC
Material Housing	PA
Color (Housing)	gray
Flammability rating according to UL 94	V2
Degree of protection	IP20 (RJ45 connector)
Ambient temperature (operation)	-25 °C ... 60 °C

Cable/line

Cable length	1.50 m
--------------	--------

Ethernet 10 Gbit [94F]

Dimensional drawing	
---------------------	--------------------------------------------------------------------------------------

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable




1422211

<https://www.phoenixcontact.com/au/products/1422211>

Shielded	yes
UL AWM Style	21238 (80 °C / 600 V)
Cable type	Ethernet 10 Gbit
Cable type (abbreviation)	94F
Signal type/category	Ethernet CAT6 _A (IEC 11801), 10 Gbps
Cable structure	4x2xAWG26/7; S/FTP
External cable diameter	6.40 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	water blue RAL 5021
Conductor material	Bare Cu litz wires
AWG signal line	26
Conductor cross section	4x 2x 0.14 mm ²
Material wire insulation	Foamed PE
Wire diameter incl. insulation	1 mm ±0.05 mm
Single wire, color	white/blue-blue, white/orange-orange, white/green-green, white/brown-brown
Twisted pairs	2 cores to the pair
Overall twist	4 pairs for core
Shielding	Tinned copper braided shield
Optical shield covering	70 %
Nominal voltage, cable	≤ 100 V
Test voltage Core/Core	2000 V (50 Hz, 1 min.)
Test voltage Core/Shield	2000.00 V (50 Hz, 1 min.)
Cable insulation resistance	≥ 500 MΩ*km
Wave impedance	100 Ω ±5 Ω (at 100 MHz)
Loop resistance	≤ 290.00 Ω/km
Minimum bending radius, fixed installation	4 x D
Minimum bending radius, flexible installation	8 x D
Halogen-free	according to IEC 60754-1
Resistance to oil	in accordance with DIN EN 60811-404
Flame resistance	according to IEC 60332-1-2
	in accordance with UN ECE-R 118.03
	according to CSA C 22.2 No. 210-FT1
Ambient temperature (operation)	-20 °C ... 80 °C (Cable, flexible installation)
	-40 °C ... 80 °C (cable, fixed installation)

Drawings

Schematic diagram

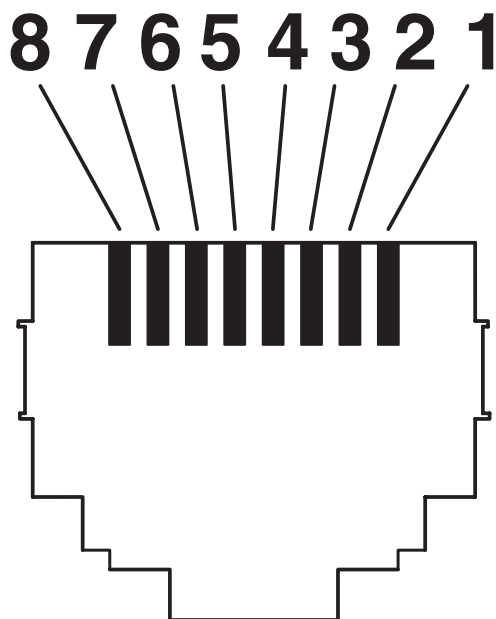

Connector pin assignment plug RJ45

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable



1422211

<https://www.phoenixcontact.com/au/products/1422211>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1422211>



EAC

Approval ID: 19060508

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable



1422211

<https://www.phoenixcontact.com/au/products/1422211>

Classifications

ECLASS

ECLASS-13.0	27060307
-------------	----------

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

NBC-R4AC-10G/1,5-94F/R4AC-10G - Patch cable



1422211
<https://www.phoenixcontact.com/au/products/1422211>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au