

3007916

<https://www.phoenixcontact.com/au/products/3007916>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20 / 5 x 25 / 5 x 30, nom. voltage: 800 V, nominal current: 6.3 A, number of positions: 1, connection method: Screw connection, Rated cross section: 1 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 4 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, NS 32, color: gray

Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3007916       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Sales key                            | BE1234        |
| Product key                          | BE1234        |
| GTIN                                 | 4017918338886 |
| Weight per piece (including packing) | 18.79 g       |
| Weight per piece (excluding packing) | 18.79 g       |
| Customs tariff number                | 85369095      |
| Country of origin                    | TR            |

# UK 5-HESI GY - Fuse modular terminal block



3007916

<https://www.phoenixcontact.com/au/products/3007916>

## Technical data

### Notes

|                        |  |
|------------------------|--|
| Note regarding marking | For terminal marking, please use marking material with 8.2 mm pitch. |
| Note regarding marking | For lever marking, please use marking material with 6.2 mm pitch.    |

### Product properties

|                       |                     |
|-----------------------|---------------------|
| Product type          | Fuse terminal block |
| Number of positions   | 1                   |
| Number of connections | 2                   |
| Number of rows        | 1                   |
| Potentials            | 1                   |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|   |                              |
|---|------------------------------|
| Fuse type                                       | Glass / ceramics / ...       |
| Rated surge voltage                             | 8 kV                         |
| Maximum power dissipation for nominal condition | 1.02 W                       |
| Fuse  | G / 5 x 20 / 5 x 25 / 5 x 30 |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

### Level 1 above 1 below 1

|   |   |
|---|---|
| Screw thread  | M3  |
| Tightening torque   | 0.6 ... 0.8 Nm                              |
| Stripping length  | 8 mm  |
| Internal cylindrical gage   | A4  |
| Connection in acc. with standard                                  | IEC 60947-7-3                               |
| Conductor cross section rigid                                     | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Cross section AWG   | 24 ... 12 (converted acc. to IEC)           |
| Conductor cross section flexible                                  | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section, flexible [AWG]                           | 24 ... 12 (converted acc. to IEC)           |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>  |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>  |
| Cross-section with insertion bridge, rigid                        | 4 mm <sup>2</sup>                           |
| Cross-section with insertion bridge, flexible                     | 4 mm <sup>2</sup>                           |
| 2 conductors with same cross section, solid                       | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with same cross section, flexible                    | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |

# UK 5-HESI GY - Fuse modular terminal block



3007916

<https://www.phoenixcontact.com/au/products/3007916>

|   |  |
|---|--|
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Nominal current   | 6.3 A  |
| Maximum load current  | 6.3 A  |
| Nominal voltage   | 800 V (As a fuse terminal block)             |
| Nominal cross section   | 1 mm <sup>2</sup>                            |
| Connection in acc. with standard  | IEC 60947-7-3                                |
| Conductor cross section rigid   | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| Cross section AWG   | 24 ... 12 (converted acc. to IEC)            |
| Conductor cross section flexible  | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>    |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Cross-section with insertion bridge, rigid  | 4 mm <sup>2</sup>                            |
| Cross-section with insertion bridge, flexible   | 4 mm <sup>2</sup>                            |
| 2 conductors with same cross section, solid   | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible  | 0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>  |
| Nominal current   | 6.3 A  |
| Maximum load current  | 6.3 A  |
| Nominal voltage   | 800 V (As a disconnect terminal block)       |
| Nominal cross section   | 1 mm <sup>2</sup>                            |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 8.2 mm  |
| Height             | 72.5 mm |
| Depth on NS 32     | 61.5 mm |
| Depth on NS 35/7,5 | 56.5 mm |
| Depth on NS 35/15  | 64 mm   |

## Material specifications

|   |                 |
|---|-----------------|
| Color   | gray (RAL 7042) |
| Flammability rating according to UL 94                                  | V0              |
| Insulating material group   | I               |
| Insulating material   | PA              |
| Static insulating material application in cold                          | -60 °C          |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C          |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C          |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3     |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3     |

# UK 5-HESI GY - Fuse modular terminal block



3007916

<https://www.phoenixcontact.com/au/products/3007916>

|   |             |
|---|-------------|
| Fire protection for rail vehicles (DIN EN 45545-2) R26  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)        | 27,5 MJ/kg  |
| Surface flammability NFPA 130 (ASTM E 162)              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                  | passed      |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Oscillation/broadband noise

|                        |  |
|------------------------|--|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03              |
| Spectrum               | Long life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$   |
| ASD level              | $1.857 \text{ (m/s}^2\text{)}^2\text{/Hz}$       |
| Acceleration           | 0.8g   |
| Test duration per axis | 5 h  |
| Test directions        | X-, Y- and Z-axis                                |
| Result                 | Test passed                                      |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

### Ambient conditions

|  |  |
|--|--|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)  |
| Ambient temperature (assembly)           | -5 °C ... 70 °C  |
| Ambient temperature (actuation)          | -5 °C ... 70 °C  |
| Permissible humidity (operation)         | 20 % ... 90 %  |
| Permissible humidity (storage/transport) | 30 % ... 70 %  |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|                                  | IEC 60947-7-3 |

## Mounting

# UK 5-HESI GY - Fuse modular terminal block




3007916

<https://www.phoenixcontact.com/au/products/3007916>

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |
|               | NS 32     |

## Drawings

Circuit diagram

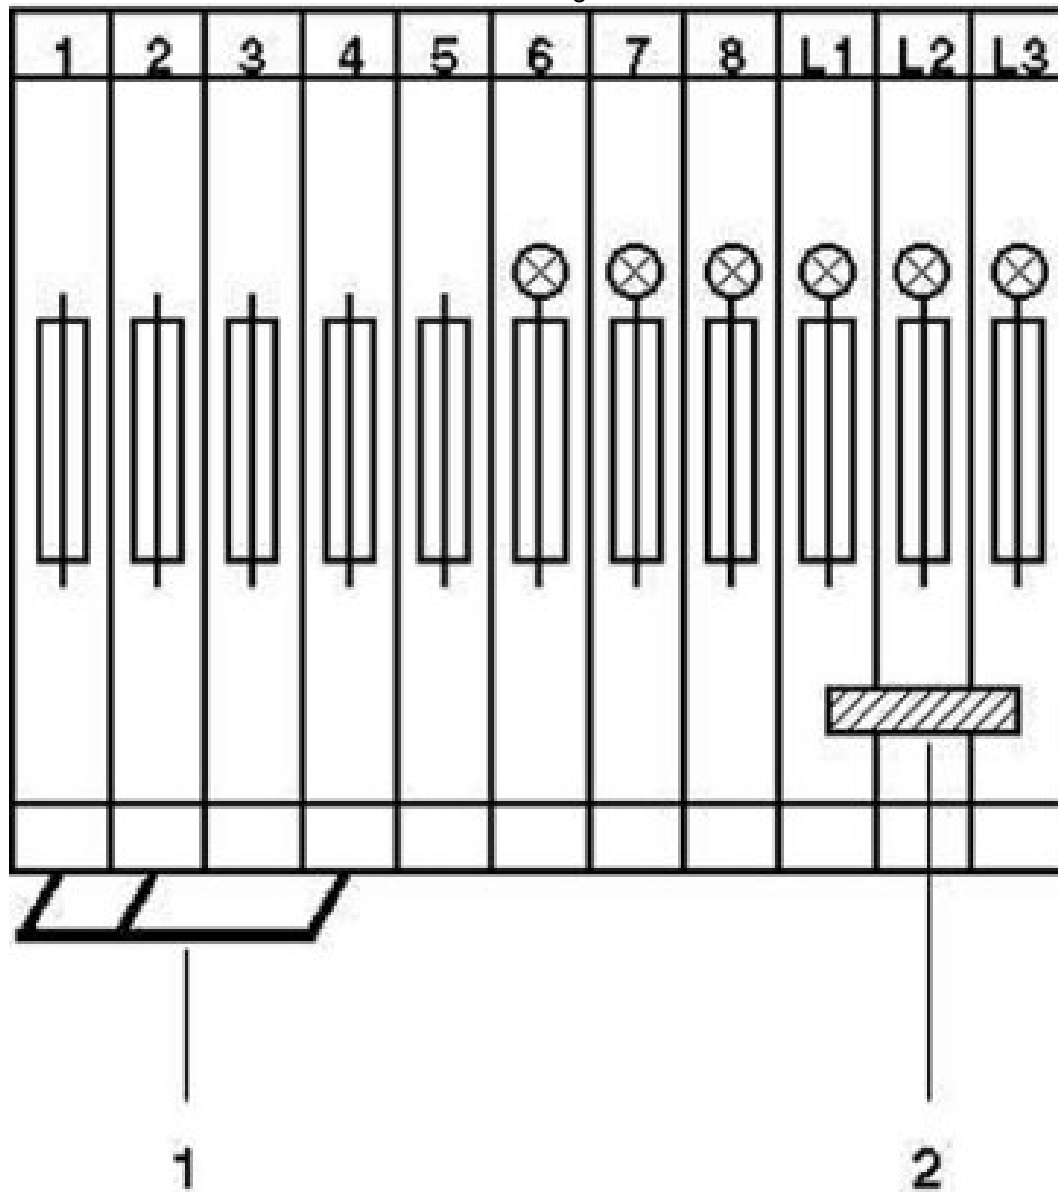

1 = insertion bridge  
2 = fixed bridge

# UK 5-HESI GY - Fuse modular terminal block





3007916

<https://www.phoenixcontact.com/au/products/3007916>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3007916>

|  <b>CSA</b><br>Approval ID: 13631 |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B  |                       |                       |                   |                             |
|  | 600 V                 | 6.3 A                 | 28 - 10           | -                           |
| Use group C  |                       |                       |                   |                             |
|  | 600 V                 | 6.3 A                 | 28 - 10           | -                           |

|  <b>cULus Recognized</b><br>Approval ID: E60425 |                       |                       |                   |                             |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
| Use group B  |                       |                       |                   |                             |
|  | 600 V                 | 12 A                  | 26 - 10           | -                           |
| Use group C  |                       |                       |                   |                             |
|  | 600 V                 | 12 A                  | 26 - 10           | -                           |
| Use group F  |                       |                       |                   |                             |
|  | 600 V                 | 12 A                  | 26 - 10           | -                           |

|  <b>EAC</b><br>Approval ID: KZ7500651131219505 |  |  |  |  |
|---|--|--|--|--|
|---|--|--|--|--|

# UK 5-HESI GY - Fuse modular terminal block



3007916

<https://www.phoenixcontact.com/au/products/3007916>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250113 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000899 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|



# UK 5-HESI GY - Fuse modular terminal block



3007916

<https://www.phoenixcontact.com/au/products/3007916>

## Environmental product compliance

### EU RoHS

|   |      |
|---|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|  |   |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50   |
|  | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                      |
|-------------------------------------|----------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
|-------------------------------------|----------------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)