

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distribution block, Basic terminal block with feed-in without protective conductor function, nom. voltage: 450 V, nominal current: 24 A, number of connections: 19, connection method: Push-in connection, Load contact, cross section: 0.14 mm<sup>2</sup> - 4 mm<sup>2</sup>, Push-in connection, Line contact, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup> - 10 mm<sup>2</sup>, mounting type: Free-hanging

## Your advantages

- Space savings of up to 50 % on the DIN rail, thanks to transverse mounting
- Flexible use, thanks to DIN rail mounting, direct mounting or adhesive mounting
- Time savings of up to 80 %, thanks to ready-to-mount blocks without manual bridging
- Time-saving conductor connection, thanks to tool-free Push-in direct connection technology
- Clear wiring, thanks to eleven different color variants

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1091670       |
| Packing unit                         | 8 pc          |
| Minimum order quantity               | 8 pc          |
| Sales key                            | BEA124        |
| Product key                          | BEA124        |
| GTIN                                 | 4055626905532 |
| Weight per piece (including packing) | 40.37 g       |
| Weight per piece (excluding packing) | 40 g          |
| Customs tariff number                | 85369010      |
| Country of origin                    | PL            |

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

## Technical data

### Notes

|                     |   |
|---------------------|---|
| Notes on connection | Connection in accordance with IEC 60998-2-2 (no protective conductor function terminal) |
|---------------------|---|

### General

|      |  |
|------|--|
| Note | The maximum load current of a single clamping unit must not be exceeded.<br><br>For power distribution applications, IEC 60364-4-43:2008; modified + corrigendum Okt. 2008 (DIN VDE 0100-430:2010-10) section 433.2 ff must be observed! |
|------|--|

### Product properties

|                       |                            |
|-----------------------|----------------------------|
| Product type          | Distributor terminal block |
| Number of connections | 19                         |
| Number of rows        | 1                          |
| Potentials            | 1                          |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|   |        |
|---|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 0.77 W |

### Connection data

|                                 |                     |
|---------------------------------|---------------------|
| Service Entrance                | yes                 |
| Number of connections per level | 19                  |
| Nominal cross section           | 2.5 mm <sup>2</sup> |
| Rated cross section AWG         | 14                  |

### Load contact

|   |  |
|---|--|
| Stripping length  | 8 mm ... 10 mm   |
| Internal cylindrical gage   | A3   |
| Connection in acc. with standard                                  | IEC 60998-2-2  |
| Conductor cross section rigid                                     | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Cross section AWG   | 26 ... 12 (converted acc. to IEC)                      |
| Conductor cross section flexible                                  | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>             |
| Conductor cross section, flexible [AWG]                           | 26 ... 12 (converted acc. to IEC)                      |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>           |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>           |
| Nominal current   | 24 A   |
| Maximum load current  | 32 A (with 4 mm <sup>2</sup> conductor cross section)  |
| Maximum total current   | 57 A (with 10 mm <sup>2</sup> conductor cross section) |

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

|                 |       |
|-----------------|-------|
| Nominal voltage | 450 V |
|-----------------|-------|

## Line contact

|   |  |
|---|--|
| Stripping length  | 10 mm ... 12 mm  |
| Connection in acc. with standard  | IEC 60998-2-2  |
| Conductor cross section rigid   | 0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>             |
| Cross section AWG   | 20 ... 8 (converted acc. to IEC)                       |
| Conductor cross section flexible  | 0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>             |
| Conductor cross section, flexible [AWG]   | 20 ... 8 (converted acc. to IEC)                       |
| Conductor cross-section flexible (ferrule without plastic sleeve)   | 0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>              |
| Flexible conductor cross section (ferrule with plastic sleeve)  | 0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>              |
| Conductor cross-section flexible (2 conductors with the same cross-section, with TWIN ferrule and plastic sleeve) | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>            |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve                         | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>            |
| Nominal current   | 41 A (with 6 mm <sup>2</sup> conductor cross section)  |
| Maximum load current  | 57 A (with 10 mm <sup>2</sup> conductor cross section) |
| Nominal cross section   | 6 mm <sup>2</sup>                                      |

## Load contact Connection cross sections directly pluggable

|   |  |
|---|--|
| Conductor cross section rigid                                     | 0.34 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section, rigid [AWG]                              | 24 ... 12 (converted acc. to IEC)            |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |

## Line contact Connection cross sections directly pluggable

|   |  |
|---|--|
| Conductor cross section rigid                                     | 1 mm <sup>2</sup> ... 10 mm <sup>2</sup> |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 1 mm <sup>2</sup> ... 6 mm <sup>2</sup>  |
| Flexible conductor cross section (ferrule with plastic sleeve)    | 1 mm <sup>2</sup> ... 6 mm <sup>2</sup>  |

## Dimensions

|        |         |
|--------|---------|
| Width  | 56.5 mm |
| Height | 28.6 mm |
| Depth  | 21.7 mm |

## Material specifications

|   |              |
|---|--------------|
| Color   | green-yellow |
| Flammability rating according to UL 94                                  | V0           |
| Insulating material group   | I            |
| Insulating material   | PA           |
| Static insulating material application in cold                          | -60 °C       |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C       |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C       |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

|   |             |
|---|-------------|
| Fire protection for rail vehicles (DIN EN 45545-2) R24  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                  | passed      |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Mechanical tests

### Attachment on the carrier

|                         |             |
|-------------------------|-------------|
| DIN rail/fixing support | NS 35/NS 15 |
| Result                  | Test passed |

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |  |
|------------------------|--|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03            |
| Spectrum               | Long life test category 2, bogie-mounted       |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$ |
| ASD level              | $6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$      |
| Acceleration           | 3.12g  |
| Test duration per axis | 5 h  |
| Test directions        | X-, Y- and Z-axis                              |
| Result                 | Test passed                                    |

### Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 30g                                 |
| Shock duration                 | 18 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

### Ambient conditions

|   |  |
|---|--|
| Ambient temperature (operation)         | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)  |

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

|  |                 |
|--|-----------------|
| Ambient temperature (assembly)           | -5 °C ... 70 °C |
| Ambient temperature (actuation)          | -5 °C ... 70 °C |
| Permissible humidity (operation)         | 20 % ... 90 %   |
| Permissible humidity (storage/transport) | 30 % ... 70 %   |

## Standards and regulations


|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60998-2-2 |
|                                  | IEC 60998-2-2 |

## Mounting

|               |              |
|---------------|--------------|
| Mounting type | Free-hanging |
|---------------|--------------|

## Drawings

Circuit diagram

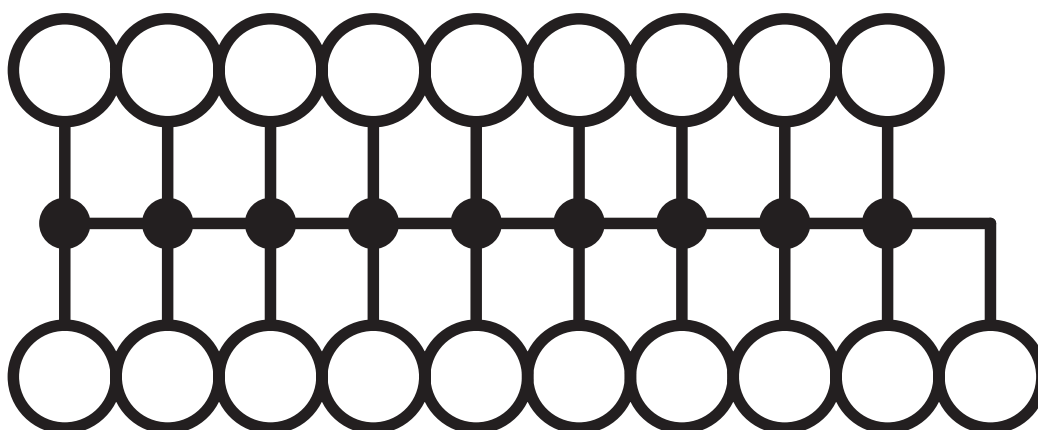

# PTFIX 6/18X2,5 GNYE - Distribution block




1091670

<https://www.phoenixcontact.com/au/products/1091670>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/1091670>

 **CSA**  
Approval ID: 158887

 **EAC**  
Approval ID: RU C-DE.BL08.B.00644

 **IECEE CB Scheme**  
Approval ID: DE1-63086

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 450 V                 | 41 A                  | -                 | - 6                         |


 **VDE Zeichengenehmigung**  
Approval ID: 40047798


|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 450 V                 | 41 A                  | -                 | -                           |

 **cULus Recognized**  
Approval ID: E60425

**DNV**  
Approval ID: TAE00002TT-05

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 500 V                 | 24 A                  | -                 | -                           |

 **BV**  
Approval ID: 59146/A0 BV

 **EAC**  
Approval ID: KZ7500651131219505

# PTFIX 6/18X2,5 GNYE - Distribution block



1091670

<https://www.phoenixcontact.com/au/products/1091670>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250118 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000897 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|



# PTFIX 6/18X2,5 GNYE - Distribution block



1091670  
<https://www.phoenixcontact.com/au/products/1091670>

## Environmental product compliance

|   |  |
|---|--|
| EU RoHS                                 |  |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd  
Unit 7, 2-8 South Street  
Rydalmere NSW 2116  
1300 786 411  
[customerservice@phoenixcontact.com.au](mailto:customerservice@phoenixcontact.com.au)