

Al 1,5 - 8 BK - Ferrule

3200043

<https://www.phoenixcontact.com/au/products/3200043>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ferrule, Length contact range: 8 mm, sleeve length: 14 mm, color: black



Your advantages

- The ferrules with plastic sleeve are made from soft tin-plated electrolytic copper
- The insulation reliability of close connections is increased and the splicing of wires is prevented

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 3200043 |
| Packing unit | 100 pc |
| Minimum order quantity | 100 pc |
| Sales key | BH3411 |
| Product key | BH3411 |
| Catalog page | Page 481 (C-3-2019) |
| GTIN | 4017918093693 |
| Weight per piece (including packing) | 0.119 g |
| Weight per piece (excluding packing) | 0.119 g |
| Customs tariff number | 85369010 |
| Country of origin | DE |

Al 1,5 - 8 BK - Ferrule

3200043

<https://www.phoenixcontact.com/au/products/3200043>



Technical data

Product properties


| | |
|--------------------|---|
| Product type | Cable end sleeve |
| Set comprises | 1202072 CRIMPSET 6 |
| Conductor category | stranded conductors, class 2, 5, 6 / B, C, K, M |
| Product property | UL certified |
| | Made from tin-plated electrolytic copper |
| | Design in accordance with DIN 46228-1 and UL 486F |
| | With "Easy Entry" (conical insertion area) |
| | Plastic collar made of polypropylene |
| | Halogen-free |
| | Long/short-term temperature: +105°C/+120°C |

Connection data

Conductor connection

| | |
|---------------------------------------|---------------------|
| Conductor cross section flexible max. | 1.5 mm ² |
| Conductor cross section AWG max. | 16 |
| Stripping length | 11 mm |

Dimensions
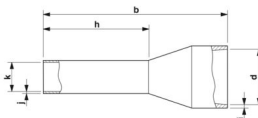
| | |
|---|--|
| Dimensional drawing |  |
| Sleeve length | 14 mm |
| Length contact range | 8 mm |
| Maximum stripping length | 11 mm |
| Ferrule diameter | 1.7 mm |
| Sleeve wall thickness | 0.15 mm |
| Insulating collar thickness | 0.3 mm |
| Inner dimensions of the insulating collar | 3.4 mm |

Material specifications

| | |
|--|--------------------------------|
| Color | black (RAL 9005) |
| Material | CU-DHP |
| Flammability rating according to UL 94 | HB |
| Coating | galvanically tin-plated |
| Surface characteristics | Tin-plated |
| Components | free from silicone and halogen |

Mechanical properties

Al 1,5 - 8 BK - Ferrule



3200043

<https://www.phoenixcontact.com/au/products/3200043>

Technical data

| | |
|---------------|-------|
| Sleeve length | 14 mm |
|---------------|-------|

Environmental and real-life conditions

Ambient conditions


| | |
|------------------------|---|
| Permanent temperature | 105 °C (-40 °C no load / 0 °C dynamic load) |
| Short-term temperature | 120 °C |

Standards and regulations

| | |
|------------------------------|-------------|
| Design according to standard | DIN 46228-4 |
| | UL 486F-E |
| | NFC 63-023 |

Drawings

Dimensional drawing

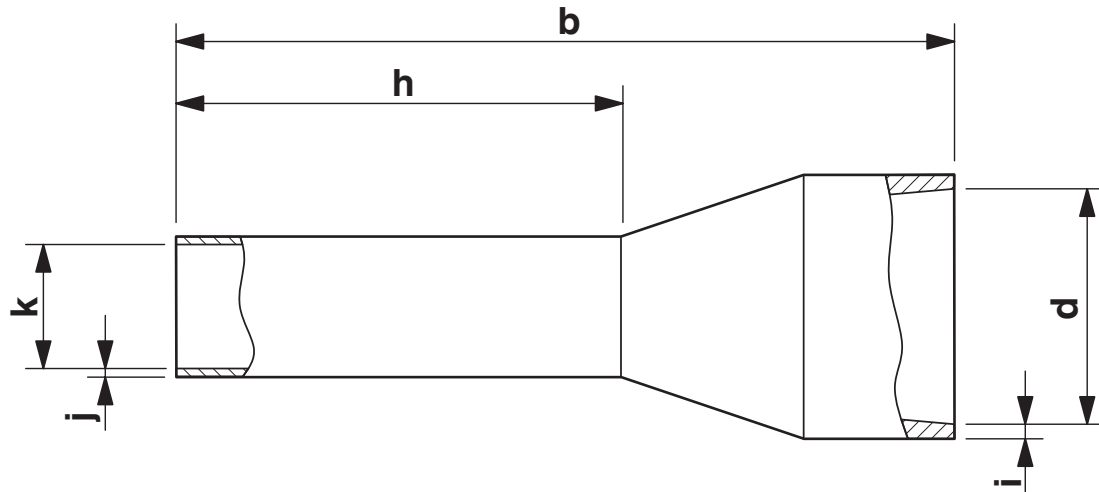

Sleeve length (b), length contact range (h), insulating collar inner dimension (d), sleeve diameter (k), insulating collar thickness (i), sleeve wall thickness (j)

AI 1,5 - 8 BK - Ferrule

3200043

<https://www.phoenixcontact.com/au/products/3200043>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/au/products/3200043>



cULus Listed

Approval ID: E488001

AI 1,5 - 8 BK - Ferrule



3200043

<https://www.phoenixcontact.com/au/products/3200043>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27400201 |
|-------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC000005 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 27121700 |
|-------------|----------|

AI 1,5 - 8 BK - Ferrule



3200043
<https://www.phoenixcontact.com/au/products/3200043>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT PTY Ltd
Unit 7, 2-8 South Street
Rydalmere NSW 2116
1300 786 411
customerservice@phoenixcontact.com.au